

# JDF®-2S

Height: 33.4" Width: 10.5" Depth: 27.0"  
(84.8cm) (26.7cm) (68.6cm)



- Patented High Intensity Mixing System delivers consistent quality beverages in the cup - cup after cup, from the top of the cup to the bottom of the cup
- Quick dispense with 1.0 to 1.5oz (29.6 to 44.4mL) per second flow rate
- 7" (17.8cm) cup clearance accommodates most juice containers
- Both push and hold dispense and optional single size portion control dispense available in the same dispenser
- One dispenser delivers both frozen and ambient concentrate products to maximize profitability by providing greater flexibility in product offerings
- Service friendly design makes set up and maintenance simple
- Burst Capacity: At rate of one 12 oz drink/min, 70 drinks before exceeding 41°F (75°F ambient and 75°F incoming water temp)
- Pumps and Mixes most 2+1 to 11+1 concentrates accurately and consistently, including 4+1 and 5+1 high viscosity concentrates

Agency:



## Specifications

**Product #:** 37900.0001

**Flavors:** 2 Flavors

**Water Access:** Plumbed

**Finish:** Black

**Door:** Un-Lit

**Refrigerant:** R-134A

**Ice Bank:** 8.00 lbs (3.629 kgs)

**Dispense:** Push Button

## Additional Features

## Electrical & Capacity

| Volts* | Amps | Watts | Cord Attached | Plug Type  | 8oz cups/hr<br>236ml cups/hr | Input H <sub>2</sub> O Temp. | Phase | # Wires plus Ground | Hertz |
|--------|------|-------|---------------|------------|------------------------------|------------------------------|-------|---------------------|-------|
| 120    | 4.5  | 540   | Yes           | NEMA 5-15P | -                            | 60°F (15.5°C)                | 1     | 2                   | 60    |

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

## Plumbing Requirements

| PSI    | kPa     | Fitting Supplied        | Water Flow Required (GPM) |
|--------|---------|-------------------------|---------------------------|
| 20-100 | 138-689 | 3/8" Male Flare Fitting | -                         |

**WARNING:**


## CAD Drawings

| 2D | Revit | KLC |
|----|-------|-----|
| ●  |       |     |



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit [bunn.com](http://bunn.com).

Last Updated:  
08/15/2024

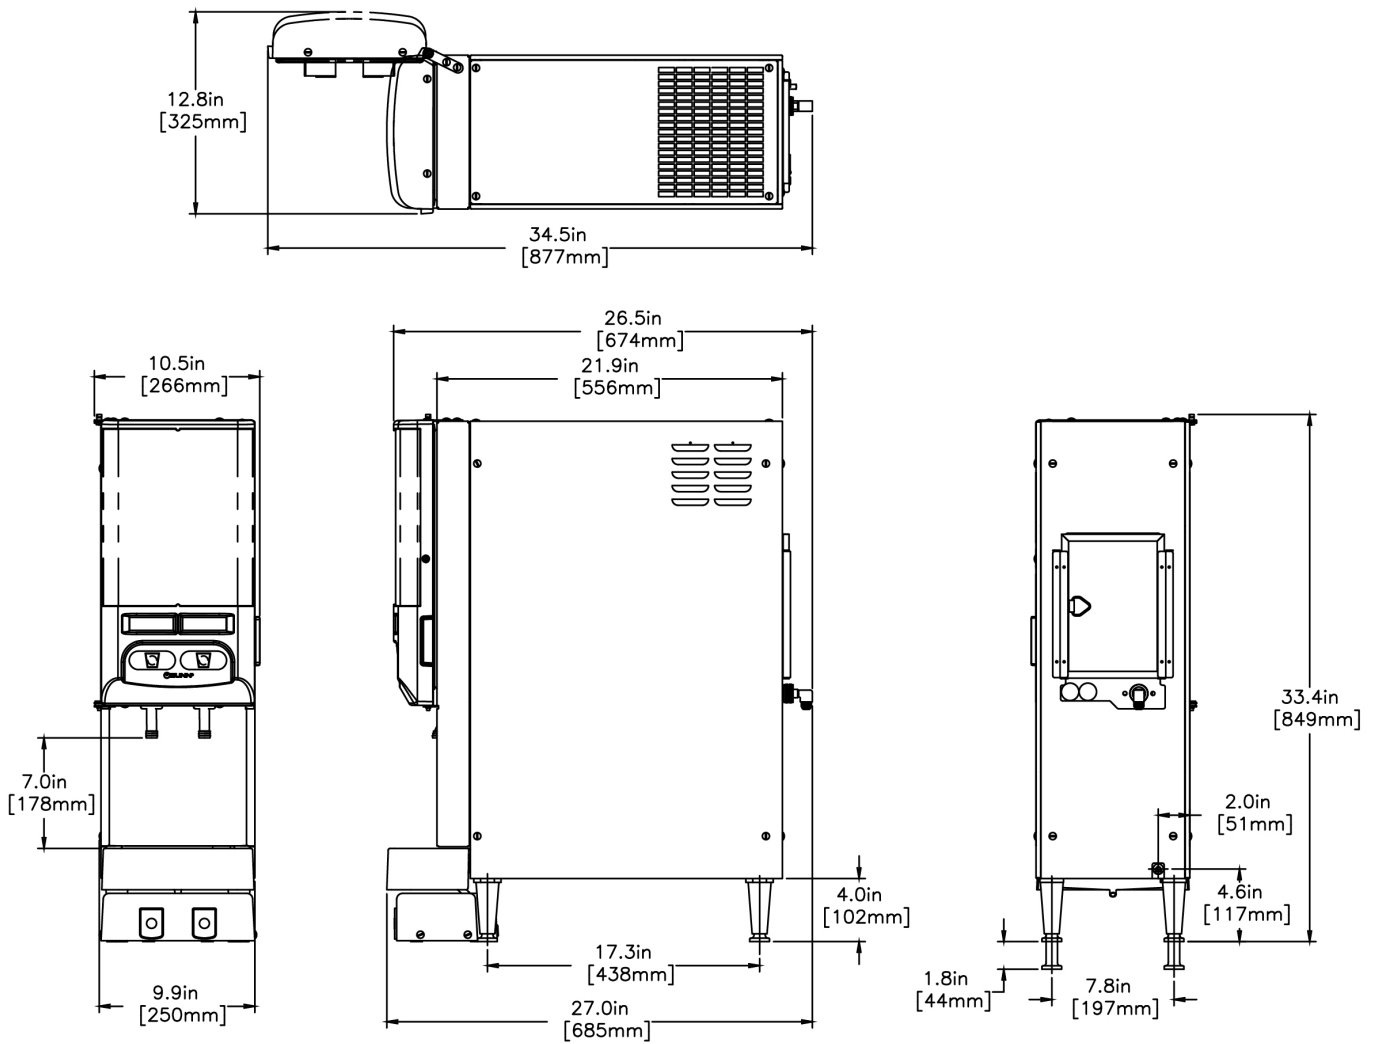

| Unit    |          |          |          | Shipping |          |          |             |            |
|---------|----------|----------|----------|----------|----------|----------|-------------|------------|
|         | Height   | Width    | Depth    | Height   | Width    | Depth    | Weight      | Volume     |
| English | 33.4 in. | 10.5 in. | 27.0 in. | 43.7 in. | 22.8 in. | 30.5 in. | 113.710 lbs | 17.543 ft³ |
| Metric  | 84.8 cm  | 26.7 cm  | 68.6 cm  | 111.0 cm | 57.8 cm  | 77.5 cm  | 51.579 kgs  | 0.497 m³   |



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit [bunn.com](http://bunn.com).

Last Updated:  
08/15/2024

Related Products & Accessories:JDF®-2S(37900.0001)

|                                                                                                                                                        |                                                                                                                                                         |                                                                                                                                                 |                                                                                                                                                       |                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>WIRE GRILL,DRIP TRAY<br/>(SINGLE)</p> <p>Product #: 26801.0000</p> |  <p>KIT, AMBIENT CONC<br/>CVRSN JDF-4</p> <p>Product #: 33699.0001</p> |  <p>WATER FILTER,<br/>EQHP-10</p> <p>Product #: 39000.0004</p> |  <p>CONTAINER ASSY,<br/>REFILLABLE</p> <p>Product #: 39302.0000</p> |  <p>KIT, HOSE ASSY-PUMP<br/>JDF-2S/4S</p> <p>Product #: 39690.0000</p> |
|  <p>TRAY ASSY, EXTENDED<br/>DRIP</p> <p>Product #: 44015.1000</p>      |  <p>SYSTEM, WQ-55(2)5</p> <p>Product #: 56000.0004</p>                 |  <p>SYSTEM, WEQ-10(1.5)5</p> <p>Product #: 56000.0027</p>      |  <p>CARTRIDGE, WQ-55(2)5</p> <p>Product #: 56000.0104</p>           |  <p>CARTRIDGE, WEQ-10<br/>(1.5)5</p> <p>Product #: 56000.0122</p>      |

## Serving & Holding Options: JDF®-2S(37900.0001)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit [bunn.com](https://www.bunn.com).

Last Updated:  
08/15/2024