

{14.01}



Security Units Super Erecta® & MetroMax®

Security Units Super Erecta® & MetroMax® provide **safe storage** and protects valuable materials and sensitive items from loss or pilferage.

Microban® Antimicrobial Product Protection*: Metroseal Green and MetroMax Q models feature Microban Antimicrobial Product Protection that helps fight the growth of stain and odor-causing bacteria to keep product cleaner between cleanings.

Ready View of Contents: Heavy-gauge open wire construction keeps the entire contents of the unit visible at all times, making it easy to check inventory.

Adjustable, Optional Intermediate Shelves: Patented, easily adjustable shelf designs — Super Erecta EZ-ADD, Super Adjustable Super Erecta, and MetroMax Q — allow flexibility to meet changing needs. Can be positioned in 1" (25 mm) increments along the entire height of post.

Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

Safe Transportation: Mobile, security trucks provide the advantage of quick, protective transportation.

Easy Cleaning of Storage Areas: Mobile units move easily from walls to allow thorough cleaning of floors and walls.

Mobile Units: Available in Standard and Heavy-Duty models Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.

Time Saving Assembly: Metro security units assemble quickly — right out of the box.

Shipped Knocked-Down: Saves on freight

Door Options

Hinged Doors: Each door opens 270 degrees and can be secured along the sides of the unit with a patented 1/4 turn door handle locking system that accommodates a pad lock.

Sliding Doors: Each door slides over each other to save aisle space and has a flip lock that accommodates a pad lock. Perfect for use in Top-Track & qwikTRAK applications.

Locking

Standard Pad lock: Not included



Super Erecta® Chrome
Mobile Security



MetroMax® Q
Stationary Security



Super Erecta
Sliding Door Security



Super Erecta
Heavy Duty Security
with a dolly base and optional
intermediate shelves.



NOTE: Super Erecta and MetroMax options are NSF Listed.

All Metro Catalog Sheets are available on our website: metro.com

Super Erecta® Security Units

Units DO NOT include intermediate shelves.
Intermediate shelves must be ordered separately.

Super Erecta Shelf Stationary Security

Hinge Style Doors

Cat. No. Chrome	Cat. No. Metroseal Green	Cat. No. Stainless Steel	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
			in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33C	SEC33K3	SEC33S	21½	546	38½	980	66 13/16	1695	18x36	457x914	140	64
SEC35C	SEC35K3	SEC35S	21½	546	50½	1295	66 13/16	1695	18x48	457x1219	159	72
SEC53C	SEC53K3	SEC53S	27¼	692	38½	980	66 13/16	1695	24x36	610x914	156	71
SEC55C	SEC55K3	SEC55S	27¼	692	50½	1295	66 13/16	1695	24x48	610x1219	176	80
SEC56C	SEC56K3	SEC56S	27¼	692	62½	1587	66 13/16	1695	24x60	610x1524	197	90
SEC63C	SEC63K3	SEC63S	33½	851	38½	980	66 13/16	1695	30x36	760x914	169	77
SEC65C	SEC65K3	SEC65S	33½	851	50½	1295	66 13/16	1695	30x48	760x1219	195	89
SEC66C	SEC66K3	SEC66S	33½	851	62½	1587	66 13/16	1695	30x60	760x1524	217	99

Sliding Doors

SEC55C-SL	SEC55K3-SL	SEC55S-SL	28½	724	50½	1295	66 13/16	1695	24x48	610x1219	176	80
SEC56C-SL	SEC56K3-SL	SEC56S-SL	28½	724	62½	1587	66 13/16	1695	24x60	610x1524	197	90

Super Erecta Shelf Mobile Security

Standard-Duty Stem Caster Models: feature 5" (127mm) swivel casters. Please note model numbers for specific caster types.

Hinge Style Doors

Cat. No. Chrome with (2) 5MP / (2) 5MPB casters	Cat. No. Metroseal Green with (2) 5MP / (2) 5MPB casters	Cat. No. Metroseal Green with (2) 5PC / (2) 5PCB Casters	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
			in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33EC	SEC33EK3	SEC33VK3	21½	546	40 3/4	1035	68 ½	1740	18x36	457x914	148	67
SEC35EC	SEC35EK3	SEC35VK3	21½	546	52 3/4	1340	68 ½	1740	18x48	457x1219	167	76
SEC53EC	SEC53EK3	SEC53VK3	27¼	692	40 3/4	1035	68 ½	1740	24x36	610x914	164	75
SEC55EC	SEC55EK3	SEC55VK3	27¼	692	52 3/4	1340	68 ½	1740	24x48	610x1219	184	84
SEC56EC	SEC56EK3	SEC56VK3	27¼	692	65	1651	68 ½	1740	24x60	610x1524	205	93
SEC63EC	-	-	33½	851	40 3/4	1035	68 ½	1740	30x36	760x914	177	81
SEC65EC	-	-	33½	851	52 3/4	1340	68 ½	1740	30x48	760x1219	204	93
SEC66EC	-	-	33½	851	65	1651	68 ½	1740	30x60	760x1524	225	102

Sliding Doors

SEC55EC-SL	SEC55EK3-SL	SEC55VK3-SL	28½	724	52 3/4	1340	68 ½	1740	24x48	610x1219	184	84
SEC56EC-SL	SEC56EK3-SL	SEC56VK3-SL	28½	724	65	1651	68 ½	1740	24x60	610x1524	205	93

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread.

5PC and 5PCB (with locking brake) casters feature a polymer horn and resist rusting. They are recommended for high-moisture environments.

Stainless Steel: Casters must be ordered separately on "-SD" models.

Hinge Style Doors

Cat. No.	Description	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33S-SD	Standard Duty	21½	546	40¾	1035	62	1575	18x36	457x914	140	64
SEC35S-SD	Standard Duty	21½	546	52¾	1340	62	1575	18x48	457x1219	159	72
SEC53S-SD	Standard Duty	27¼	692	40¾	1035	62	1575	24x36	610x914	156	71
SEC55S-SD	Standard Duty	27¼	692	52¾	1340	62	1575	24x48	610x1219	176	80
SEC56S-SD	Standard Duty	27¼	692	65	1651	62	1575	24x60	610x1524	197	90
SEC63S-SD	Standard Duty	33½	851	40¾	1035	62	1575	30x36	760x914	169	77
SEC65S-SD	Standard Duty	33½	851	52¾	1340	62	1575	30x48	760x1219	195	89
SEC66S-SD	Standard Duty	33½	851	65	1651	62	1575	30x60	760x1524	217	99

Sliding Doors

SEC55S-SD-SL	Standard Duty	28½	724	52¾	1340	62	1575	24x48	610x1219	176	80
SEC56S-SD-SL	Standard Duty	28½	724	65	1651	62	1575	24x60	610x1524	197	90

Heavy-Duty Models: feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

Cat. No. Chrome	Cat. No. Metroseal Green	Caster Type	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
			in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC53LC	SEC53LK3	(2) B5P/B5PB	28 1/16	713	38 ½	980	68 ½	1740	24x36	610x914	189	86
SEC55LC	SEC55LK3	(2) B5P/B5PB	28 1/16	713	50 ½	1285	68 ½	1740	24x48	610x1219	212	96
SEC56LC	SEC56LK3	(2) B5P/B5PB	28 1/16	713	63 1/8	1600	68 ½	1740	24x60	610x1524	237	108

NOTE: Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25mm).

CAUTION: Large casters can create a tipping hazard. On 18" (457mm) security units, do not use casters larger than 5" (127mm) in diameter.

MetroMax® Security Units

- Optional intermediate shelves: MetroMax Q quick adjust shelves or corrosion proof MetroMax i. Microban antimicrobial product protection is built into the shelf mats only.
- Standard Units consist of taupe epoxy coated top and bottom wire shelves, tri-lobal steel posts, wire enclosures, and doors. Casters and bumpers are included with mobile units. Intermediate shelves are sold separately.
- Grid openings: 13/4" x 13/4" (44 x 44mm).

Units DO NOT include intermediate shelves.
Intermediate shelves must be ordered separately.

MetroMax Stationary Units — 66 3/16" (1681mm) High

Actual Outside Dimensions (including handle)

Hinge Style Doors

Cat. No.	Width		Length		Fits Shelf		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	lbs.	kg
MQSEC53E	26 15/16	685	38 7/8	987	24 x 36	610 x 914	150	68
MQSEC55E	26 15/16	685	50 7/8	1292	24 x 48	610 x 1219	158	72
MQSEC56E	26 15/16	685	62 7/8	1597	24 x 60	610 x 1524	163	74

Sliding Doors

MQSEC55E-SL	26 15/16	685	50 7/8	1292	24 x 48	610 x 1219	158	72
MQSEC56E-SL	26 15/16	685	62 7/8	1597	24 x 60	610 x 1524	163	74

Note: Leveling foot on post can be adjusted up to 1" (25mm) to compensate for uneven floors.



MetroMax® Security with hinge doors.

MetroMax Stem Caster Mobile Units — 67 13/16" (1723mm) High

Actual Outside Dimensions (including bumpers and handle)

Hinge Style Doors

Cat. No. w/ 5" (127mm) diameter casters	Width		Length		Fits Shelf		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	lbs.	kg
MQSEC53VE	27 13/16	707	40 3/4	1035	24x36	610x914	168	76
MQSEC55VE	27 13/16	707	52 3/4	1340	24x48	610x1219	178	81
MQSEC56VE	27 13/16	707	64 3/4	1645	24x60	610x1524	181	82

Sliding Doors

MQSEC55VE-SL	27 13/16	707	52 3/4	1340	24x48	610x1219	178	81
MQSEC56VE-SL	27 13/16	707	64 3/4	1645	24x60	610x1524	181	82

Note: Caster units use two 5PCX and two PCSX casters.



MetroMax® Security with sliding doors

MetroMax Heavy-Duty Mobile Units — 68.5" (1740mm) High

Mounted on aluminum dolly with 5" (127mm) plate casters and wraparound bumpers.

Actual Outside Dimensions (including handle)

Cat. No.	Each	Width		Length		Fits Shelf		Approx. Pkd. Wt.	
		in.	mm	in.	mm	in.	mm	lbs.	kg
MQSEC53LE	2,104.50	28.06	713	39.13	994	24x36	610x914	166	75
MQSEC55LE	2,521.00	28.06	713	51.13	1299	24x48	610x1219	176	80
MQSEC56LE	2,712.50	28.06	713	63.13	1603	24x60	610x1524	179	81

Note: The aluminum dollies used on the LE models have two B5P and two B5PB plate casters.

Replacement Tri-Lobal Adapters for MetroMax Wire Security Shelves

Model No.
MTLA* - Four pair per bag

*Not compatible with MetroMax Q security units manufactured prior to May 2009. For older MetroMax Q security units, use MQ9985 wedges if replacements are needed for the wire shelves.



Intermediate Shelves for Security Units

Units DO NOT include intermediate shelves.
Intermediate shelves must be ordered separately.

Intermediate Shelves for Super Erecta Shelf Security Units

Chrome	Metroseal Green	Super Erecta Pro	Stainless Steel	EZ-ADD Chrome	EZ-ADD Metroseal Green	Super Adjustable Chrome	Super Adjustable Metroseal Green	Super Adjustable Stainless Steel	Width in.	Width mm	Length in.	Length mm
1836NC	1836NK3	PR1836NK3	1836NS	EZA-1836NC	EZA-1836NK3	A1836NC	A1836NK3	A1836NS	18	457	36	914
1848NC	1848NK3	PR1848NK3	1848NS	EZA-1848NC	EZA-1848NK3	A1848NC	A1848NK3	A1848NS	18	457	48	1219
2436NC	2436NK3	PR2436NK3	2436NS	EZA-2436NC	EZA-2436NK3	A2436NC	A2436NK3	A2436NS	24	610	36	914
2448NC	2448NK3	PR2448NK3	2448NS	EZA-2448NC	EZA-2448NK3	A2448NC	A2448NK3	A2448NS	24	610	48	1219
2460NC	2460NK3	PR2460NK3	2460NS	EZA-2460NC	EZA-2460NK3	A2460NC	A2460NK3	A2460NS	24	610	60	1524
3036NC	3036NK3	PR3036NK3	3036NS	-	-	-	-	-	30	760	36	914
3048NC	3048NK3	PR3048NK3	3048NS	-	-	-	-	-	30	760	48	1219

EZ-ADD Wire Shelves

- EZ-ADD Shelves can be added to any wire security unit without dismantling the unit. Shelves can be easily repositioned for your storage needs.




Intermediate Shelves for MetroMax Security Units

Shelf with Grid Mat Cat. No.	Shelf with Grid Mat Cat. No.	Shelf with Grid Mat Cat. No.	Width		Length	
			in.	mm	in.	mm
MX2436G	MAX4-2436G	MQ2436G	24	610	36	914
MX2448G	MAX4-2448G	MQ2448G	24	610	48	1219
MX2460G	MAX4-2460G	MQ2460G	24	610	60	1524

Sliding Door Retrofit Kits

- Easily convert a hinged door unit to a sliding door unit. Hardware included.
- Door kits recommended for 24" deep units only.
- Kit includes: sliding doors, set of polymer post brackets, top & bottom tracks, upper track cover, side panel clamps, and installation hardware. (Pad lock not included)

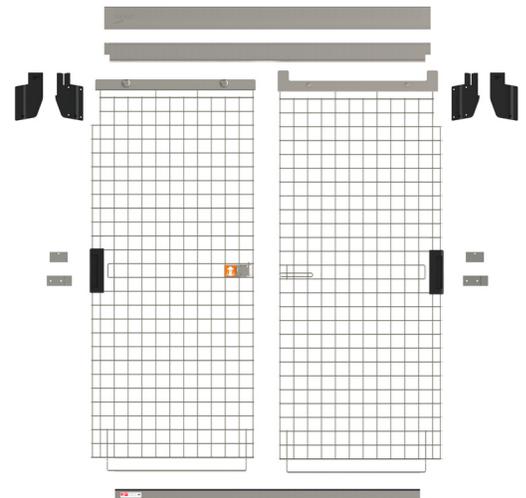

Super Erecta Sliding Door Retro Fit Kits

Cat. No.	Finish	Fits Units	Description
SEC55C-SLKIT	Chrome	48" long	SES-Sliding Door-Chrome-48 W Unit
SEC56C-SLKIT	Chrome	60" long	SES-Sliding Door-Chrome-60 W Unit
SEC55K3-SLKIT	Metroseal Green	48" long	SES-Sliding Door-Metroseal 3-48 W Unit
SEC56K3-SLKIT	Metroseal Green	60" long	SES-Sliding Door-Metroseal 3-60 W Unit
SEC55S-SLKIT	Stainless	48" long	SES-Sliding Door-Stainless-48 W Unit
SEC56S-SLKIT	Stainless	60" long	SES-Sliding Door-Stainless-60 W Unit

MetroMax Sliding Door Retro Fit Kits

Cat. No.	Finish	Fits Units	Description
MQSEC55-SLKIT	Taupe Epoxy	48" long unit	MAX-Sliding Door-MetroMaxQ-48 W Unit
MQSEC56-SLKIT	Taupe Epoxy	60" long unit	MAX-Sliding Door-MetroMaxQ-60 W Unit

Adding SlideSecure to Top-Track

STEP 1 Refer to the following spec sheets for track shelving components:

- Top-Track for Super Erecta **11.12**
- MetroMax Top-Track High Density Storage System **9.29**

STEP 2 Choose one kit for each security unit.

Super Erecta

Super Erecta SlideSecure Kit

Includes end panels, back panels, sliding doors, and the rail kit.

Cat. No. Chrome	Cat. No. Metroseal Green	Cat. No. Stainless Steel	Width		Length		Fits Shelf	
			in.	mm	in.	mm	in.	mm
SEC55-CTN1B-SL	SEC55K3-CTN1B-SL	SEC55S-CTN1B-SL	28½	724	50½	1295	24x48	610x1219
SEC56-CTN1B-SL	SEC56K3-CTN1B-SL	SEC56S-CTN1B-SL	28½	724	62½	1587	24x60	610x1524

STEP 3 Choose a minimum of 2 shelves for each security unit.

Super Erecta Security Shelves

Each security unit must include at least three shelves: one for the top and bottom of the assembly, and an additional shelf above the cage to ensure proper stability in the Top-Track system. Additional intermediate shelves can be added.

Cat. No. Chrome	Cat. No. Metroseal Green	Cat. No. Stainless Steel	Width		Length	
			in.	mm	in.	mm
2448NC	2448NK3	2448NS	24	610	48	1219
2460NC	2460NK3	2460NS	24	610	60	1524

OR

STEP 2 Choose one kit for each security unit.

MetroMax

MetroMax SlideSecure Kit

Includes end panels, back panels, sliding doors, and the rail kit.

Cat. No. MetroMax	Width		Length		Fits Shelf	
	in.	mm	in.	mm	in.	mm
MQSEC55-CTN1B-SL	26 ¹⁵ / ₁₆	685	50¾	1295	24x48	610x1219
MQSEC56-CTN1B-SL	26 ¹⁵ / ₁₆	685	62¾	1587	24x60	610x1524

STEP 3 Choose 2 shelves for each security unit.

MetroMax Security Shelves

These shelves are specific to the MetroMax security units and must be installed as the top and bottom assembly for proper mounting of the enclosure panels. An additional shelf must be ordered for above the cage to ensure proper stability in the Top-Track system. Intermediate shelves must be ordered separately.

Cat. No. MetroMax	Width		Length	
	in.	mm	in.	mm
RPMQSEC55-SHF	24	610	48	1219
RPMQSEC56-SHF	24	610	60	1524

STEP 4

Bumpers

Bumpers must be installed in top-track in the following scenarios:

- SlideSecure security end unit must use (1) upper track bumper set
- SlideSecure security mobile unit must use (1) bottom bumper set per mobile unit



SECSL-UPBMPRSET
Upper Track Bumper Set




SECSL-24BMPRSET
24" SS Bottom Bumper Set



Super Erecta® Security Module

Only for Standard 24" (610mm) Wide Super Erecta Shelf Wire Units.

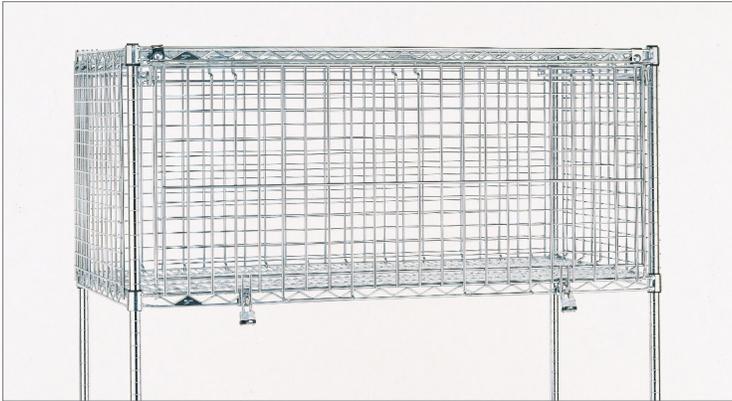

- Designed to convert a standard 24" (610 mm) wide unit into a combination of open and lockable shelving through the use of a kit.
- **Kit Includes:** Two end panels, one back panel and one door and slides. Fits between any two shelves spaced 20" (510 mm) apart on any Super Erecta Shelf Wire Unit with 24" (610 mm) wide shelves in 30", 48" and 60" (762, 1219 and 1524 mm) lengths.
- **Versatile:** Security Modules enclose only one section of the shelving unit, leaving the rest open for conventional use. Depending upon your needs, more than one Security Module can be used on the same shelving unit.
- **Ready View of Contents:** As with Metro's Security Trucks and Stationary Security Units, the heavy-gauge, open-wire construction of the Security Module keeps contents visible at all times, and makes inventory easy.
- **Convenient Door:** Has hasps for two padlocks and, when opened, slides under the upper shelf conveniently out of the way.
- **Choice of finishes:** Durable Chrome-Plated and Stainless Steel.

Note: Security Modules can be installed on 24" (610mm) wide Super Erecta Shelf wire shelves only. When multiple security modules are stacked on one shelving unit, separate top and bottom shelves are still necessary for each module.



Two Security Modules on Stationary Unit

Super Erecta Security Module Kits

Cat. No. Chrome	Cat. No. Stainless Steel	Length		Width		Height		Approx. Pkd. Wt.	
		in.	mm	in.	mm	in.	mm	lbs.	kg
SECM2430NC	SECM2430NS	30	760	24	610	20	510	29.5	14
SECM2448NC	—	48	1219	24	610	20	510	39.75	18
SECM2460NC	—	60	1524	24	610	20	510	45.75	21



{14.01}



Security Units Super Erecta® & MetroMax®

Utility Cart Secure Storage

Corrosion Proof Model in Stainless Steel

- Corrosion Proof: Features stainless steel wire and solid shelves, security module, and posts.
- Easy to Maneuver: Includes two 5MP swivel casters and two 5MPB swivel/brake casters.
- Solid top shelf with raised ship's edge is ideal for use as a work surface and can contain unwanted spills
- Easy assembly in minutes.



Super Erecta Security Module Kits

Cat. No.	Width		Length		Height		Load Rating		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	lbs.	kg	lbs.	kg
SECMLAB	24	610	30	760	39	990	600	273	85	38.6

Other finishes and configurations are available:

Similar units can be constructed using chrome-plated components and galvanized solid Super Erecta shelves. Refer to the security modules on the previous page, and pair them with Metro SP series wire carts or your own combination of SES posts and shelves, for a customized solution. Security modules must be placed between two wire shelves.



Technical Information and Recommended Usage Guidelines for Security Units

Shelves:

- Solid shelves cannot be used as the top or bottom shelf on a security unit. For those applications requiring a solid bottom surface, Super Erecta Shelf inlays are recommended.
- It is recommended that standard Super Erecta shelves are used for the top and bottom shelves on a Super Erecta security unit.

Security Enclosure Panels:

- Grid spacing measures 13/4" x 13/4" (44 x 44mm).
- The distance from the top of the top shelf to the top of the bottom shelf measures approximately 57" (1448mm).

Mobile Units:

- 18" (457mm) deep security units must be used with casters that have a diameter of 5" (127mm) or less.
- Order aluminum split sleeves with c-rings for use with the top and bottom SES shelves of a mobile unit for applications that require a more rigid assembly. (9986Z for aluminum sleeves with zinc c-rings; 9986S for aluminum sleeves with stainless c-rings)

Use with other Metro components:

- Tray slides (15SNC, 20SNC) measure approximately 23" (584mm) in height. A standard security unit can accommodate 2 levels of these tray slides.

- Metro's brake/lock plate caster system can be used with 24" (610mm) deep security mobile units featuring a dolly base.
- Solid SES shelves can be used as interior shelves on a security unit. Wire shelves must be used as the top and bottom shelves.
- A push handle is available through Custom Engineering for the 24" (610mm) deep SES security units (subject to custom order minimums). Handle is available in chrome finish (Part # CC2835N).