



CONTROL CENTER MODEL CC-202

AUTOMATIC REVERSING ACTION • DOUBLES THE LIFE OF DISPOSER GRINDING ELEMENTS

SPECIFICATIONS

STAINLESS STEEL ENCLOSURE

- NEMA 4
- Stainless steel construction
- Easy to clean and keep clean

AUTOMATIC REVERSING CONTROL

- Reverses direction of motor at each startup
- Increases cutting element life and reduces jams

REVERSING DELAY

- Disposer will not reverse while motor is in motion
- Protects motor from burn out from operator misuse

AUTOMATIC DROP OUT SYSTEM


- If a power loss occurs, control will automatically disengage power lines
- Disposer must be restarted



VOLTAGE/PHASE AVAILABILITY


Model	Voltage/Hz	Phase	Disposer Models
CC202D-5	120V, 50/60 Hz	1 Ph	SS-100 to SS-200
CC202D-6	208-240V, 50/60 Hz	1 Ph	SS-100 to SS-200
CC202D-7	208-240V, 50/60 Hz	3 Ph	SS-100 to SS-1000
CC202D-8	380-460V, 50/60 Hz	3 Ph	SS-100 to SS-1000

RECOMMENDED INSTALLATION

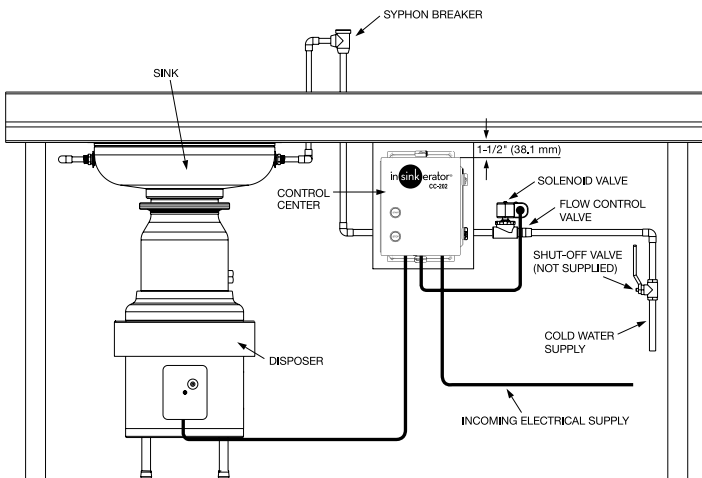

NOTE: The CC-202 control center should be mounted 1-1/2" (38.1 mm) back from the front surface of the table.

DIMENSIONS

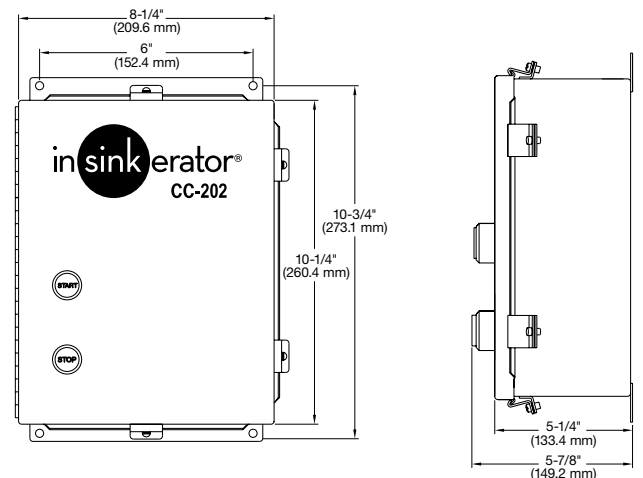

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD Library**, which can be found at www.insinkerator.com/foodservice. Product information is also accessible on **The KCL CADalog**. More information is available from KCL at www.kclcad.com.



1250 International Drive
Mount Pleasant, WI 53177
TEL: 800-845-8345

www.insinkerator.com/foodservice

