




WHAT'S INCLUDED

- Base disposer: 1 mounting gasket
- Disposer packages: 1 mounting/bowl assembly, 1 electrical control, 1 syphon breaker, 1 solenoid valve, and 1 flow control valve (the standard flow control valve will be sent with the unit unless the optional valve is specified)

MODEL & HORSEPOWER/ELECTRICAL REQUIREMENTS (CHOOSE ONE)

Small Capacity Disposers		
	☐ SS-100 1 HP	☐ 115/208-230V, 60 Hz, 1 Ph, 11.6/5.1/5.7 amps, cULus ☐ 208-230/460V, 60 Hz, 3 Ph, 2.0/2.4/1.2 amps, cULus ☐ 120/208-240V, 60 Hz, 1 Ph, 11.6/5.1/5.7 amps, NOM ☐ 100/200-230V, 50/60 Hz, 1 Ph, 10.4/5.2/5.4 amps
	Water Usage:	☐ 5 GPM (18.9 LPM) standard water flow ☐ 3 GPM (11.4 LPM) reduced water flow (optional)
Medium Capacity Disposer		
	☐ SS-200 2 HP	☐ 115/208-230V, 60 Hz, 1 Ph, 17.4/7.7/8.7 amps, cULus ☐ 208-230/460V, 60 Hz, 3 Ph, 3.6/4.4/2.2 amps, cULus ☐ 115/208-230V, 60 Hz, 1 Ph, 17.4/7.7/8.7 amps, cULus, short body ☐ 208-230/460V, 60 Hz, 3 Ph, 3.6/4.4/2.2 amps, cULus, short body ☐ 208-240/460V, 60 Hz, 3 Ph, 3 Ph, 3.6/4.4/2.2 amps, NOM ☐ 380V, 50/60 Hz, 3 Ph, 2.3 amps
	Water Usage:	☐ 7 GPM (26.5 LPM) standard water flow ☐ 5 GPM (18.9 LPM) reduced water flow (optional)
Large Capacity Disposers		
	☐ SS-300 3 HP	☐ 208-230/460V, 60 Hz, 3 Ph, 6.0/7.4/3.7 amps, CUL ☐ 208-230/460V, 60 Hz, 3 Ph, 6.0/7.4/3.7 amps, CUL, short body ☐ 208-230/460V, 60 Hz, 3 Ph, 7.0/8.6/3.7 amps, NOM ☐ 415V, 50 Hz, 3 Ph, 4.9 amps ☐ 220V, 50 Hz, 3 Ph, 7.2 amps ☐ 380V, 50/60 Hz, 3 Ph, 4.1 amps
	Water Usage:	☐ 8 GPM (30.3 LPM) standard water flow ☐ 7 GPM (26.5 LPM) reduced water flow (optional)
	☐ SS-500 5 HP	☐ 208-230/460V, 60 Hz, 3 Ph, 8.6/8.8/4.4 amps, CUL ☐ 208-230/460V, 60 Hz, 3 Ph, 8.6/8.8/4.4 amps, CUL, short body ☐ 230/460V, 50 Hz, 3 Ph, 9.0/4.5 amps ☐ 415V, 50 Hz, 3 Ph, 6.0 amps ☐ 380V, 50 Hz, 3 Ph, 8.9 amps
	Water Usage:	☐ 8 GPM (30.3 LPM) standard water flow ☐ 7 GPM (26.5 LPM) reduced water flow (optional)
	☐ SS-1000 10 HP	☐ 208-230/460V, 60 Hz, 3 Ph, 11.0/13.0/6.5 amps, CUL ☐ 208-230/460V, 60 Hz, 3 Ph, 11.0/13.0/6.5 amps, CUL, short body
	Water Usage:	☐ 10 GPM (37.9 LPM) standard water flow

DISPOSER MOUNTING ASSEMBLIES (CHOOSE ONE)


Sink Collar Mounts		Sink Bowl Mounts	
	☐ #5 Sink Flange Kit for 3-1/2"–4" (88.9 mm–101.6 mm) sink opening (support legs are recommended) <i>#5 adaptors only available on small and medium capacity disposers.</i>	Bowl Size	Kit Type
	☐ #6 Collar Adaptor Kit for welding into trough, for 6-5/8" (168.3 mm) opening, includes splash baffle	☐ 12" (304.8 mm) with one adjustable water nozzle	 ☐ Type A Sink Bowl Assembly • bowl • water nozzle(s) • bowl cover • splash baffle
	☐ #7 Collar Adaptor Kit for welding into sink, for 6-5/8" (168.3 mm) opening, includes splash baffle and stopper	☐ 15" (381.0 mm) with one adjustable water nozzle	 ☐ Type B Sink Bowl Assembly • bowl • water nozzle(s) • silver guard • splash baffle
		☐ 18" (457.2 mm) with two adjustable water nozzles	

ELECTRICAL CONTROLS (CHOOSE ONE)

☐ AS-101 Control Center AquaSaver®	☐ CC-101 Control Center	☐ CC-202 Control Center	☐ Manual Reverse Switch	☐ Manual Switch
				
- Automatically changes direction - Stainless-steel housing - Automatic shut-off with power loss - Line disconnect - Programmable post-flush - Timed run - Automatically regulates water flow to grind load	- Automatically changes direction - Stainless-steel housing - Automatic shut-off with power loss - Line disconnect - Programmable post-flush - Timed run	- Automatically changes direction - Stainless-steel housing - Automatic shut-off with power loss	- Manually changes direction - Stainless-steel housing - Automatic shut-off with power loss	- Single direction - Polycarbonate housing - Automatic shut-off with power loss

DISPOSER DIMENSIONS


Standard models shown. A short body model is available on medium and large capacity disposers. Short body models reduce overall height by 1" (25.4 mm) on medium capacity disposers and by 3" (76.2 mm) on large capacity disposers.

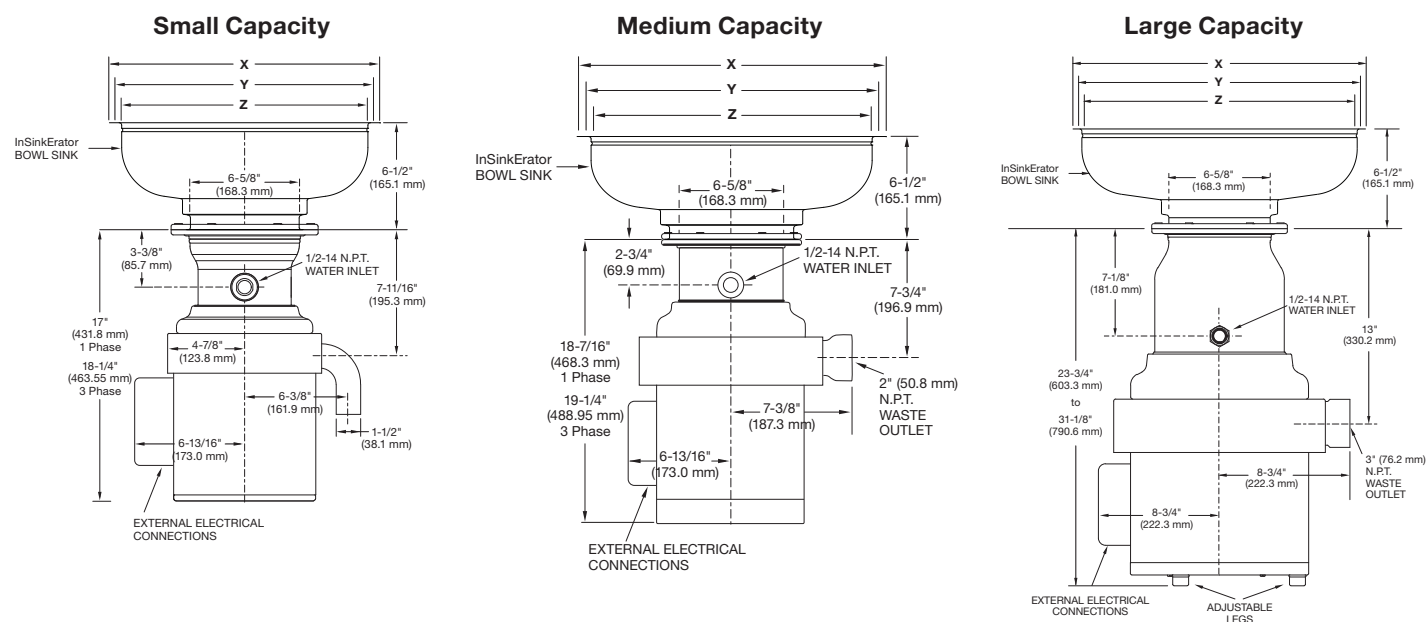

If mounting directly to a sink, use dimension chart below for adaptor height in place of InSinkErator bowl sink height.
IMPORTANT: #5 adaptors only available on small and medium capacity disposers.

Bowl Mounts	Flange O.D. X	Work Table Hole Y	Flange I.D. Z	Height
12" (304.8 mm)	13-1/2" (342.9 mm)	12-1/4" (311.2 mm)	12" (304.8 mm)	6-1/2" (165.1 mm)
15" (381 mm)	16-1/2" (419.1 mm)	15-1/4" (387.4 mm)	15" (381.0 mm)	6-1/2" (165.1 mm)
18" (457.2 mm)	19-1/2" (495.3 mm)	18-1/4" (463.6 mm)	18" (457.2 mm)	6-1/2" (165.1 mm)
Collar Mounts	X	Y	Z	Height
#5	Fits Standard Sink Opening: 3-1/2" – 4" (88.9 mm – 101.6 mm)			2-3/4" (69.9 mm)
#6	7-13/16" (198.4 mm)	6-7/8" (174.6 mm)	6-5/8" (168.3 mm)	1-3/16" (30.2 mm)
#7	9-1/8" (231.8 mm)	7-7/8" (200.0 mm)	7-5/8" (193.7 mm)	2-1/16" (52.4 mm)

TYPICAL INSTALLATION - BOWL

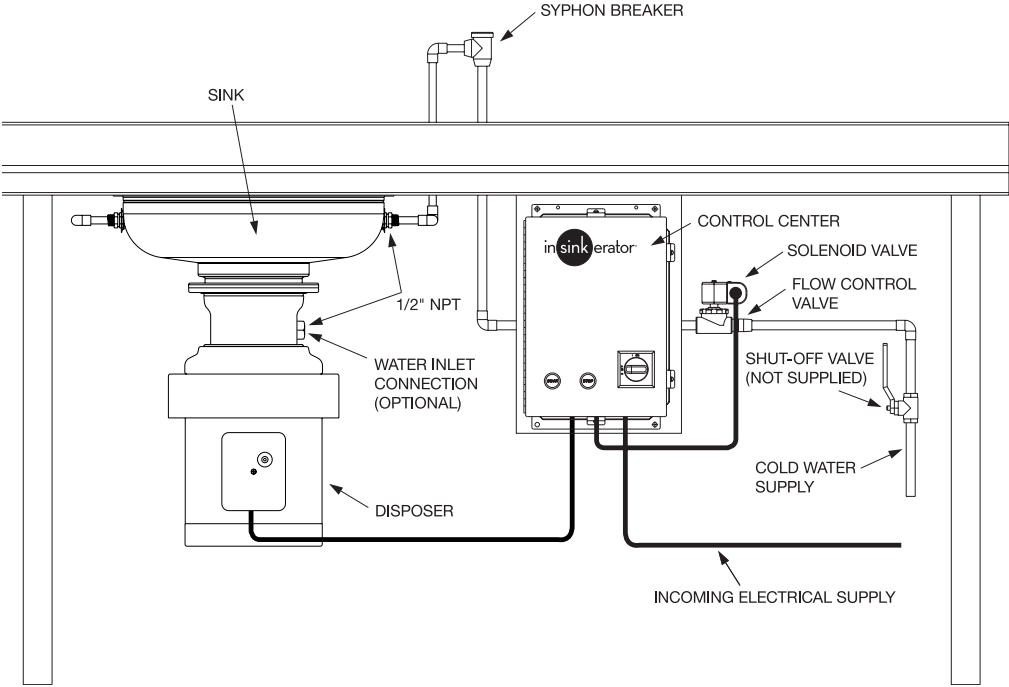

REPLACING A COMPETITIVE DISPOSER

- Refer to the Mounting Adaptor Guide or Video for adaptors that fit competitor sink bowls or cones.
- Have sink bowl/cone type with appropriate dimensions available when contacting Customer Service with questions or to place an order.

SAMPLE SPECIFICATION

InSinkErator Food Waste Disposer. Food waste grinding system with _____ HP disposer, _____ control panel. _____ Volts, _____ Hz, _____ Phase operation. _____ disposer mount. Syphon breaker with 1/2" NPT connections; flow control valve; (1) 24V water solenoid.

PROJECT INFORMATION

Item Number: _____	Model Number: _____
Quantity: _____	Electrical Requirements: _____
Manufacturer: InSinkErator	_____ volts _____ phase
Project: _____	Dealer: _____
Address: _____	City/State/Zip: _____
City/State/Zip: _____	Contact: _____
Contact: _____	Phone: _____
Phone: _____	
Installer: _____	Consultant: _____
Contact: _____	Contact: _____
Phone: _____	Phone: _____