

406P Self-Contained Compact Undercounter Refrigerator

400P Series: 406P Self-Contained Compact Undercounter Refrigerator

Models

- 406P-STAR2 - 115V Undercounter refrigerator single section on casters



406P-STAR2

Standard Features

- Features Delfield's exclusive ABS interior. ABS is extremely durable - It won't dent, chip or corrode and is backed by a limited lifetime warranty
- Stainless steel front, sides and top
- Two epoxy coated wire shelves, standard installed per unit
- Environmentally friendly R290 refrigerant
- Foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane cuts energy costs
- Black recessed quick grip handle
- 6' cord and plug supplied
- Door is field reversible with pre-drilled and plugged hinge-bolt locations. Standard hinging provided is on the right side
- Three year parts and labor warranty and an additional four year compressor parts warranty

Options & Accessories

- 5" (13cm) diameter casters (shipped loose)
- Model 409 Stacking collar (adds 4" to overall combined height for use with 406P/407P models)

Specifications

Exterior bottom shall be heavy-gauge galvanized metal. Exterior ends shall be heavy-gauge stainless steel. Exterior top shall be one-piece, heavy-gauge stainless steel with front edge turned down to form nosing and rear edge turned down.

Base interior shall be one-piece thermoformed ABS plastic material, with integral shelf supports. ABS interior is backed by a limited lifetime warranty. Base shall be fully insulated with high-density foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

Door shall have a heavy-gauge stainless steel exterior, with a thermoformed ABS plastic interior liner, and shall be fully insulated with foamed-in-place polyurethane. Door handle shall be black, recessed ABS. Cabinet shall have (2) adjustable epoxy-coated wire shelves installed.


Refrigeration system shall use R290 refrigerant. Compressor shall be 1/5 h.p., with condenser coil and hot gas condensate evaporator mounted on rear of cabinet. Evaporator coil and temperature control shall be mounted on the interior rear wall of the cabinet. Refrigerant flow shall be controlled by a capillary tube. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) interior cabinet temperature.

Electrical connections shall be 115 volt, 60 Hertz, single phase. Unit shall have a 6' (1.8m) long electrical cord and NEMA 5-15P plug. Cord and plug shall be located on rear of cabinet, 16" (40.6cm) above floor, 5" from the left side.

Equipment is shipped with 2" (5cm) diameter casters installed.



R290

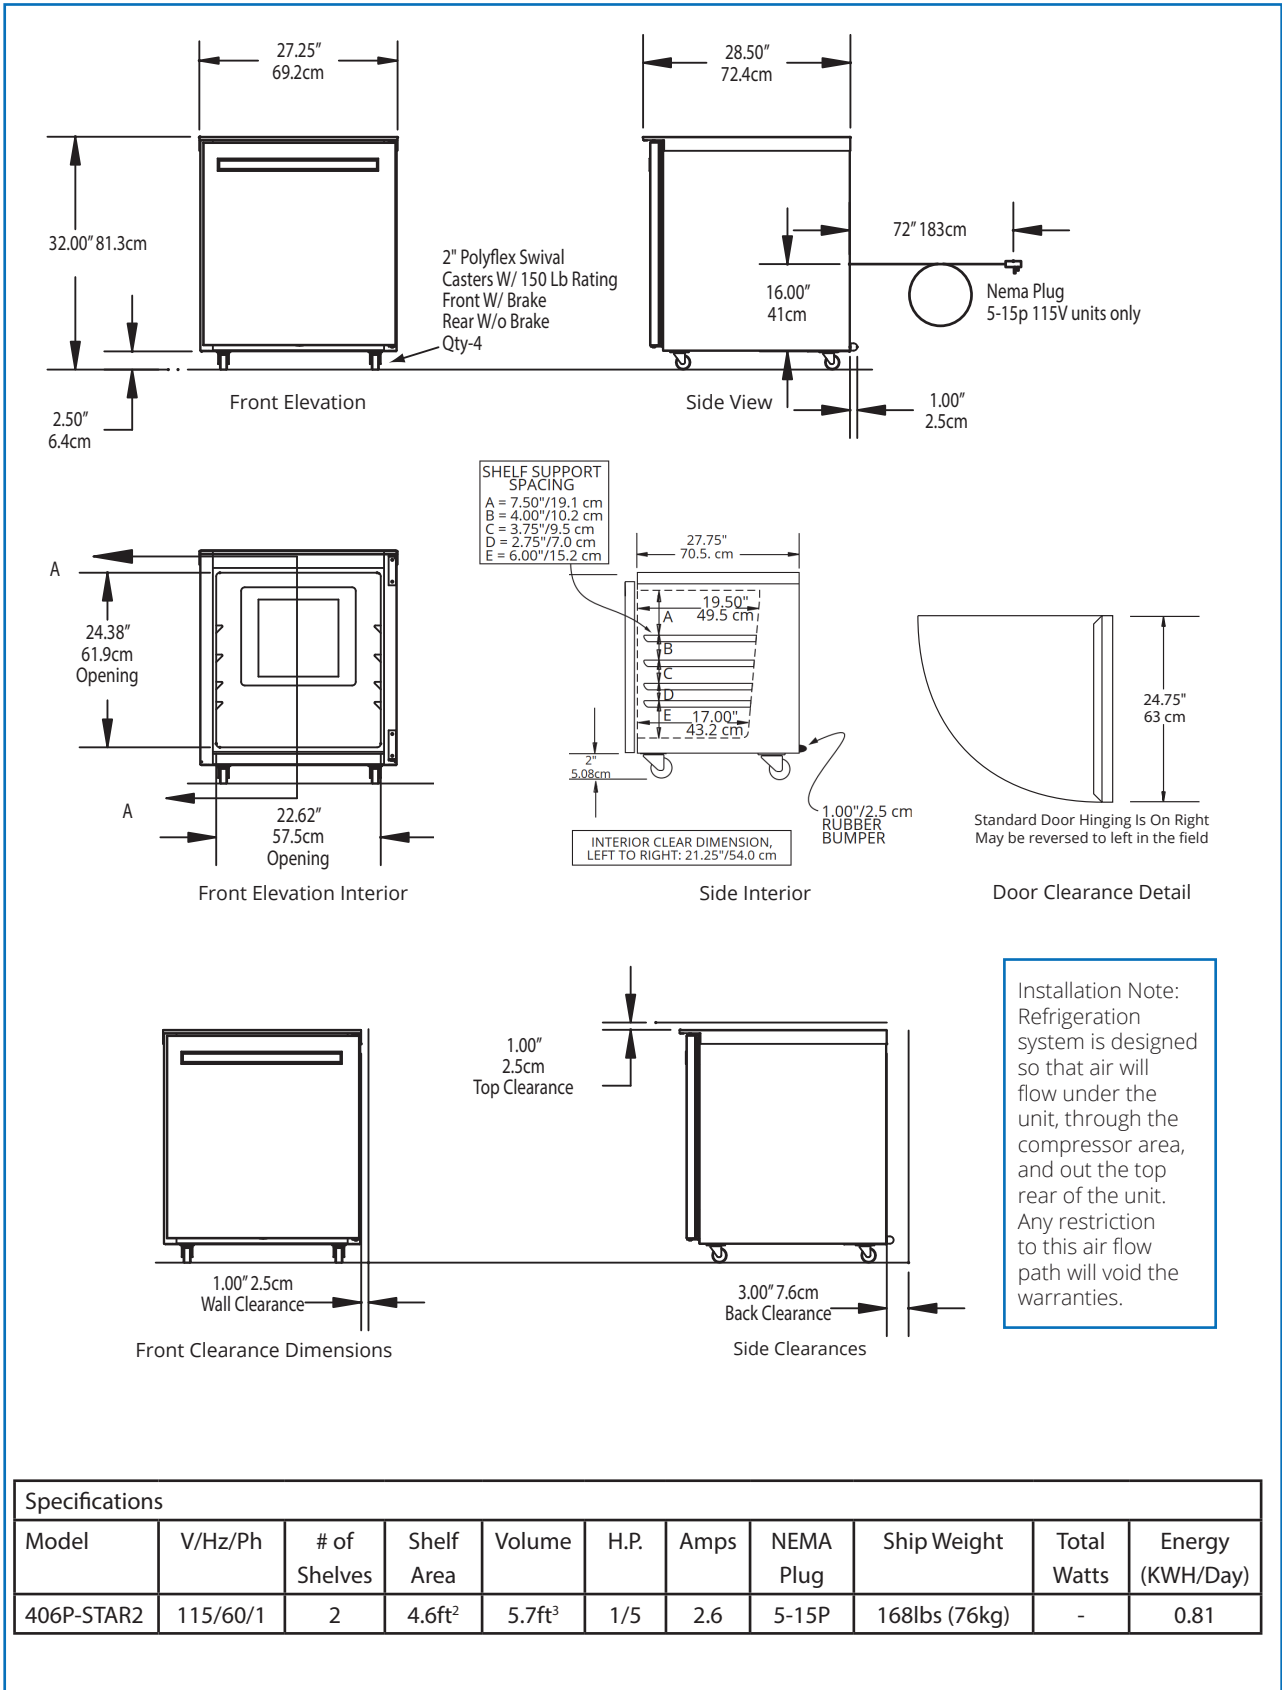

Welbilt reserves the right to make changes to the design or specifications without prior notice.