



Glo-Ray® Buffet Warmers

Models: GRBW-24, -30, -36, -42, -48, -54, -60, -66, -72

Glo-Ray® Buffet Warmers are ideal for holding hot food on buffet lines or at temporary serving areas. Seven optional *Designer* powdercoated colors coordinate these warmers with the décor while providing a durable, easy-to-clean surface.

A metal sheathed element directs heat from above while the thermostatically-controlled heated base conducts heat below.

Standard features

- Pre-focused infrared top heat directs heat to the outer edges of the holding surface where heat loss is the greatest
- Thermostatically-controlled heated base has a temperature range of 80° to 200°F (27°-93°C)
- Widths available from 25" - 78.25" (635-1988 mm)
- Features a 6' (1829 mm) cord and plug set
- Shatter-resistant incandescent lights enhance product display while safeguarding food products from bulb breakage
- Sturdy plexi-glass sneeze guards provide a safe environment

Project _____

Item # _____

Quantity _____



GRBW-30 with optional
*Designer Color and
accessory food pans*



GRBW-30 with optional
front and side enclosures



Options (available at time of purchase only)

Designer Color – Anodized Aluminum finish Standard – Non-standard colors are non-returnable ■

- | | | | |
|------------------------------------|---------------------------------------|---|--|
| ☐ Warm Red | ☐ Black | ☐ Gray Granite | ☐ White Granite |
| ☐ Navy Blue | ☐ Hunter Green | ☐ Antique Copper | |

Acrylic Front Enclosure

- | | |
|--|---|
| ☐ GRBW-24 and -30 | ☐ GRBW-36, -42 and -48 |
|--|---|

☐ Two Plexi-Glass Side Enclosures

Hardcoated Surface

- | | |
|--|--|
| ☐ GRBW-24 through GRBW-42 | ☐ GRBW-48 through GRBW-72 |
|--|--|

☐ Infinite Control for top heat only (GRBW-24 through GRBW-60 only)

Sneeze Guard in lieu of standard 7.5" (191 mm)

- | | |
|--|---------------------------------------|
| ☐ 9.375" (238 mm) | ☐ 14" (356 mm) |
|--|---------------------------------------|

Accessories

☐ 4" (102 mm) adjustable legs (standard on units GRBW-42 or wider)

Pan Rail (cannot use with Acrylic Front Enclosure)

- | | | | |
|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| ☐ 2 Rail | ☐ 3 Rail | ☐ 4 Rail | ☐ 5 Rail |
|---------------------------------|---------------------------------|---------------------------------|---------------------------------|

Trivets - stainless steel

- | |
|--|
| ☐ Half-size 10.2"W x 7.6"D x" (259 x 194 mm) |
| ☐ Full-size 10.125"W x 18"D x" (257 x 457 mm) |

Stainless steel food holding pans

- | |
|--|
| ☐ Third-size 12.75"W x 6.9" D x 2.5"H (324 x 175 x 64 mm) |
| ☐ Half-size 12.75"W x 10.4"D x 2.5"H (324 x 264 x 64 mm) |
| ☐ Full-size 12.75"W x 20.75"D x 2.5"H (324 x 527 x 64 mm) |
| ☐ Full-size 12.75"W x 20.75"D x 4"H (324 x 527 x 102 mm) |

Chef LED adjustable bulb - bulb must be rotated down

- | | |
|--|--|
| 120V: ☐ 3000K Similar to warm halogen | ☐ 4000K Similar to cool fluorescent |
| 230V: ☐ 3000K Similar to warm halogen | ☐ 4000K Similar to cool fluorescent |

■ IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.

For operation, location and safety information, please refer to the Installation and Operating Manual.



MADE IN
THE USA

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350




www.hatcocorp.com | support@hatcocorp.com | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)



Glo-Ray® Buffet Warmers

Models: GRBW-24, -30, -36, -42, -48, -54, -60, -66, -72

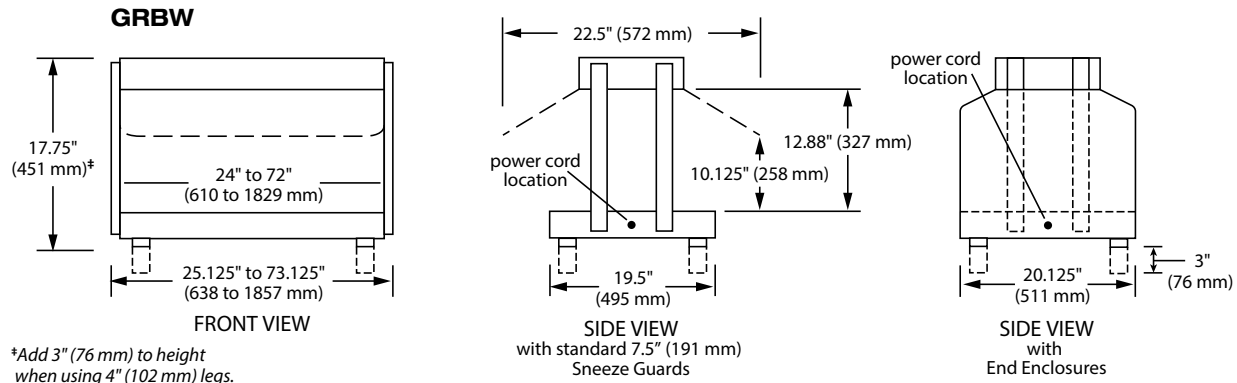

SPECIFICATIONS

Glo-Ray® Buffet Warmers

The shaded areas contain electrical information for International models

Model	Number of Light Bulbs	Dimensions↔ W x D x H (height includes legs)	Maximum Full Size Pan Capacity 12.75" x 20.75" pan (324 x 527 mm pan)	Volts	Watts	Amps	Plug Configuration	Approx. Ship Weight
GRBW-24	2	25" x 22.5" x 17.75" (635 x 572 x 451 mm) Legs: 1" (25 mm)	1	100	934	9.3	NEMA 5-15P	46 lbs. (21 kg.)
				120	970	8.1	NEMA 5-15P	
				120/208		4.2	NEMA L14-20P	
				120/240			NEMA L14-20P	
				220	920	4.2	CEE 7/7 Schuko	
				240	1000	4.2	BS-1363	
				220-230 (CE)	920-1006	4.2-4.4	CEE 7/7 Schuko	
				230-240 (CE)	918-1000	4.0-4.2	BS-1363	
GRBW-30	2	31" x 22.5" x 17.75" (787 x 572 x 451 mm) Legs: 1" (25 mm)	2	100	1194	11.9	NEMA 5-15P	52 lbs. (24 kg.)
				120	1230	10.3	NEMA 5-15P	
				120/208		5.5	NEMA L14-20P	
				120/240		5.5	NEMA L14-20P	
				220	1172	5.3	CEE 7/7 Schuko	
				240	1270	5.3	BS-1363	
				220-230 (CE)	1172-1281	5.3-5.6	CEE 7/7 Schuko	
				230-240 (CE)	1166-1270	5.1-5.3	BS-1363	
GRBW-36	3	37" x 22.5" x 17.75" (940 x 572 x 451 mm) Legs: 1" (25 mm)	2	100	1476	14.8	NEMA 5-15P	58 lbs. (26 kg.)
				120	1530	12.8	NEMA 5-15P †	
				120/208		6.7	NEMA L14-20P	
				120/240		6.7	NEMA L14-20P	
				220	1454	6.6	CEE 7/7 Schuko	
				240	1578	6.6	BS-1363	
				220-230 (CE)	1454-1589	6.6-6.9	CEE 7/7 Schuko	
				230-240 (CE)	1449-1578	6.3-6.6	BS-1363	
GRBW-42*	3	43" x 22.5" x 20.75" (1092 x 572 x 527 mm) Legs: 4" (102 mm)	3	120	1730	14.4	NEMA 5-15P †	68 lbs. (31 kg.)
				120/208		7.9	NEMA L14-20P	
				120/240		7.9	NEMA L14-20P	
				220	1648	7.5	CEE 7/7 Schuko	
				240	1782	7.4	BS-1363	
				220-230 (CE)	1648-1801	7.4-7.8	CEE 7/7 Schuko	
				230-240 (CE)	1636-1782	7.1-7.4	BS-1363	

↔ If end enclosures are included, add 1" (27 mm) to width of unit.

† NEMA 5-20P for Canada.

♦ NSF requires units over 36" (914 mm) in width and over or weighing more than 80 lbs. (36 kg) be either sealed to, or raised on the installation surface with 4" (102 mm) legs (included).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)



Glo-Ray® Buffet Warmers

Models: GRBW-24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS Glo-Ray® Buffet Warmers

The shaded areas contain electrical
information for International models

Model	Number of Bulbs	Dimensions↔ W x D x H (height includes legs)	Maximum Full Size Pan Capacity 12.75" x 20.75" pan (324 x 527 mm pan)	Volts	Watts	Amps	Plug Configuration	Approx. Ship Weight
GRBW-48♦	4	49" x 22.5" x 20.75" (1245 x 572 x 527 mm) Legs: 4" (102 mm)	3	120	2040	17.0	NEMA 5-20P ♦	75 lbs. (34 kg.)
				120/208		9.2	NEMA L14-20P	
				120/240		9.2	NEMA L14-20P	
				220	1940	8.8	CEE 7/7 Schuko	
				240	2040	8.5	BS-1363	
				220-230 (CE)	1940-2120	8.8-9.2	CEE 7/7 Schuko	
GRBW-54♦	4	55" x 22.5" x 20.75" (1397 x 572 x 527 mm) Legs: 4" (102 mm)	4	230-240 (CE)	1875-2040	8.1-8.5	BS-1363	81 lbs. (37 kg.)
				120/208	2290	10.4	NEMA L14-20P	
				120/240			NEMA L14-20P	
				220	2182	9.9	CEE 7/7 Schuko	
				240	2360	9.8	BS-1363	
				220-230 (CE)	2182-2385	9.9-10.4	CEE 7/7 Schuko	
GRBW-60♦	5	61" x 22.5" x 20.75" (1549 x 572 x 527 mm) Legs: 4" (102 mm)	4	230-240 (CE)	2167-2360	9.4-9.8	BS-1363	90 lbs. (41 kg.)
				120/208	2600	11.7	NEMA L14-20P	
				120/240			NEMA L14-20P	
				220	2474	11.2	CEE 7/7 Schuko	
				240	2680	11.2	BS-1363	
				220-230 (CE)	2474-2704	11.2-11.8	CEE 7/7 Schuko	
GRBW-66♦	5	67" x 22.5" x 20.75" (1702 x 572 x 527 mm) Legs: 4" (102 mm)	5	230-240 (CE)	2470-2680	10.7-11.2	BS-1363	96 lbs. (44 kg.)
				120/208	2860	13.0	NEMA L14-20P	
				120/240			NEMA L14-20P	
				220	2726	12.4	CEE 7/7 Schuko	
				240	2948	12.3	BS-1363	
				220-230 (CE)	2726-2978	12.4-12.9	CEE 7/7 Schuko	
GRBW-72♦	5	73" x 22.5" x 20.75" (1854 x 572 x 527 mm) Legs: 4" (102 mm)	5	230-240 (CE)	2707-2948	11.8-12.3	BS-1363	107 lbs. (49 kg.)
				120/208	3125	14.4	NEMA L14-20P	
				120/240			NEMA L14-20P	
				220	2983	13.6	CEE 7/7 Schuko	
				240	3113	13.0	BS-1363	
				220-230 (CE)	2983-3260	13.6-14.2	CEE 7/7 Schuko	
GRBW-72♦	5	73" x 22.5" x 20.75" (1854 x 572 x 527 mm) Legs: 4" (102 mm)	5	230-240 (CE)	2859-3113	12.4-13.0	BS-1363	107 lbs. (49 kg.)
				230-240 (CE)	2859-3113	12.4-13.0	BS-1363	

↔ If end enclosures are included, add 1" (27 mm) to width of unit.

♦ NSF requires units 36" (914 mm) in width and over or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with 4" (102 mm) legs included.

♦ Not available in Canada.


CORD LOCATION

Base end plate, same side as switch.

PLUG CONFIGURATIONS

Please refer to electrical specification chart.

NEMA 5-15P




NEMA 5-20P




NEMA L14-20P



CEE 7-7 Schuko



BS-1363



PRODUCT SPECS

Glo-Ray® Buffet Warmers

The infrared Buffet Warmer shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The warmer shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically- controlled heated base, breath protector(s), and incandescent display lights.

The infrared heating element shall be tubular metal sheathed and the warmer shall

have a cord with plug attached. Options shall include: Designer Color in anti-microbial paint, Acrylic Front Enclosure, Hardcoated Surface, Infinite Control and Sneeze Guards.

Accessories shall include pan rail, 4" (102 mm) adjustable legs, stainless steel food pans, wire rivets, food pans and Chef LED bulbs.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)