

Scotsman





The ICELINQ® app simplifies interaction with machine via Bluetooth® connection



Intelligent sensor technology maximizes efficiency and lowers operating costs

MC0322 - 300lb Cube Ice Machine

Prodigy ELITE® Modular Cube Ice Machine

ENHANCED RELIABILITY

Integrated ICELINQ® App

Provides real-time diagnostics, access to settings and guided cleanings. The app also contains specific information for convenient maintenance.

Upgraded Sensors

Ice thickness and water sensor design enhances cleanability and amplifies durability.

Preservation Mode

Maximizes uptime and notifies users of potential issues.

EASE OF USE

AutoAlert™ Panel

The AutoAlert[™] panel displays relevant machine status that is visible across the room. Now featuring an external bin full indicator light and easier to read 16-segment display.

SANITARY DESIGN

Removable, External Air Filters

Speeds up cleaning process and reduces unit footprint.

WaterSense Adaptive Purge

Optimizes water consmption, keeping the machine cleaner and operating more efficiently.



24 Hour Volume Production

		Air Cooled		Wa	Water Cooled		
	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	
_	356/162 lb/kg		232/105 lb/kg	366/166 lb/kg		292/133 lb/kg	



Modular Bin Options



Model Number*	Dimensions W" x D" x H"	Bin Application Capacity lb/kg	Finish	Ship Weight lb/kg
B322S	22 x 34 x 44*	370/168	Metallic	140/64

^{*} Contact Scotsman for bin top requirements.



Small Cube 7/8" x 7/8" x 3/8" (2.22 x 2.22 x .95 cm)

Medium Cube 7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm)



Certification




















- 3 Years parts and labor on all components.
- 5 Years parts and labor on the evaporator.
- 5 Years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor



MC0322 - 300lb Cube Ice Machine

Prodigy ELITE® Modular Cube Ice Machine

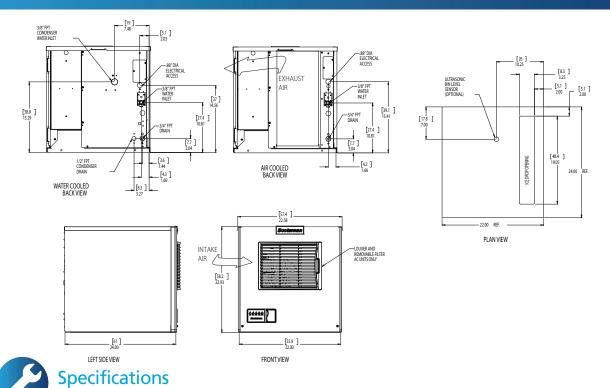

									Usage
	Nodel Number be Size: medium or small	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable	b (liters/45.4 kg) Condenser)/70°F(21°C)
٦ [MC0322MA-1	Air	115/60/1	15	2	12.7	6.95	18.0/68.2	-
med.	MC0322MW-1	Water	115/60/1	15	2	11.9	5.23	18.3/69.4	144.0/545.6
[- MC0322MA-32	Air	208-230/60/1	15	2	6.1	6.95	18.0/68.2	-
- 1	– MC0322SA-1	Air	115/60/1	15	2	12.7	6.95	18.0/68.2	-
ms	MC0322SW-1	Water	115/60/1	15	2	11.9	5.23	18.3/69.4	144.0/545.6
. [- MC0322SA-32	Air	208-230/60/1	15	2	6.1	5.23	18.3/69.4	144.0/545.6



All Models

Dimensions (W x D x H):

22" x 24" x 23" Unit:

(55.9 x 61.0 x 58.4 cm)

26" x 28" x 29" Shipping Carton:

(66 x 71.1 x 73.7 cm)

Shipping Weight: 155 lb / 70 kg

BTUs per hour: 5,200

Refrigerant: R-404A



Accessories

Model Number	Description
KVS KBILC KSBU KSBU-N KPAS XR-30	Vari-Smart™ Ice Level Control - Precisely control ice levels using ultrasonic technology. Basic Ice Level Control - Thermistor technology, ideal for dispenser applications. Smart-Board™ Advanced Control - Use additional operational data for fast diagnosis. Smart-Board™ Advanced Control with Network - Network capable. Prodigy Advanced Sustainability Kit - Includes KVS and KSBU - N XSafe® Sanitation System for Modular Cube - Continuous operation, field-installed.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details



Operating Requirements

	Minimum	Maximum	
Air Temperatures	50°F (10°C)	100°F (38°C)	
Water Temperatures	40°F (4.4°C)	100°F (38°C)	
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)	
Potable Water Pressure	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
Cond. Water Pressure	20 PSIG (1.4 bar)	230 PSIG (16.1 bar)	
Electrical Voltage	-5%	+10%	

Specifications and design are subject to change without notice





iceValet®

HD22 - 22" Hotel Dispenser

iceValet® Hotel Dispenser

Features

- Stores up to 120 lb. of cube ice.
- Simple push chute for easy ice dispensing.
- Modern, stylish design in a corrosion resistant metallic cabinet.
- Removable top panel allows access to the bin for easy cleaning without having to remove the ice machine.
- Improved sink depth that will accommodate almost every size hotel ice bucket.
- Equipped with an 11 ft. power cord.
- Match the iceValet[®] dispenser with a Scotsman Prodigy Plus[®] ice machine featuring self-monitoring technology, cost-saving energy efficiency, extended time between cleanings, easy-access servicing and built-in anti-microbial protection. All of these features add up to the smartest choice in ice.

Easy Push Chute





Storage Capacity

HD22

Application Bin Capacity

120/59 lb/kg



Matching Ice Machine Options

			24 Hr ice Production			
Model Number	Cube Size	Condenser Type	70°F/21°C 50°F/10°C lb/kg	Air Water	90°F/32°C 70°F/21°C lb/kg	
C0322MA	Medium	Air	356/162		232/105	_
C0322MW	Medium	Water	366/166		292/133	
C0322SA	Small	Air	356/162		232/105	
C0322SW	Small	Water	366/166		292/133	
C0522MA	Medium	Air	475/216		340/154	
C0522MW	Medium	Water	549/250		409/186	
C0522SA	Small	Air	475/216		340/154	
C0522SW	Small	Water	549/250		409/186	



Polyurethane Insulation

Foam insulation is forced between the wall and liner under heat and pressure to form a perfect wall to wall bond, preserving ice supply for long periods.



Certification















- \bullet 3 years parts and labor on all components.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor



- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.

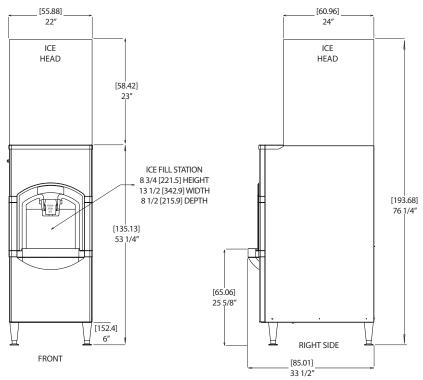



C0322 on HD22 hotel dispenser.

Specifications

Model Number	Actuation	Application Bin Capacity Ib/kg	Electrical	Circuit Wires	Min. Circuit Ampacity	Max. Fuse Size or HACR Circuit Breaker (amps)
HD22B-1	Push	120/59	115/60/1	2	Cord	15



Dimensions (W x D x H):

Unit: 22" x 33.5" x 47.25"

(55.9 x 85.1 x 120.0 cm)

Shipping Carton: 25" x 37" x 53"

(63.5 x 94 x 134.6 cm)

Shipping Weight: 201 lb / 91 kg



Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%
, and the second		

Specifications and design are subject to change without notice.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



• 1-800-SCOTSMAN Fax: 847-913-9844

• www.scotsman-ice.com customer.relations@scotsman-ice.com



