

# SRN110 – 110 lb Nugget Ice Machine

## Brilliance® Under-Counter Nugget Ice Machine



### Features

- 15" cabinet width, produces up to 110 lbs. of nugget ice in 24 hours
- Uses 40% less energy and more than 50% less water than gourmet cube ice machines
- Accepts custom wood panel to match surrounding cabinetry
- Approved for indoor or outdoor use
- Lighted bin
- Concealed door hinge system
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Available with built-in drain pump
- Field reversible door
- **Protected with AgION®, a silver-based antimicrobial compound molded into key ice machine components in order to guard internal surfaces between cleanings.**

### 24 Hour Ice Production & Storage Capacity

| 70°F/21°C Air<br>50°F/10°C Water<br>lb / kg | 90°F/32°C Air<br>70°F/21°C Water<br>lb / kg | Bin Storage Capacity<br>lb / kg |
|---------------------------------------------|---------------------------------------------|---------------------------------|
| 110 / 49.9                                  | 80 / 36.3                                   | 26 / 12                         |



Control Board



Scoop



- Units installed in elevations greater than 3,000 feet or 900 meters above sea level require an altitude adjustment to maintain proper ice level.



### Nugget Ice




The Original Chewable Ice™.  
Soft ice ideal for beverages  
and blended drinks.

### Warranty

- 2 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

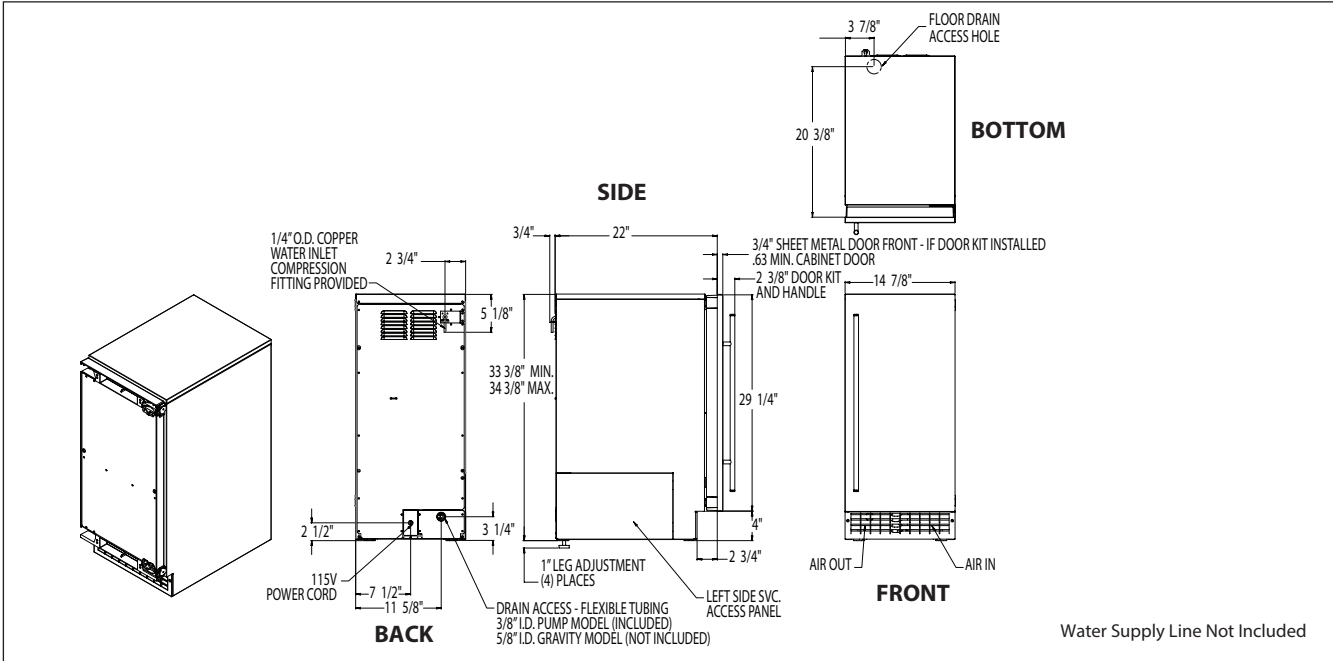

## All Models

24 Hour Ice Production:  
(70° Air/50° Water) 110 lb / 49.9 kg  
(90° Air/70° Water) 80 lb / 36.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required  
(Volts/Hz/Phase) 115/60/1

Amps: 5


Refrigerant: R290

Dimensions (W x D x H):  
Unit (without legs adjusted):  
14.875" x 22" x 33.375"  
(37.8 x 57.8 x 84.78 cm)

Shipping Carton: 18" x 28" x 38"  
(45.7 x 71.1 x 96.5 cm)

## Specifications

| Model        | Finish Cabinet / Front            | Drain Type | Shipping Weight lb / kg |
|--------------|-----------------------------------|------------|-------------------------|
| SRNG110A-1SU | Stainless Steel / Unfinished      | Gravity    | 124 / 56                |
| SRNG110A-1SS | Stainless Steel / Stainless Steel | Gravity    | 133 / 60                |
| SRNP110A-1SU | Stainless Steel / Unfinished      | Pump       | 129 / 59                |
| SRNP110A-1SS | Stainless Steel / Stainless Steel | Pump       | 138 / 63                |

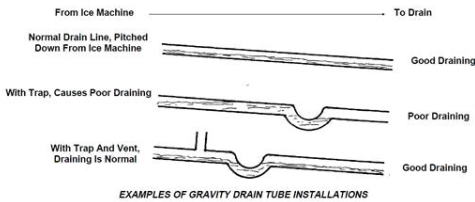

SRNG: Gravity flow drain tube  
SRNP: Built-in pump to expel drain water which includes 10' drain tube

## Accessories

| Model   | Description                       | Shipping Weight lb / kg |
|---------|-----------------------------------|-------------------------|
| KDFS    | Stainless Steel Door Front Kit    | 12 / 5.5                |
| KATB    | Anti-Tip Bracket Kit              | 2 / 0.9                 |
| KDFR    | Retro-Fit Door Front Kit          | 8 / 3.6                 |
| 19-0664 | Clear One Pre-Mixed Scale Remover |                         |

## Operating Requirements

|                    | Minimum         | Maximum         |
|--------------------|-----------------|-----------------|
| Air Temperatures   | 50°F (10°C)     | 100°F (38°C)    |
| Water Temperatures | 40°F (4.4°C)    | 90°F (38°C)     |
| Water Pressures    | 20 PSIG (1 bar) | 80 PSIG (5 bar) |
| Electrical Voltage | -10%            | +10%            |

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.