

Item # _____ Qty # ____ Model # ____ Project # ____



GAS RANGE

DCR24-GM / 24" Griddle Top Gas Range



GAS RANGE MODEL

Width Depth Height

DCR24-GM

24 in 31 1/2 in 56 in



- Stainless steel exterior including front, back sides, kick plate, back guard and over shelf
- Heavy duty 12" X 12" removable, cast iron top grates
- Oven temperature range between 175°F to 500°F
- 3/4" NPT rear gas connection and regulator
- Two(2) chrome oven rack per oven standard, multiple position oven rack guides
- Enamel interior oven for easy cleaning.
- 6" casters with lock for easy mobility.
- 3/4" Steel Plate.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

() 1-800-931-8628

info@dukersusa.com

www.DukersUSA.com

DETAILS &SPECIFICATIONS

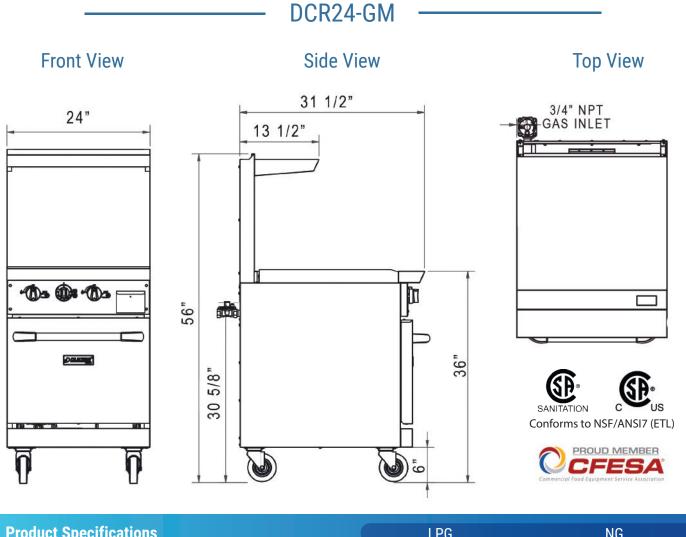

Product Specifications		LPG		NG	
WORKING AREA 24" x 20"		GRIDDLE			
GAS TYPE LPG/NG	BURNERS	2	1	2	1
OASTITE ELO/NO	SINGLE OUTPUT BTU	26000 BTU	30000 BTU	26000 BTU	30000 BTU
	NOZZLE #	53	52	43	40
	TOTAL OUTPUT BTU	82000 BTU		82000 BTU	
	GAS PRESSURE		10	!	5

Model	Packaging Dimensions (inches)		Net Weight	Ship Weight	Container Capacity	
	W	D	Н	(lbs)	(lbs)	40'HQ
DCR24-GM	26"	36 4/5"	38 1/5"	304.70	370.70	86

