Parts and Repair Kits

000065-40

TAG:


Squeeze Valve

Architect/Engineering Specifications:

Polished chrome plated squeeze valve with 3/4-14 UN male inlet and 5/8-27 female outlet. Certified to NSF 61-Section 9 and NSF 372.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____



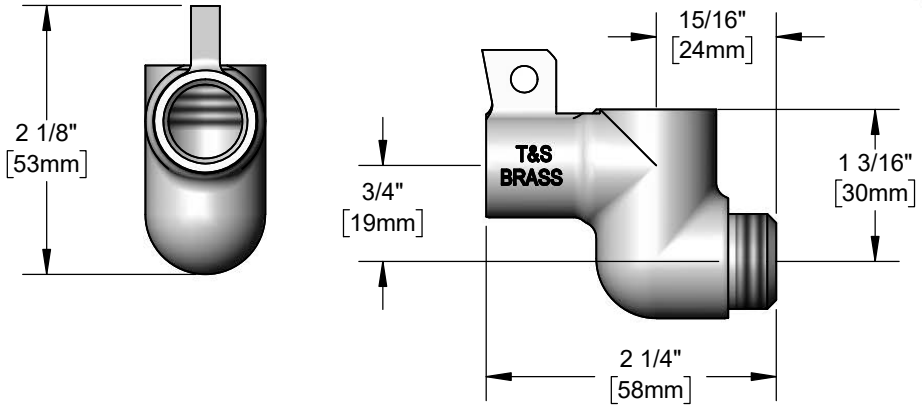

Features & Benefits:

- Squeeze valve
- 3/4-14 UN male inlet
- 5/8-27 UN female outlet
- Material: Polished chrome plated brass

Product Compliance:

- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - °F
- Flow Rate: GPM @ 60 psi

T&S BRASS AND BRONZE WORKS, INC.
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 05/31/19