



Swivel Sink and Pantry Faucets

5F-2SLX00



TAG:

Deck Mount Faucet

Architect/Engineering Specifications:

Single hole deck mount mixing faucet with polished chrome plated brass body, ceramic cartridges, lever handles, 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" O.D. compression connections. Certified to ASME A112.18.1\CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI\ICC A117.1 requirements.

Job Name		
Model Specified		Quantity
Variations Specified		
Date		

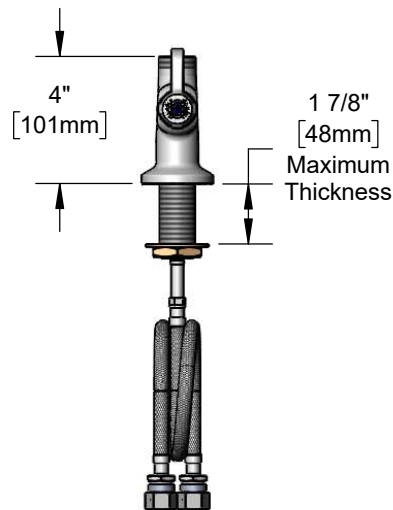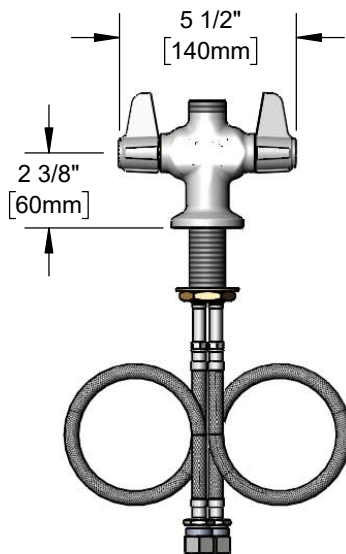

Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- Swivel outlet accepts equip swivel goosenecks
- Quarter-turn ceramic cartridges
- equip lever handles
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" O.D. compression connections
- Material: Polished chrome plated brass body and chrome plated metal handles

equip Swing Nozzles

- ☐ 5SP-06 6" Swing Nozzle
- ☐ 5SP-08 8" Swing Nozzle
- ☐ 5SP-10 10" Swing Nozzle
- ☐ 5SP-12 12" Swing Nozzle
- ☐ 5SP-14 14" Swing Nozzle
- ☐ 5SP-16 16" Swing Nozzle
- ☐ 5SP-18 18" Swing Nozzle

equip Swivel Goosenecks (D x K)

- ☐ 5SP-05 5 3/4" x 8 9/16" Swivel Gooseneck
- ☐ 5SP-09 9" x 7" Swivel Gooseneck

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate: 12.30 GPM [46.56 L/min] @ 60 psi [4.14 bar]

(Outlet Device &/or Final Configuration May Reduce Flow Rate)



ADA Compliant



equip Foodservice Accessories



• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-891-4808 • Fax 800-868-0084
www.tsbrass.com

Date: 08/31/20