



Faucets and Fittings

B-0103



TAG:

Rosespray Outlet

Architect/Engineering Specifications:

Rosespray with multi-laminar (non-aerated) spray pattern, 2.2 GPM flow disc (yellow) and 3/8" NPT male thread and o-ring. Certified to ASME A112.18.1/CSA B125.1, NSF 61- Section 9 and NSF 372.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

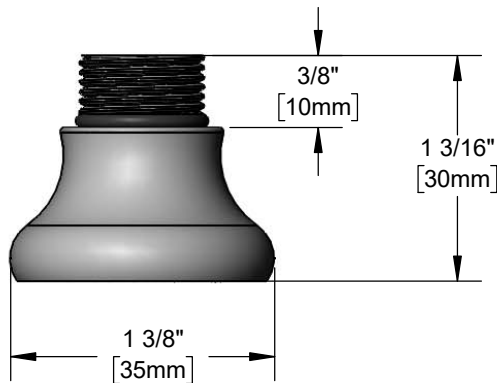

Features & Benefits:

- Rosespray w/ multi-laminar (non-aerated) spray pattern
- 2.2 GPM flow disc (yellow)
- 3/8" NPT male thread
- O-ring included
- Material: Chrome plated brass body

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 2.2 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 03/06/20