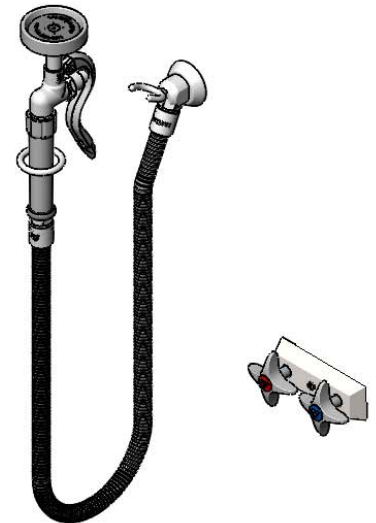
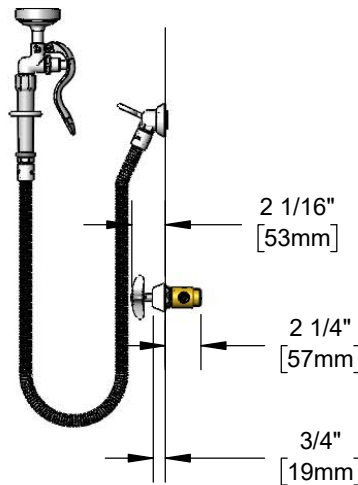
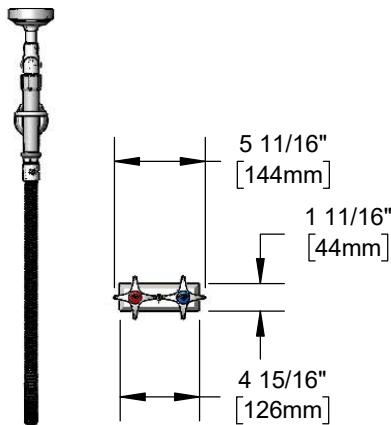


**Architect/Engineering Specifications:**

3" concealed mixing faucet with compression cartridges with spring checks, 4-arm handles, 3/8" NPT female inlets and outlet, chrome plated escutcheon, flexible stainless steel hose with 1.15 GPM spray valve, and wall hook. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF-372. 2019 DOE PRSV - Class II compliant.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

**Features & Benefits:**

- 3" concealed mixing faucet
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- 4-arm handles w/ color coded indexes
- 3/8" NPT female inlets
- 3/8" NPT female outlet
- Chrome plated escutcheon
- 44" flexible stainless steel hose
- 1.15 GPM spray valve
- Wall hook w/ 3/8" inlet
- Material: Brass body, chrome plated metal handles and chrome plated brass valve body & escutcheon

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 1.15 GPM @ 60 psi

**Optional Cartridges With Checks**

- ☐ Quarter-Turn Cerama w/ Check Valve
- ☐ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Pre-Rinse Spray Valves

- ☐ B-0107 (1.15 GPM) (Standard)
- ☐ B-0107-C (0.65 GPM)
- ☐ B-0107-J (1.07 GPM)
- ☐ B-0108 (1.07 GPM)
- ☐ B-0108-C (0.65 GPM)

Optional Handles

- ☐ 4" Wrist Action
- ☐ Lever
- ☐ 4-Arm (Standard)

