



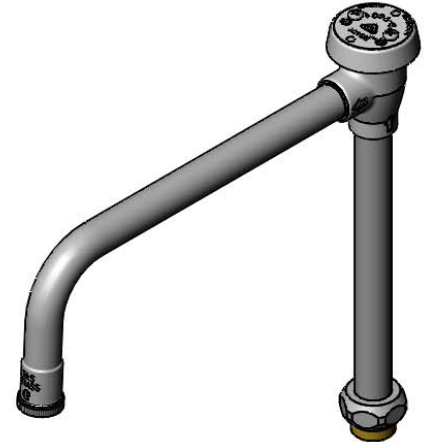

Architect/Engineering Specifications:

Swivel gooseneck with polished chrome plated brass riser and nozzle, atmospheric vacuum breaker and stream regulator outlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and ASSE 1001.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

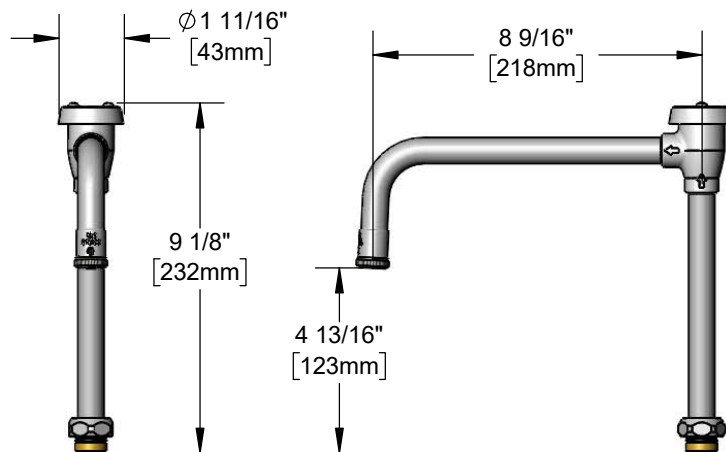

Features & Benefits:

- Polished chrome plated brass swivel gooseneck
- 6 13/16" riser
- Atmospheric vacuum breaker
- 8 9/16" nozzle
- Stream regulator outlet, Series 2
- Material: Polished chrome plated brass tubular nozzle and riser

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ASSE 1001 (VB)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate: 12.80 GPM [48.45 L/min] @ 60 psi [4.14 bar]



Optional Outlets (Series 2 / VR Series 7)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	☐ B-0199-02-N035	N/A	☐ B-0199-07-N035
0.5	N/A	☐ B-0199-02-N05	N/A	☐ B-0199-07-N05
1.0	☐ B-0199-02-F10	N/A	☐ B-0199-07-F10	N/A
1.2	☐ B-0199-02-F12	N/A	☐ B-0199-07-F12	N/A
1.5	☐ B-0199-02-WS	N/A	☐ B-0199-07-WS	N/A
2.2	☐ B-0199-02	N/A	☐ B-0199-07	N/A

