



Pot and Kettle Fillers

B-0580


TAG:

Pot Filler

Architect/Engineering Specifications:

Wall mount pot filler with chrome plated brass body, 18" double joint swing nozzle, on-off volume control outlet with insulated grip, 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

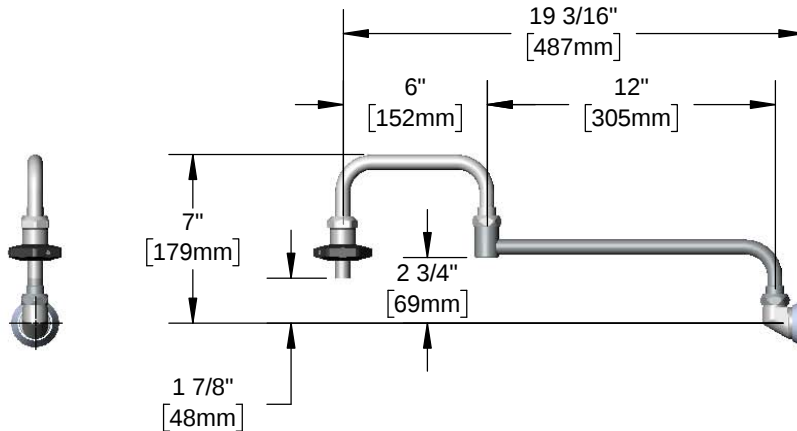

Features & Benefits:

- Wall mount pot filler w/ chrome plated brass body
- 18" double joint swing nozzle
- On-off volume control outlet with insulated grip
- 1/2" NPT female inlet
- ϕ 2" wall flange
- Material: Polished chrome plated brass

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 12.30 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 02/20/17