



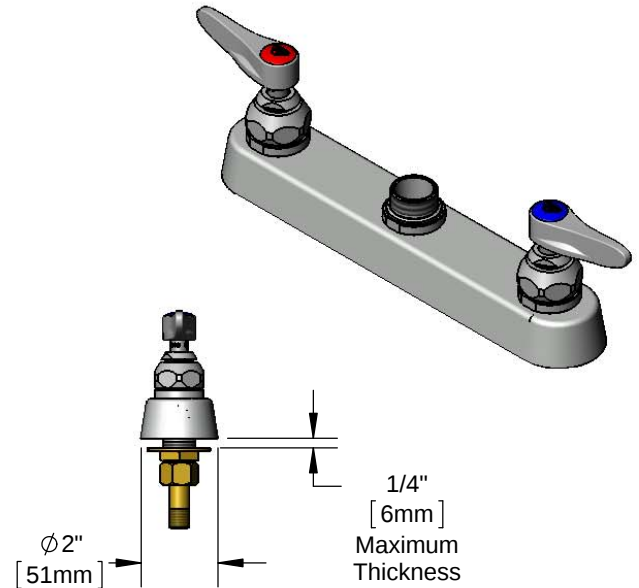

#### Architect/Engineering Specifications:

8" deck mount mixing faucet with chrome plated brass body, swivel outlet (less nozzle), compression cartridges with spring checks, lever handles, 1/2" NPT male inlets and chrome plated escutcheon. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

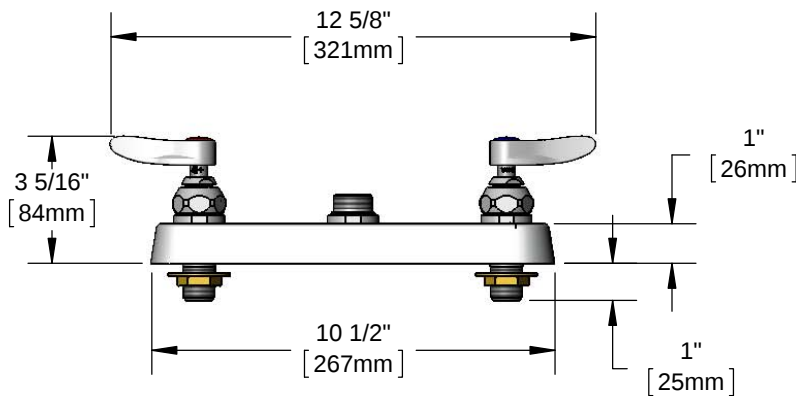

#### Features & Benefits:

- 8" deck mount mixing faucet w/ chrome plated brass body
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- Swivel outlet accepts T&S swing nozzles
- 1/2" NPT male inlets
- Tailpieces and nuts for 1/4" NPT male connections
- Chrome plated escutcheon
- Material: Chrome plated brass body & tubular spout and chrome plated metal handles & escutcheon

#### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



**Warranty:** One Year (Limited)

#### Performance Data:

- Pressure: 20 - 125 psi
  - Temperature: 40°F - 140°F
  - Flow Rate: 8.78 GPM @ 60 psi
- (Outlet Device &/or Final Configuration May Reduce Flow Rate)



ADA Compliant

#### T&S Swing Nozzles w/ 2.2 GPM Aerator

- ☐ 059X-A22 6" Swing Nozzle
- ☐ 060X-A22 8" Swing Nozzle
- ☐ 061X-A22 10" Swing Nozzle
- ☐ 062X-A22 12" Swing Nozzle
- ☐ 063X-A22 14" Swing Nozzle
- ☐ 068X-A22 18" Double Joint Swing Nozzle

#### T&S Swivel Goosenecks w/ 2.2 GPM Aerator (D x K)

- ☐ 131X-A22 2 15/16" x 2 3/16" Swivel Gooseneck
- ☐ 132X-A22 2 11/16" x 4 7/8" Swivel Gooseneck
- ☐ 133X-A22 5 3/4" x 5 15/16" Swivel Gooseneck
- ☐ 135X-A22 8 13/16" x 5 1/8" Swivel Gooseneck

#### Optional Cartridges

- ☐ Quarter-Turn Cerama w/ Check Valve
- ☐ Quarter-Turn Eterna w/ Spring Check (Standard)

#### Optional Handles

- ☐ 4" Wrist Action
- ☐ Lever (Standard)

