

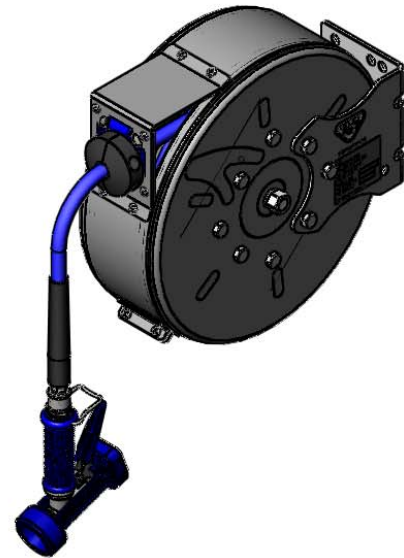


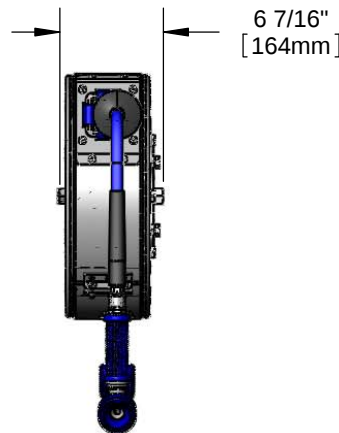

Architect/Engineering Specifications:

Enclosed stainless steel hose reel with swivel, rear trigger water gun with swivel, 3/8" x 30' heavy-duty non-marking hose, ratcheting system, multi-fit bracket, Adjustable hose bumper and 3/8" NPT female inlet.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

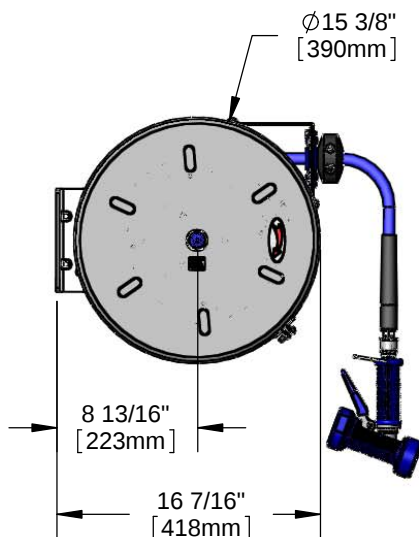

Features & Benefits:

- Enclosed stainless steel hose reel
- Stainless steel rear trigger water gun with rubber cover, swivel and 5/16" orifice
- 3/8" x 30' heavy-duty non-marking hose rated to 300 PSI
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/8" NPT female inlet
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- Material: stainless steel enclosed reel, wall bracket and water gun

Product Compliance:

- NSF 61 Exempt (Non-Potable)
- EPA 2005 Non-Compliant (PRSV)

Warranty: Two Year (Limited)

- Hose: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 200 °F
- Flow Rate: 4.30 GPM @ 60 psi

Optional Hose Reel Spray Valves

- | | |
|-------------------------------------|---|
| ☐ B-0107 | Spray Valve |
| ☐ B-0108 | Ergonomic Medium Flow Spray Valve |
| ☐ B-0108-H | Ergonomic High Flow Spray Valve |
| ☐ EB-0107 | High Flow Spray Valve |
| ☐ EB-2322 | Extended Spray Wand |
| ☐ MV-2516-24 | Stainless Steel Rear Trigger Water Gun (Standard) |
| ☐ MV-2522-24 | Stainless Steel Front Trigger Water Gun |
| ☐ MV-3516-24 | Aluminum Rear Trigger Water Gun |

Optional Hose Reel Multi-Fit Brackets

1/4", 3/8", & 1/2" Stainless Steel Hose Reel

- | | |
|-------------------------------------|---|
| ☐ G016737-45 | Stainless Steel Wall Swing Bracket |
| ☐ G016652-45 | Deck Mount Pivot Bracket |
| ☐ G018477-45 | Stainless Steel Table Leg Swing Bracket |

