



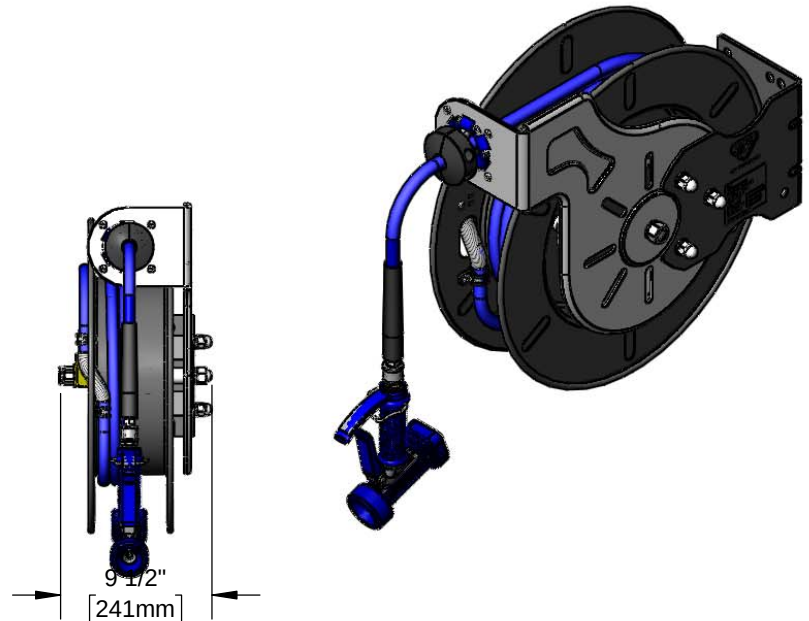

Architect/Engineering Specifications:

Open epoxy coated hose reel, front trigger water gun with swivel, 3/8" x 50' heavy-duty non-marking hose, ratcheting system, multi-fit bracket, adjustable hose bumper and 3/8" NPT female inlet.

Job Name		
Model Specified		Quantity
Variations Specified		
Date		

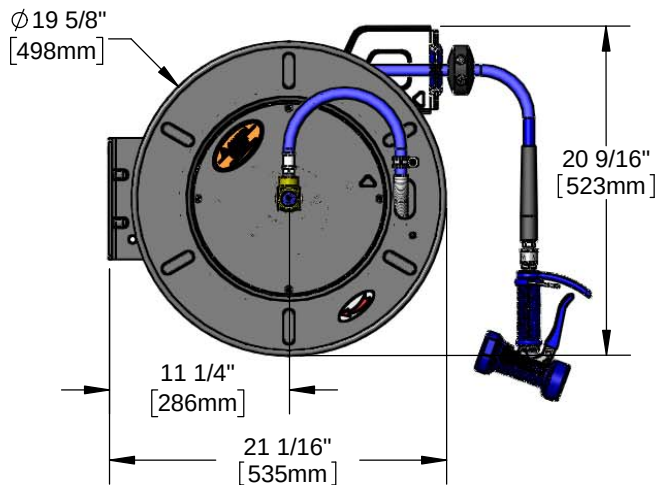

Features & Benefits:

- Open epoxy coated hose reel
- Stainless steel front trigger water gun & swivel with rubber cover and 5/16" orifice
- 3/8" x 50' heavy-duty non-marking hose rated to 300 PSI
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/8" NPT female inlet
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- Material: Epoxy coated steel open reel & wall bracket and stainless steel water gun

Product Compliance:

- NSF 61 Exempt (Non-Potable)
- EPA 2005 Non-Compliant (PRSV)

Warranty: Two Year (Limited)

- Hose: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 200 °F
- Flow Rate: 3.70 GPM @ 60 psi

Optional Hose Reel Spray Valves

☐ B-0107	Spray Valve
☐ B-0108	Ergonomic Medium Flow Spray Valve
☐ B-0108-H	Ergonomic High Flow Spray Valve
☐ EB-0107	High Flow Spray Valve
☐ EB-2322	Extended Spray Wand
☐ MV-2516-24	Stainless Steel Rear Trigger Water Gun
☐ MV-2522-24	Stainless Steel Front Trigger Water Gun (Standard)
☐ MV-3516-24	Aluminum Rear Trigger Water Gun

Optional Hose Reel Multi-Fit Brackets

3/8" x 50' Epoxy Coated Hose Reel

☐ G016637-45	Epoxy Coated Wall Swing Bracket
☐ G016652-45	Deck Mount Pivot Bracket
☐ G018477-45	Stainless Steel Table Leg Swing Bracket

