Gas Hoses
HG-2C-48S

TAG:

SAFE-T-LINK *Gas Hose*

Architect/Engineering Specifications:

48" coated gas appliance connector hose with 1/2" NPT male swivel connections. Certified to ANSI Z21.69/CSA 6.16 and NSF 2.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____

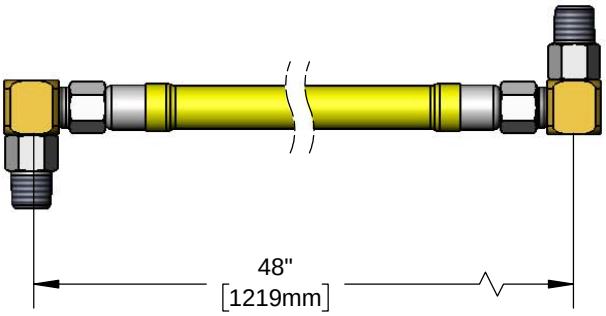

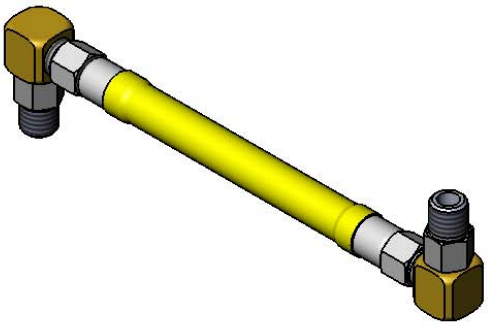



90° Elbows

Features & Benefits:

- 48” coated gas appliance connector
- 1/2" NPT male swivel inlet
- 1/2" NPT male swivel outlet
- (2) 90˚ elbows included
- 360˚ rotatable hex nut rotates completely and freely
- Optimum torsional relief improves safety, increases connector life
- Provides efficient, full gas flow
- Material: Extruded coated stainless steel braids

Product Compliance:

- ANSI Z21.69 / CSA 6.16
- NSF 2
- NFPA 54

Warranty: Five Year (Limited)

Performance Data:

- Gas Pressure: 1/2 psi max
- Temperature: 350˚F max
- Capacity: 106,000 BTU/ hr min

T&S BRASS AND BRONZE WORKS, INC.
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 06/23/17