



# Gas Hoses

## HG-2F-36




TAG:

SAFET-LINK Gas Hose

### Architect/Engineering Specifications:

36" coated gas appliance connector hose with 1 1/4" NPT male connections. Certified to ANSI Z21.69/CSA 6.16 and NSF 2.

Job Name \_\_\_\_\_  
Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
Variations Specified \_\_\_\_\_  
Date \_\_\_\_\_

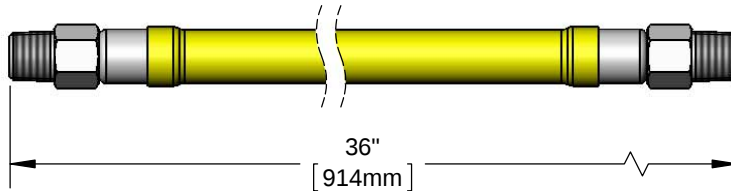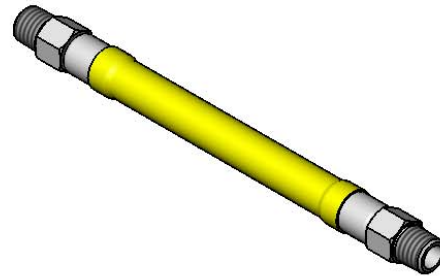

90° Elbows



### Features & Benefits:

- 36" coated gas appliance connector
- 1 1/4" NPT male freespin inlet
- 1 1/4" NPT male freespin outlet
- (2) 90° elbows included
- 360° rotatable hex nut rotates completely and freely
- Optimum torsional relief improves safety, increases connector life
- Provides efficient, full gas flow
- Material: Extruded coated stainless steel braids

### Product Compliance:

- ANSI Z21.69 / CSA 6.16
- NSF 2
- NFPA 54

**Warranty:** Five Year (Limited)

### Performance Data:

- Gas Pressure: 1/2 psi max
- Temperature: 350° F max
- Capacity: 945,000 BTU/ hr min



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690  
Ph 800-476-4103 • Fax 864-834-3518  
• Simi Valley, CA • Ph 800-423-0150 • [www.tsbrass.com](http://www.tsbrass.com)

Date: 10/09/15