



**Gas Hoses**  
**HG-SD-36**



TAG:

SAFETY-LINK Gas Hose

**Architect/Engineering Specifications:**

36" corrosion protection coated gas stationary appliance connector hose with 3/4" NPT female inlet and outlet. Certified to ANSI Z21.24 / CSA 6.10, NFPA 54 and ANSI Z21.75 / CSA 6.27.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

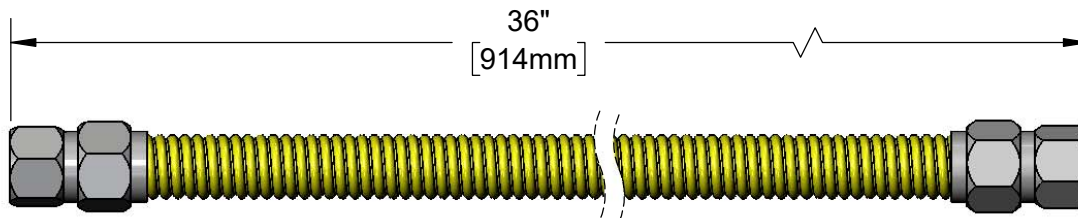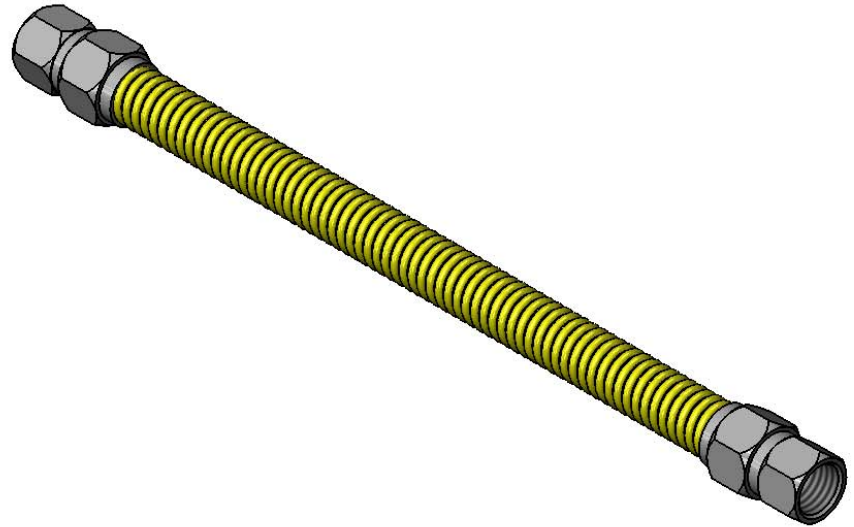

**Features & Benefits:**

- 36" corrosion protection coated gas stationary appliance connector
- 3/4" NPT female freespin inlet and outlet
- 360° rotatable hex nut rotates completely and freely
- Optimum torsional relief improves safety, increases connector life
- Provides efficient, full gas flow
- Material: Extruded coated stainless steel corrugations

**Product Compliance:**

- ANSI Z21.24 / CSA 6.10
- NFPA 54
- ANSI Z21.75 / CSA 6.27

**Warranty:** Five Year (Limited)

**Performance Data:**

- Gas Pressure: 1/2 psi max
- Temperature: 350 °F max w/ fuseable link thermal shut-off
- Capacity: 255,000 BTU/ hr min



**T&S BRASS AND BRONZE WORKS, INC.**



• 2 Saddleback Cove • Travelers Rest, SC 29690  
 Ph 800-476-4103 • Fax 864-834-3518  
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 11/22/17