




Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301

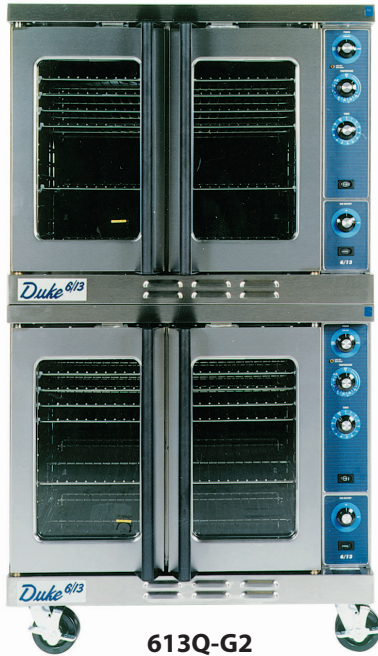

**613Q-G2**

(Shown with optional casters)

## OPTIONS:

- ☐ Stainless steel interior
- ☐ Stainless steel back enclosure panel
- ☐ Seismic feet
- ☐ 48" flexible disconnect, w/restraining device
- ☐ Down draft hood
- ☐ Common gas manifold
- ☐ Double stack - shipped assembled
- ☐ Flue deflector
- ☐ Casters
- ☐ Porcelain drip tray
- ☐ Extra oven racks
- ☐ Prison package - tamper proof screws, lexan hinged cover with lockable clasp
- ☐ Extended warranty

DUKE MANUFACTURING CO.

2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1079 613Q-G2 Double-Gas

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

MODEL:

### Duke Convection Ovens - "Q" Series Double Deck - Standard Depth - Gas

- **613Q-G2** Double deck, standard depth

### STANDARD FEATURES

- 40,000 BTU
- 6 racks/13 rack positions
- Porcelain interior finish
- 50/50 independent stainless steel doors
- Double pane glass both doors
- 8" angular stainless steel legs/adjustable feet
- 2 Speed motor

### OVEN SECTION

- Stainless steel front, sides and top
- 1 1/2" insulation on bottom, sides and back
- 3" insulation on top
- Interior lights

### BURNER SYSTEM

- 40,000 BTU on each oven
- High output atmospheric burner system
- Main gas shut off valve
- Built-in gas regulator

### OVEN CONTROLS

- ☐ "V" - Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- ☐ "XX" - Solid state digital time and temperature controls, 12-hour countdown timer, **Cook and Hold** feature, 2-speed fan, Pulse fan capability

### Certifications



Specification subject to change




**WARNING:** Cancer and Reproductive Harm -  
www.p65warnings.ca.gov


# DUKE CONVECTION OVENS

## "Q" SERIES


### DOUBLE DECK - GAS - STANDARD DEPTH

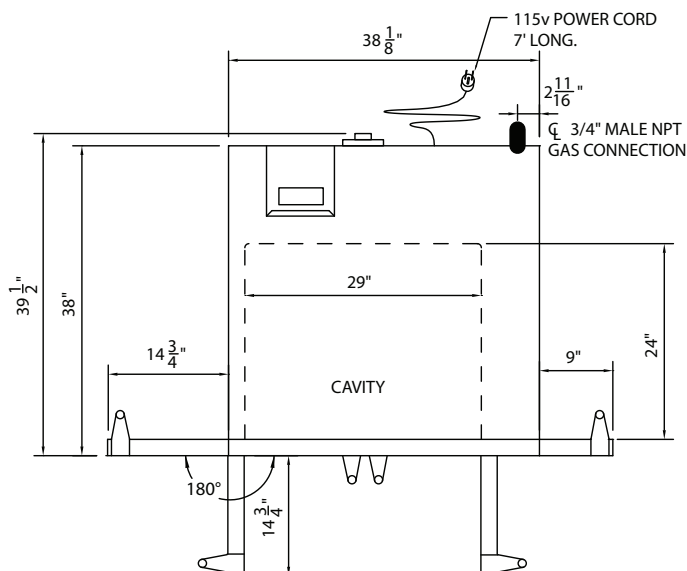

**TOP VIEW**

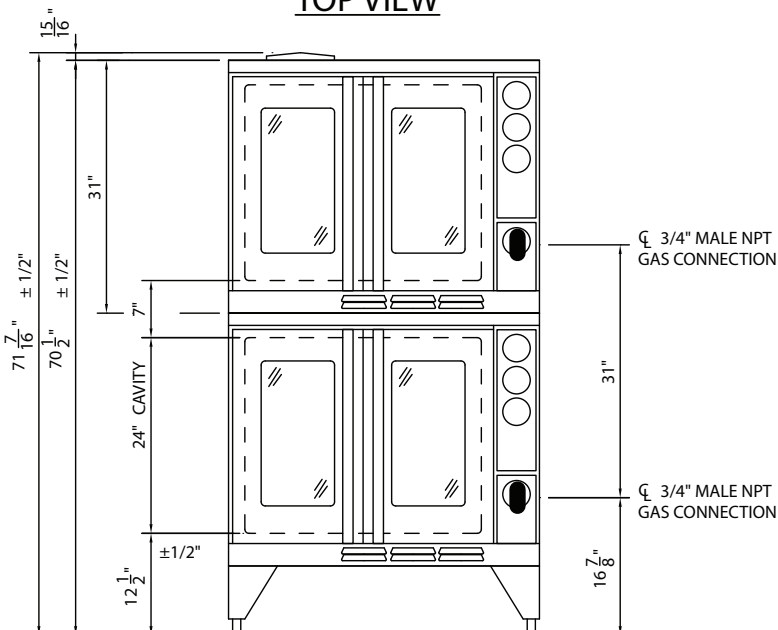

**FRONT VIEW**

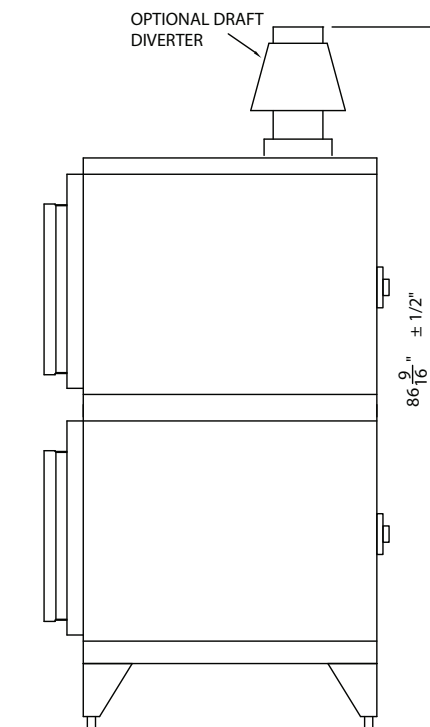

**RIGHT SIDE VIEW**

| Gas Specifications                                               |                 |        |
|------------------------------------------------------------------|-----------------|--------|
| <b>613Q-G2</b>                                                   | <b>BTU/Hour</b> | 40,000 |
| Regulated gas pressure required 3.5" WC natural / 10" WC propane |                 |        |
| Combustible surface clearance - 1" side, 1" rear, 6" floor       |                 |        |
| Gas connection                                                   |                 |        |
| 3/4" Gas connection                                              |                 |        |
| Electrical requirements: 3.5 Amps/ 115V                          |                 |        |
| Standard 115V units supplied with 5' cord and plug               |                 |        |

Specify gas type

Specify altitude over 2000 feet

#### DIMENSIONS:

| Model          | Height |       | Width |      | Depth |       | Cube ft.<br>crated | Weight |       |
|----------------|--------|-------|-------|------|-------|-------|--------------------|--------|-------|
|                | in.    | cm    | in.   | cm   | in.   | cm    |                    | lbs.   | kg    |
| <b>613Q-G2</b> | 39.5   | 100.3 | 38    | 96.5 | 70.5  | 179.1 | 69.7               | 1080   | 490.0 |

#### Freight Class: 85



Your Solutions Partner

**Duke Manufacturing Co.**

2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130

Toll Free: 1-800-735-3853

Fax: 314-231-5074

[www.dukemfg.com](http://www.dukemfg.com)

Printed in U.S.A

© 2019, Duke Manufacturing Co.