



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



613Q-G3

OPTIONS:

- ☐ Stainless steel interior
- ☐ 27" stainless steel angular legs
- ☐ Open leg base, stainless steel, w/rack guides
- ☐ Stainless steel back enclosure panel
- ☐ Seismic feet
- ☐ Field stacking kit
- ☐ Common gas manifold
- ☐ 48" flexible disconnect, w/restraining device
- ☐ Down draft hood
- ☐ Flu deflector
- ☐ Casters
- ☐ Porcelain drip tray
- ☐ Extra deep oven racks
- ☐ Prison package - tamper proof screws, lexan hinged cover with lockable clasp
- ☐ Extended warranty

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1080 613Q-G3 Single-Deep-Gas

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Duke Convection Ovens - "Q" Series Single Deck - Deep Depth - Gas

- **613Q-G3** Single deck, deep depth

STANDARD FEATURES

- 6 racks/13 rack positions
- Porcelain interior finish
- 50/50 stainless steel independent doors
- Doublepane glass both doors
- 27" angular painted/adjustable legs
- 2 Speed motor

OVEN SECTION

- Stainless steel front, sides and top
- 1 ½" insulation on bottom, sides and back
- 3" insulation on top
- Interior lights

BURNER SYSTEM

- 40,000 BTU
- High output atmospheric burner system
- Main gas shut off valve
- Bult-in gas regulator

OVEN CONTROLS

- ☐ "V" - Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- ☐ "XX" - Solid state digital time and temperature controls, 12-hour countdown timer, **Cook and Hold** feature, 2-speed fan, Pulse fan capability

Certifications




WARNING: Cancer and Reproductive Harm -
www.p65warnings.ca.gov

Specification subject to change


DUKE CONVECTION OVENS

"Q" SERIES


SINGLE DECK - GAS - DEEP DEPTH

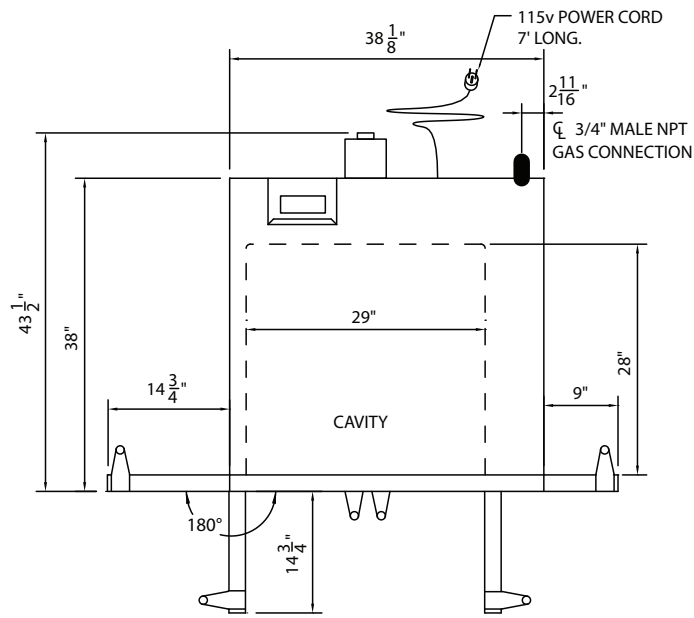

TOP VIEW

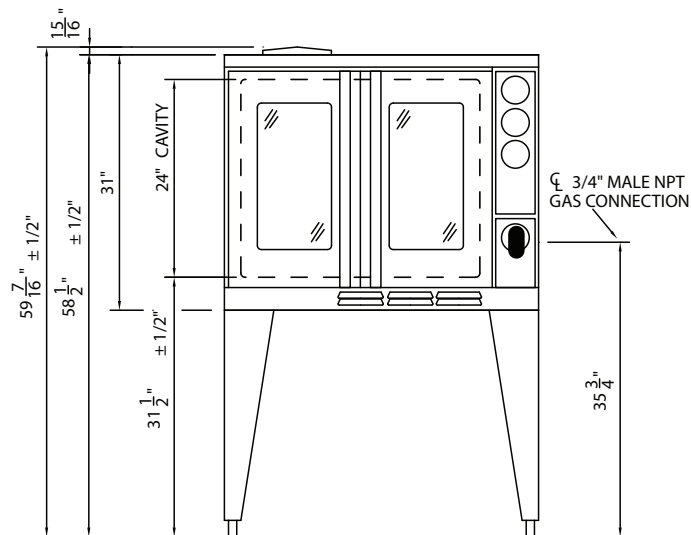

FRONT VIEW

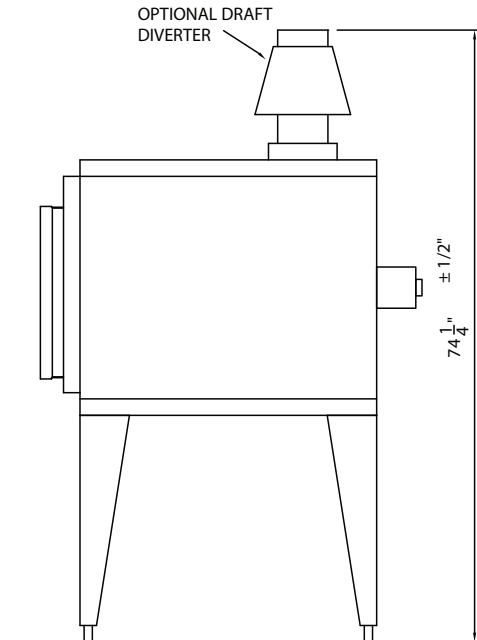

RIGHT SIDE VIEW

Gas Specifications		
613Q-G3	BTU/Hour	46,000
Regulated gas pressure required 3.5"WC natural /10" WC propane		
Combustible surface clearance - 1" side, 1" rear, 6" floor		
● Gas connection		
3/4" Gas connection		
Electrical requirements: 3.5 Amps/ 115V		
Standard 115V units supplied with 5' cord and plug		

Specify gas type

Specify altitude over 2000 feet

DIMENSIONS:

Model	Height		Width		Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm		lbs.	kg
613Q-G3	43.5	110.5	38	96.5	60.	152.4	65.4	540	245.5

Freight Class: 85



Your Solutions Partner

Duke Manufacturing Co.

2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130

Toll Free: 1-800-735-3853

Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A

© 2019, Duke Manufacturing Co.