

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
ALA #:	SIS #:
CSI Section 11400	

Narrow Back Bars

*Underbar Equipment
Super Deluxe Series*

**Model : TBB-24-48SBD-N6
TBB-24-48SGD-N**



TBB-24-48SGD-N



TBB-24-48SBD-N6



FEATURES & BENEFITS

■ Equipped with easy-to-clean Air Filter

The accumulation of dust in the condenser causes failures or breakdowns in refrigeration. Refrigeration operate normally until they accumulate a certain amount of dust. When they reach their limit, performance will drop rapidly, resulting in damages and possible disposal of stored goods. This is why all refrigeration manufacturers require the condenser to be cleaned at least once a month for warranty to remain valid. With Turbo Air, this process is simple and easy due to the frontal access air filter device. Pull out the filter and vacuum lightly to remove the dust. Place it back into position when complete.

■ Hydrocarbon refrigerants (R-290 / R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ Stainless steel countertop and interior

The exterior and interior of the cabinet are constructed with heavy gauge reinforced stainless steel. Turbo Air Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ Digital Temperature Controller

External digital temperature control has an easily accessible panel to quickly adjust temperatures, which includes a defrost control.

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ LED interior lighting

■ Double pane glass doors with Low-E glass (SGD Models)

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Adjustable, stainless steel shelves

■ Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.

■ Refrigerator holds 33°F ~ 38°F for the best in beverage preservation

‡ ENERGY STAR rated models



ENERGY STAR®
Qualified

Model	Swing Doors	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
TBB-24-48SBD-N6‡	2	12.2	-	4	1/5	1.8	238	49 1/8 x 24 1/2 x 35 3/8
TBB-24-48SGD-N	2	12.2	-	4	1/3	2.6	238	49 1/8 x 24 1/2 x 35 3/8

Narrow Back Bars

Underbar Equipment
Super Deluxe Series

Model : TBB-24-48SBD-N6, TBB-24-48SGD-N

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	1.8 (SBD) / 2.6 (SGD)
Compressor HP	1/5 (SBD) / 1/3 (SGD)
Refrigerant	R-600a (SBD) / R-290 (SGD)
Cord Length (ft.)	8.5
Lamp (W)	7.5
DIMENSIONAL DATA	
Capacity	1/2 Barrels
	cu. ft.
	-
	12.2
Ext. Length Overall (in.)	49 1/8 (1248mm)
Ext. Depth Overall (in.)*	24 1/2 (623mm)
Ext. Height Overall (in.)†	35 3/8 (900mm)
# of Swing Doors	2
# of Shelves	4
Shelf size (L x D) (in.)	16 3/4 x 18
# of Casters	5EA
Net Weight (lbs.)	220 (SBD) / 231 (SGD)
Gross Weight (lbs.)	253 (SBD) / 264 (SGD)

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

*Depth does not include 3/8" (SBD) / 1-1/2" (SGD) for door handles.

Depth does not include 1-1/4" for rear spacers.

† Height does not include 3-1/8" for caster height.

- **WARRANTY :** 5 Year Parts and Labor Warranty
7 Year Compressor Warranty

■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- 2.5" dia. swivel casters with locks on the front set
- Door locks


■ OPTIONAL ACCESSORIES

- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, 1/2" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100
- Additional PE coated wire shelf: P0178S0400


Ver.20230103

PLAN VIEW


(unit : inch)

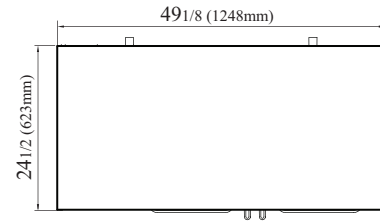


TOP VIEW

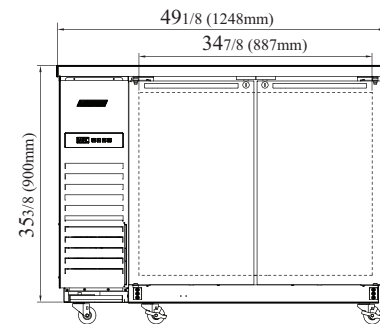

TBB-24-48SBD-N6 FRONT VIEW

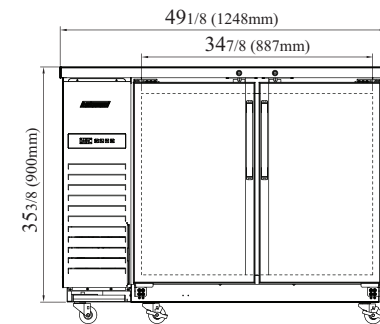

TBB-24-48SGD-N FRONT VIEW

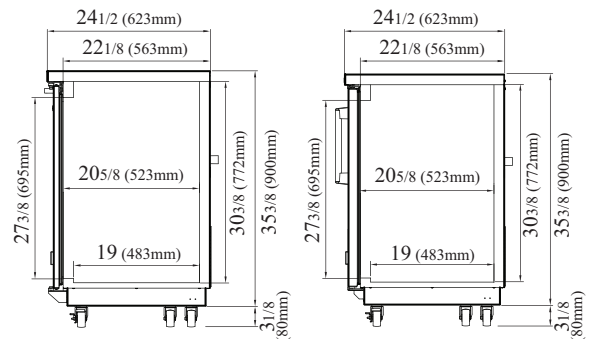

TBB-24-48SBD-N6 & TBB-24-48SGD-N SIDE VIEW

NATURAL
Refrigerant

SPEC
ISO 9001:2008

ETL
Intertek

ETL
Intertek

3 YEAR
WARRANTY

Compressor
7 YEAR
WARRANTY
(10.5 A amp)

ENERGY STAR®
Qualified

- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

TURBO air
REFRIGERATION MANUFACTURER

GERMAN
KNIFE

RADIANCE

TURBO air
REFRIGERATION SYSTEM

TEXAKING

Continued product development may necessitate specification changes without notice.