AccuTemp
INNOVATIVE COOKING EQUIPMENT SOLUTIONS

STEAM & HOLD™
VACUUM STEAMER

S3 Countertop Steam&Hold Steamer™

3 Pan, Electric, Vacuum Capable, Connectionless Steamer

Project: _____ Location: _____ Item #: _____Quantity:_____

Standard Features

- Fast cook, low temp, steam, and hold modes
- Super Duty heater configuration
- No water or drain line required
- No hood required (in most areas)
- 3 gallon water reservoir
- Heating element not exposed to water
- No deliming, descaling, or blowdowns
- No water quality exclusions to warranty
- Heavy duty door
- Low water protection with light and buzzer
- Heat, cook, and hold indicator lights
- Fast cook and thermostat mode selector switch
- Vacuum and temperature gauges
- Certified as a holding cabinet and UL listed
- 90 minute timer
- Right hand hinged door
- Quick release door—open door while cooking
- Patented vacuum technology for efficiency & faster cooking
- Continuous cook and hold mode settings on timer
- Power on switch
- Steamer cavity made of durable reinforced 14 ga. 304 stainless steel
- 5' power cord and plug included
- Front mounted drain valve
- Exclusive and patented low temperature steam cooking mode
- Multiple kilowatt outputs available to suit cooking needs
- One year parts and labor warranty
- Lifetime Service and Support Guarantee
- Steam Director covers water for added safety
- Field Reversible Door

Optional Features

- Chain package—factory preset hold temperature; controls behind panel
- Military package
- Corrections package—tamper resistant
- Marine package
- Drain kit
- 4" adjustable bullet feet or flanged feet
- Stainless steel support stand with casters, bullet or flange feet
- Double stacking stand conversion kit
- Perforated cooking shelf
- Steamer door crack open feature
- 4" full size (12x20x4") drain pan
- One year extended warranty

Safety, Sanitation & Environmental

c UL us LISTED

NSF/ANSI 4

CE

ENERGY STAR

- EPA 202 Evaluated / NFPA 96 4.1.1.2 Compliant

ECOLOGIX

U.S. GREEN BUILDING COUNCIL USGBC

MADE IN THE USA

Pan Capacities

Pan Size	Qty.
#200 full size (12x20x2.5")	3
#400 full size (12x20x4")	2

Short Spec

Steam&Hold™ steamer is AccuTemp Products patented vacuum technology steam cooker with 3 operating modes. Fast cook (212°F), low temperature steam mode (150–200°F) and NSF certified variable temperature hold mode. Steam to be produced inside the cooking cavity with no heating element exposed to water. No water or drain line required. Unit to include heavy duty door, which will open at any time during cooking cycle. Steamer to include low water indicator light and buzzer with auto shutdown feature. Unit to be UL, and ENERGY STAR® qualified. Built in the USA.



S3 Countertop Steam&Hold™ Steam Cooker shown with optional 4" adjustable legs and 4" drain pan

AccuTemp product may be covered by one or more US Patents. See www.accutempip.net

AccuTemp Products, Inc.
800-210-5907 | accutemp.net

AccuTemp
INNOVATIVE COOKING EQUIPMENT SOLUTIONS

STEAM & HOLD
VACUUM STEAMER


S3 Countertop Steam&Hold Steamer™

3 Pan, Electric, Vacuum Capable, Connectionless Steamer

Steamer Model "D" Specifications								
Model #	*S32081D060*	*S32401D060*	*S32083D100*	*S32403D110*	*S32083D120*	*S32403D130*	*S34403D090*	*S34803D110*
Volts AC	*208*	*240*	*208*	*208 | 240*	*208*	*240*	*440*	*480*
Phase	*1*	*1*	*3*	*3*	*3*	*3*	*3*	*3*
Amps	*29*	*25*	*28*	*22 | 26*	*33*	*32*	*12*	*13*
Breaker Size	*30 amp*	*30 amp*	*30 amp*	*30 amp*	*50 amp*	*50 amp*	*20 amp*	*20 amp*
Watts	*6kW*	*6kW*	*10kW*	*8kW | 11kW*	*12kW*	*13kW*	*9kW*	*11kW*
NEMA Plug	*L6-30P*	*L6-30P*	*L15-30P*	*L15-30P*	*15-50P*	*15-50P*	*L16-20P*	*L16-20P*


Shipping Weight	*Shipping Dimensions*
168 lbs	*32" x 36" x 27"*

Steamer Model "F" Specifications - CE Models ONLY				
Model #	*S32301F070*	*S34005F110*		
Volts AC	*230*	*380*	*400*	*415*
Phase	*1*	*3*	*3*	*3*
Amps	*32*	*14*	*14*	*15*
Breaker Size	*40 amp*	*20 amp*	*20 amp*	*20 amp*
Watts	*7kW*	*9kW*	*10kW*	*11kW*
IEC Plug	*60309-2 2P/3W/6H 220-250V*	*60309-2 3P/5W/6H 220/380-240/415V*		

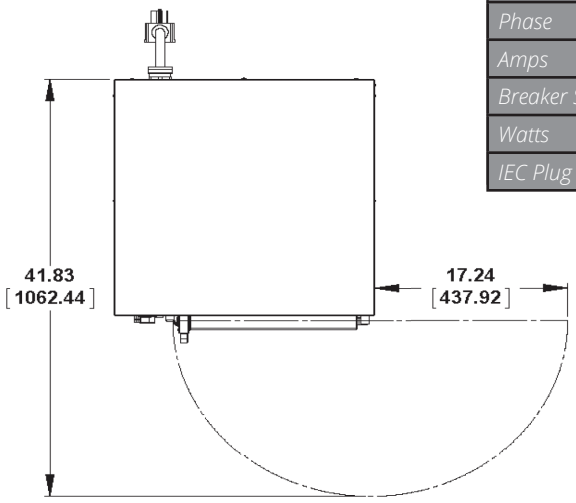

Notes:

1. Allow 3" between fryer, ranges, and other hot surfaces.
2. 5' power cord supplied with single or 3 phase.
3. For use on individual branch circuit only.
4. Do not connect to a circuit operating at more than 150V to ground.
5. Dimensions outside brackets are inches, in brackets are millimeters.

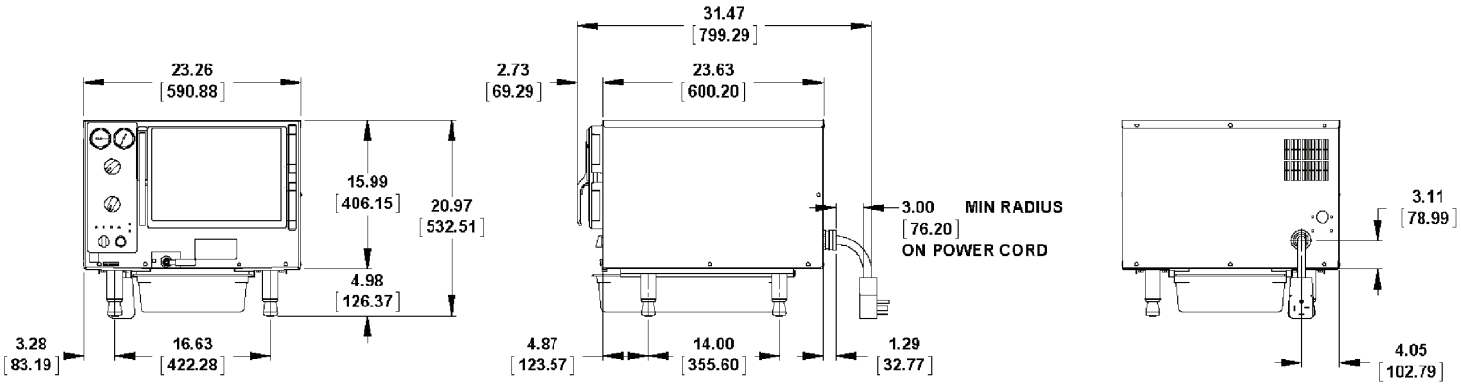

AccuTemp product may be covered by one or more US Patents. See www.accutempip.net

AccuTemp Products, Inc.
800-210-5907 | accutemp.net