



Warewashing Systems

DishStar[®] ADA-SEER

High Temperature Sanitizing Undercounter Dishwasher

- ADA-compliant. Overall height of 29³/₄" fits easily beneath 34" countertops
- Steam Elimination
- Energy Recovery System collects the hot water vapor inside the machine and uses it to preheat the incoming rinse water
- Operates on a single cold water connection
- Soft Start feature protects glassware
- Recirculating wash design with fresh water rinse
- Push button start with auto-fill
- Three selectable timed cycles for warewashing flexibility and performance
- Energy Saver Mode
- Delime cycle
- Built-in booster heater with exclusive Sani-Sure[™] final rinse system ensures proper rinse temperature
- Solid-state controls with digital LED displays
- Automatic pumped drain for both floor and wall drain installations
- Built-in chemical pumps with automatic prime
- Double-wall cabinet for quiet operation and reduced heat loss
- Powerful 1 HP stainless steel wash pump
- Door interlock comes standard



Clean the First Time[®] Performance!


- ADA-compliant
- Exceptional cleaning performance
- Operates on a cold water connection
- Virtually eliminates steam





DishStar® ADA-SEER

The DishStar ADA-SEER provides exceptional cleaning performance and high-temperature sanitizing while consuming only 0.60 gallons of water per rack. The Steam Elimination and Energy Recovery System collects the hot water vapor generated during the wash and rinse cycles and uses it to preheat the incoming rinse water. This allows the machine to operate from a cold water supply only, saving energy and reducing steam to improve the operator’s experience. Simple to operate with automatic fill, push button start, and three selectable cycles for Normal, Heavy, and Extra Heavy soil loads. Perfect for senior living centers, coffee shops, bars, quick service restaurants, small healthcare facilities, day care centers, and convenience stores.

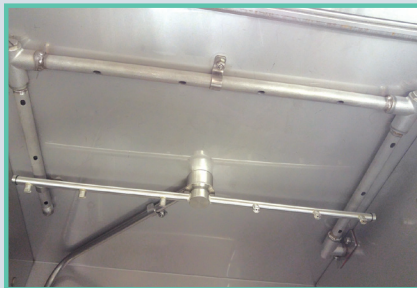

Halo Wash Arm



Top-mounted Controls



Interchangeable Scrap Baskets

OPERATING CYCLE TIMES (Seconds) | OPERATING CAPACITY (Racks per Hour)

OPERATING CYCLE	CYCLE TIME	RACKS PER HOUR	GALLONS PER HOUR
Normal	:145	24	14.40
Heavy	:213	16	9.60
Extra Heavy	:313	11	6.60

Contact Jackson

JAC-SS-0016 [07/20/23]

Address

6209 N U.S. Highway 25E
Gray, Kentucky 40734

Telephone & Fax

T 888.800.5672
F 606.523.1799

Email

customer.service@jacksonwws.com



JACKSONWWS.COM



JACKSON WAREWASHING SYSTEMS



JACKSON WWS

We reserve the right to change specifications in this document without incurring any obligation for equipment previously or subsequently sold.