

DynaTemp® with optional Ventless and Energy Recovery

Project _____
Item _____
Quantity _____
CSI Section 11400
Approval _____
Date _____

DynaTemp® with optional Ventless and Energy Recovery

Models

DynaTemp with optional Ventless and Energy Recovery



Standard Features

- Ventless: Does not require a hood
- Unique, two-pass Energy Recovery System
- Low profile internal condensing system minimizes water vapor
- Built-in booster heater with Sani-Sure™ final rinse system ensures proper rinse temperature
- Multi-cycle timer
- Digital controls
- Triple Wash Arm for consistent reliable warewashing performance
- Self-diagnosing digital controls diagnose most common issues and indicate what the issue is if something happens that affects the operation of the dishmachine
- Specially designed stainless steel nozzles provide superior cleaning action
- 17-1/4" (438 mm) door opening accepts 18" (457 mm) trays
- Interchangeable wash/rinse arms screw out for simple cleanup
- Built-in pressure regulator and door interlock are standard
- Auto-fill/auto-start
- Door switch
- Delime/manual wash switch
- Low watt density electric wash tank heater
- Hi-limit thermostat and low water protection
- Adjustable bullet feet
- Front and side dress panels
- Detergent/rinse additive signal connection fuse box
- Self-draining stainless steel pump
- Interchangeable scrap baskets

Mandatory Specs

Specify voltage _____

Options

- ☐ 480V Electrical
- ☐ Single Phase
- ☐ Drain Quench System
- ☐ Scaltrol
- ☐ Water Hammer Arrestor
- ☐ Flanged Feet
- ☐ Security Package

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack

Specifications

Uses 0.69 gallons (3 liters) of water per rack
Total automatic (normal) cycle - 88 seconds
39 racks per hour (normal) cycle
Built-in 70°F (38.9°C) rise booster heater on electric models
1 hp wash pump motor
Single point connections for all utilities

Cold water connection only

Field convertible from straight through to corner and vice versa

Field convertible from 3-phase to single-phase and vice versa

Durable stainless steel construction

Uses standard 20" X 20"
(508 mm X 508 mm) racks




Intertek



Intertek



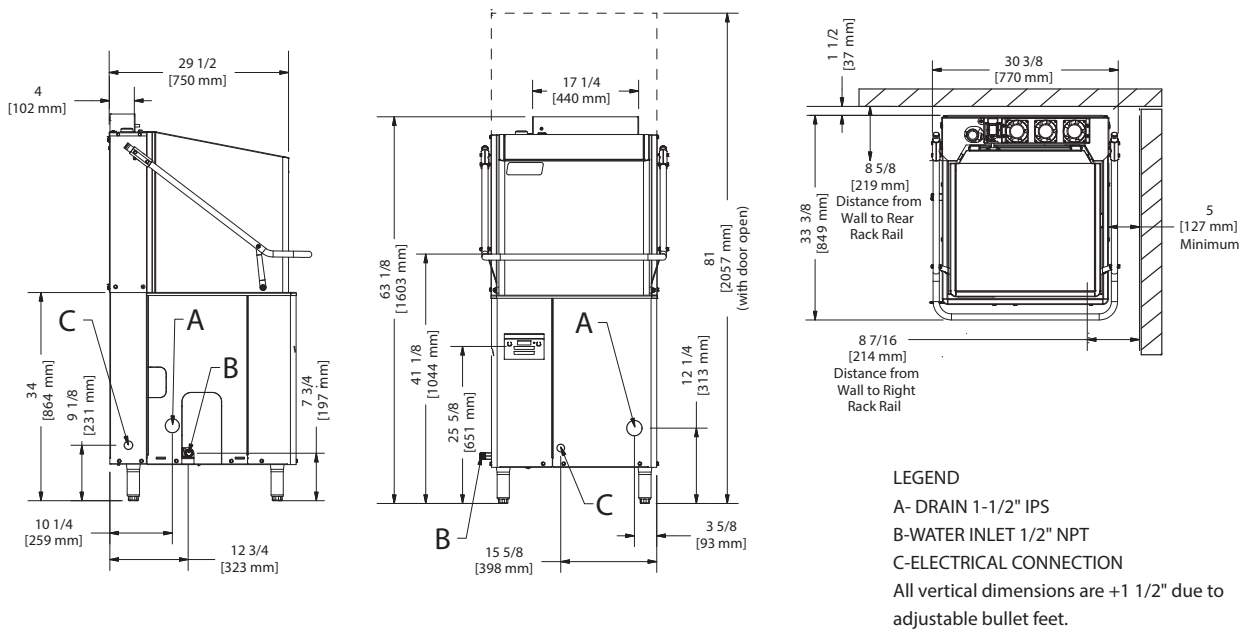

MODEL NO.	MACHINE DIMENSIONS				DRAIN HEIGHT	SHIPPING INFORMATION					
	HEIGHT	WIDTH	WIDTH BETWEEN TABLES	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
DynaTemp VER	63-1/8" (1604 mm)	30-5/16" (770 mm)	25-5/16" (643 mm)	29-1/2" (749 mm)	14-1/2" (368 mm)	420 lbs (191 kg)	150	55.34 cu. ft.	69" (1753 mm)	33" (838 mm)	42" (1067 mm)

DIMENSION REQUIREMENTS	
Wall Clearance - Rear (minimum)	1-1/4" (32 mm)
Wall Clearance - Corner Installation Side (minimum)	6-1/4" (159 mm)
Standard Table Height	34" (864 mm)
Inside Clearance	17-1/4" (438 mm)
Machine Height with Door Open	81" (2057 mm)

OPERATING CAPACITY			
Racks per Hour	Normal 39	Heavy 25	Extra Heavy 13

OPERATING CYCLE (seconds)					
	Wash	Rinse	Dwell	Condensate Removal	Total Cycle
Heavy	40	11	7	30	88
Normal	90	11	7	30	138
Extra Heavy	220	11	7	30	268

WASH PUMP MOTOR		
Wash Pump Motor Horsepower		1 HP
	Volts	KW
Electric Wash Tank Heater	208V	4.1
	230V	5.0
	460V	5.0
Electric Rinse Tank Heater - 70°F (38.9°C) Rise	208V	10.5
	230V	12.9
	460V	12.9

WATER REQUIREMENTS	
Inlet Temperature	40 - 90° F (4.4 - 32.2° C)
Gallons per Hour	26.91 gal (101.9 L)
Gallons per Rack	.69 gal (2.6 L)
Waterline Size IPS (minimum)	1/2"
Drainline Size IPS (minimum)	1- 1/2"
Operating Flow Pressure (PSI)	8
Flow Pressure Connection (PSI)	40
Wash Tank Capacity	8 gal (30 L)
Booster Tank Capacity	3 gal (11 L)

APPROXIMATE LOAD AMPS	
Power Supply	AMPS
208V/60HZ/1PH	75.8
208V/60HZ/3PH	46.3
230V/60HZ/1PH	83.6
230V/60HZ/3PH	50.7
460V/60HZ/3PH	24.1

OPERATING TEMPERATURES	
Wash (minimum)	150° F (66° C)
Rinse (minimum)	180° F (82° C)

HOW TO SPECIFY: DynaTemp with optional Ventless & Energy Recovery

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O.Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-41-23 [03/20/18]

www.jacksonwws.com