CLEVELAND

SHORT SERIES™ ELECTRIC KETTLES

34.8" RIM HEIGHT, STATIONARY, FULL STEAM JACKETED, SELF-CONTAINED, "SPLASH PROOF SERIES", 40 OR 60 GALLONS (150 OR 225 LITERS)

Project _____

Item _____

Quantity _____

FCSI Section 11400 _____

Approved _____

Date _____

Electric Kettles

Models

- KEL-40-SH
- KEL-60-SH



Short Form Specifications

Shall be Cleveland Electric Stationary Kettle, Model KEL-40SH, 34.8″ rim height, 3/4 steam jacketed, 50 psi steam jacket rating, Permanently filled Steam Jacket. Splash-Proof Solid-State Temperature Controls. 2″ Tangent Draw-Off Valve with Strainer, Spring-Assist Cover and Faucet Bracket. Splash Proof Solid State Temperature (±1° C) and Safety Control System in plug-in Module including L.E.D. indicators. 316 Stainless Steel Interior.

Standard Features

- Self-contained, easily installed - needs only an electrical hook-up
- Steam jacket filled with treated water, venting and/or refilling is not required
- Accurate, consistant solid state temperature controls (mechanical thermostate not as accurate) - less than ±1°C variance (ideal for simmering). Operating temperature range from 145° - 260°F (63°C - 127°C)

  Control panel includes:
  - LED indicator for heat cycle
  - LED indicator for low water
  - Power ON/OFF switch
  - Adjustable temperature control dial
- Water resistant controls, splash-proof construction
- Re-inforced rolled rim design prevents damage to kettle rim, eliminates "bar rim designs"
- Welded-in heating elements, (holds vacuum better, won't leak or loose water)
- Easily cleaned: kettle and all exterior surfaces are of type 304 stainless steel with an #4 finish
- Rear mounted easy access pressure gauge and pressure relief valve to prevent tampering. Color coded easy to read pressure gauge with "green" and "vent air zone"
- 50 psi steam jacket rating for higher cooking temperatures
- 50 psi safety valve
- Solid state water level control (no sight glass gauge to break or leak)
- Faucet mounting bracket
- 2″ diameter tangent draw-off valve with drain strainer
- Spring-assisted, hinged, rotatable, domed stainless steel cover
- 1 5/8″ O.D. tri-leg supports with level adjustable feet for floor bolting
- Standard voltage is 208-240 volts, 60 Hz, 3 Phase, 3-wire
- Typical approvals include UL., CSA, CE, NSF and ASME
- 316 Stainless Steel Interior

Options & Accessories

- 3" diameter Tangent Draw-Off Valve w/Strainer (TD3), for 60 gallon only
- Hot & Cold Water Faucet (DPK)
- Kettle Accessory Kit (KAK)
- Tri-Basket Strainer Support Systems (TBS)
- Kettles Markings (KM)
- Measuring Strips (MS)
- Voltages other than standard (VOS)
- Correctional Packages
- High Wattage (HW) (see back page)
- Heat Deflector Shield (HS001)
- Insulated Outer Jacket (IOJ)


KE004046-62

760 Beta Drive, Unit D
Mayfield Village, Ohio 44143

Tel 1.216.481.4900
Fax 1.216.481.3782
Email steam@clevelandrange.com

www.clevelandrange.com

WELBILT

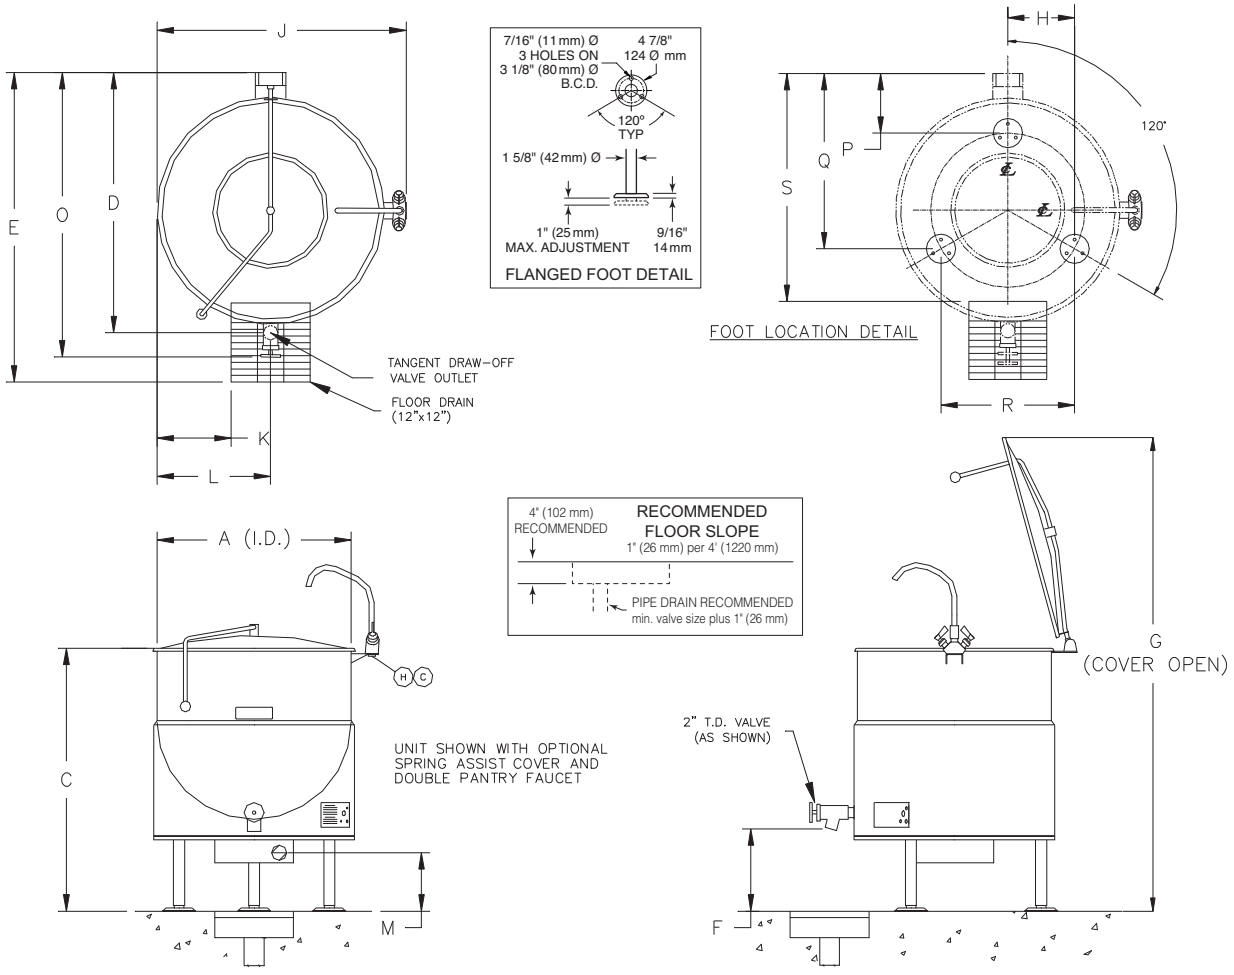

DIMENSIONS

GALS./ LITERS		A	C	D	E	F	G	H	J	K	L	M	O	P	Q	R
40/	IN	29 1/2	35 7/8	38	44	14	67 3/8	11 7/16	34 1/2	9 1/2	15 1/2	8 7/8	43	5 13/16	25 5/8	22 7/8
150	mm	750	911	965	1118	356	1712	291	876	242	394	225	1,092	148	651	582
60/	IN	33	35 7/8	41 1/4	47 1/4	10 1/4	72	12 15/16	38	11 1/4	17 1/4	6 3/4	46	5 9/16	28	25 7/8
225	mm	839	911	1048	1200	260	1829	329	965	286	439	171	1,168	141	711	65

WATER (H) (C)

⅜" O.D. copper tube or ½" N.P.T. pipe.

When ordered with optional faucet.

STANDARD WATTAGE

		208V			240V			415V			480V		
			AMPS	AMPS		AMPS	AMPS		AMPS	AMPS		AMPS	AMPS
GALS.	LITERS	KW	1PH	3PH	KW	1PH	3PH	KW	1PH	3PH	KW	1 PH	3PH
40	150	14.7	70.8	40.9	19.6	81.7	47.1	18.1	43.5	25.1	19.6	40.8	23.6
60	225	14.7	70.8	40.9	19.6	81.7	47.1	18.1	43.5	25.1	19.6	40.8	23.6

HIGH WATTAGE

		208V			240V			415V			480V		
			AMPS	AMPS		AMPS	AMPS		AMPS	AMPS		AMPS	AMPS
GALS.	LITERS	KW	1PH	3PH	KW	1PH	3PH	KW	1PH	3PH	KW	1 PH	3PH
40	150	29.4	N/A	81.7	39.2	N/A	94.3	39.2	81.7	47.1	30.2	79.4	45.9
60	225	29.4	N/A	81.7	39.2	N/A	94.3	39.2	81.7	47.1	30.2	79.4	45.9

Consult factory for other voltages.

SHIPPING WEIGHT (LBS.)

KEL-40-SH = 330
KEL-60-SH = 370

CLEARANCE

RIGHT = 0
LEFT = 0
REAR = 0

Allow 12" minimum on right side for servicing

- CAPACITIES:
  (in 8 oz. servings, other sizes may be calculated)
  40 Gallon / 150 liters ..... 640 servings
  60 Gallon / 225 liters ..... 960 servings

NOTES:
Cleveland Range reserves right of design improvement or modification, as warranted.
Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.
Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L/NSF#4 and CSA (AGA, CGA).

(NOT TO SCALE)

Electric Kettles