



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

## MILK COOLERS

### Model: SMF58HC-1-W-02

FORCED AIR / SINGLE ACCESS



## 7 YEAR WARRANTY Parts, Labor, and Compressor

### CABINET CONSTRUCTION

- White coated steel exterior
- Stainless steel interior
- Stainless steel lids, hinged doors and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder locks
- 6" Heavy-duty plate casters (2 with locks)
- Balanced, forced-air refrigeration system provides rapid chilling of product



### OPTIONS & ACCESSORIES

- Corner bumpers
- Cafeteria tray slides
- Graphics

### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Maintains product temperatures between 36°F to 40°F




# BEVERAGE-AIR®

## Milk Coolers Model: SMF58HC-1-W-02


PLAN VIEW

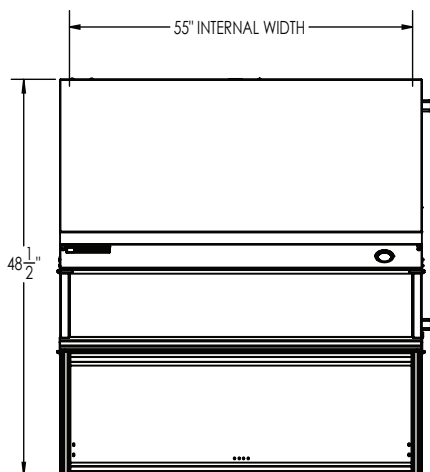

ELEVATION VIEW

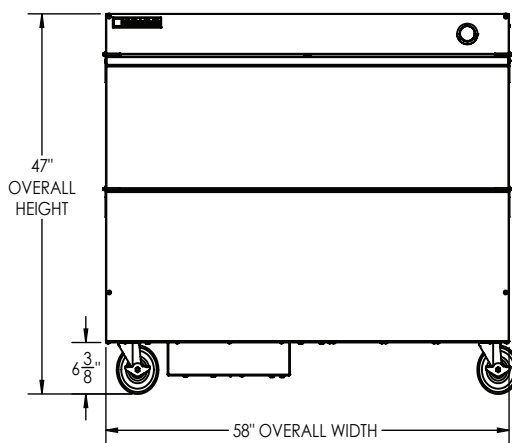

SIDE VIEW

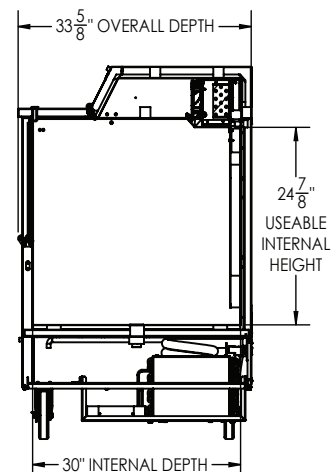

### EXTERNAL DIMENSIONAL DATA

|                               |               |
|-------------------------------|---------------|
| Width Overall (in)            | 58"           |
| Depth Overall (in)            | 33 5/8"       |
| Height Overall (in)           | 46 7/8"       |
| Number of Lids                | Single Access |
| Depth with Door open 90° (in) | 48 1/2"       |

### INTERNAL DIMENSIONAL DATA

|                               |         |
|-------------------------------|---------|
| NET Capacity (cubic ft.)      | 24      |
| Internal Width Overall (in)   | 55"     |
| Internal Depth Overall (in)   | 30"     |
| Internal Height Overall (in)  | 24 7/8" |
| Case Capacity 13" X 13" X 11" | 16      |
| Case Capacity 19" X 13" X 11" | 10      |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 4 3/8" bottom

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 2.46     |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                     |
|---------------------------|---------------------|
| Horsepower                | 1/4                 |
| Capacity (BTU/Hr)         | 1851                |
| Heat Rejection (BTU/Hr)   | 2776.5              |
| Charge (lbs/grams/ounces) | 0.1562 / 70.9 / 2.5 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 458 lbs. |
| Height - Crated (in)  | 48"      |
| Width - Crated (in)   | 61"      |
| Depth - Crated (in)   | 34"      |

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 3/26 | Printed in U.S.A.