CAMBRO

Camshelving® Premium Series

Stationary Starter & Add-On Units
4 or 5 Solid Shelves

HEIGHT	DEPTHS	LENGTHS	
1	3	8	
84"	18"	24"	48"
	21"	30"	54"
	24"	36"	60"
		42"	72"

- **Starter Units include:**
  2 factory assembled post kits, 8 or 10 shelf traverses and shelf plates.
- **Add-On Units include:**
  1 factory assembled post kit, 8 or 10 shelf traverses and shelf plates.

All 84" high units ship in separate post kits (unassembled) and shelf kits due to overall unit weight.

StoreSafe
camguard
ANTIMICROBIAL SHELF PLATES

Features & Benefits

- Designed for use in high-volume operations with constant loading of heavy products and frequent daily deliveries.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36˚ to 190˚F (-38˚ to 88˚C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised and space is maximized. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units. Unique patented design ensures maximum space utilization.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

Stationary Starter Unit

Stationary Add-On Unit

4 Shelf Unit Weight Bearing Chart

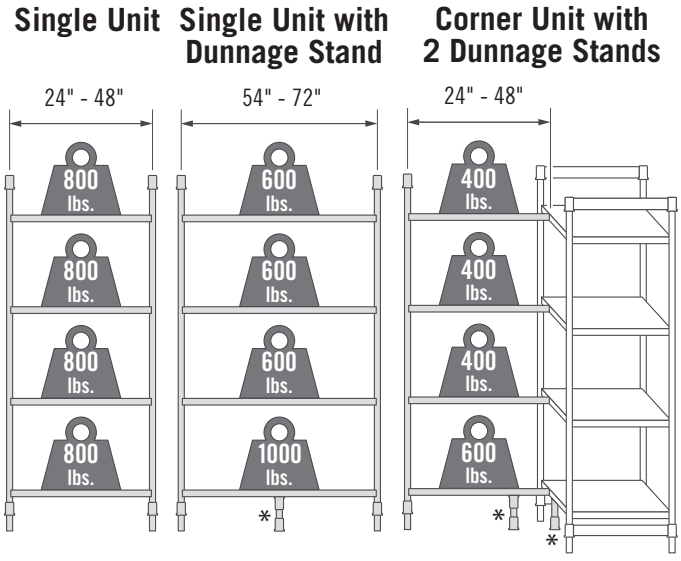

3200 lbs.	2800 lbs.	1800 lbs.
Maximum Unit Capacity	Maximum Unit Capacity	Maximum Unit Capacity

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

Approvals

NSF COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.

Telephone 714 848 1555 **Toll Free** 800 854 7631 **Customer Service** 800 833 3003 **Email:** customerservice@cambro.com

Printed in USA. REV. 08/16

Camshelving® Premium Series

Stationary Starter & Add-On Units
4 or 5 Solid Shelves

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

S4PKG
4-Shelf Solid Units

84"
HEIGHT

Starter



Add-On

	LENGTH	CODE	LENGTH	CODE
18" DEPTH	24"	CPU182484S4PKG	22¼"	CPA182484S4PKG
	30"	CPU183084S4PKG	28¼"	CPA183084S4PKG
	36"	CPU183684S4PKG	34¼"	CPA183684S4PKG
	42"	CPU184284S4PKG	40¼"	CPA184284S4PKG
	48"	CPU184884S4PKG	46¼"	CPA184884S4PKG
	54"	CPU185484S4PKG	52¼"	CPA185484S4PKG
	60"	CPU186084S4PKG	58¼"	CPA186084S4PKG
	72"	CPU187284S4PKG	70¼"	CPA187284S4PKG
21" DEPTH	24"	CPU212484S4PKG	22¼"	CPA212484S4PKG
	30"	CPU213084S4PKG	28¼"	CPA213084S4PKG
	36"	CPU213684S4PKG	34¼"	CPA213684S4PKG
	42"	CPU214284S4PKG	40¼"	CPA214284S4PKG
	48"	CPU214884S4PKG	46¼"	CPA214884S4PKG
	54"	CPU215484S4PKG	52¼"	CPA215484S4PKG
	60"	CPU216084S4PKG	58¼"	CPA216084S4PKG
	72"	CPU217284S4PKG	70¼"	CPA217284S4PKG
24" DEPTH	24"	CPU242484S4PKG	22¼"	CPA242484S4PKG
	30"	CPU243084S4PKG	28¼"	CPA243084S4PKG
	36"	CPU243684S4PKG	34¼"	CPA243684S4PKG
	42"	CPU244284S4PKG	40¼"	CPA244284S4PKG
	48"	CPU244884S4PKG	46¼"	CPA244884S4PKG
	54"	CPU245484S4PKG	52¼"	CPA245484S4PKG
	60"	CPU246084S4PKG	58¼"	CPA246084S4PKG
	72"	CPU247284S4PKG	70¼"	CPA247284S4PKG

Color: Speckled Gray (480).

S5PKG
5-Shelf Solid Units

Starter

Add-On



	LENGTH	CODE	LENGTH	CODE
	24"	CPU182484S5PKG	22¼"	CPA182484S5PKG
	30"	CPU183084S5PKG	28¼"	CPA183084S5PKG
	36"	CPU183684S5PKG	34¼"	CPA183684S5PKG
	42"	CPU184284S5PKG	40¼"	CPA184284S5PKG
	48"	CPU184884S5PKG	46¼"	CPA184884S5PKG
	54"	CPU185484S5PKG	52¼"	CPA185484S5PKG
	60"	CPU186084S5PKG	58¼"	CPA186084S5PKG
	72"	CPU187284S5PKG	70¼"	CPA187284S5PKG
	24"	CPU212484S5PKG	22¼"	CPA212484S5PKG
	30"	CPU213084S5PKG	28¼"	CPA213084S5PKG
	36"	CPU213684S5PKG	34¼"	CPA213684S5PKG
	42"	CPU214284S5PKG	40¼"	CPA214284S5PKG
	48"	CPU214884S5PKG	46¼"	CPA214884S5PKG
	54"	CPU215484S5PKG	52¼"	CPA215484S5PKG
	60"	CPU216084S5PKG	58¼"	CPA216084S5PKG
	72"	CPU217284S5PKG	70¼"	CPA217284S5PKG
	24"	CPU242484S5PKG	22¼"	CPA242484S5PKG
	30"	CPU243084S5PKG	28¼"	CPA243084S5PKG
	36"	CPU243684S5PKG	34¼"	CPA243684S5PKG
	42"	CPU244284S5PKG	40¼"	CPA244284S5PKG
	48"	CPU244884S5PKG	46¼"	CPA244884S5PKG
	54"	CPU245484S5PKG	52¼"	CPA245484S5PKG
	60"	CPU246084S5PKG	58¼"	CPA246084S5PKG
	72"	CPU247284S5PKG	70¼"	CPA247284S5PKG

Optional Accessories

- ❑ Corner Connector Sets
- ❑ Bottom Shelf Dunnage Stands (Low or Tall)
- ❑ Shelf Identification Tags
- ❑ Wall Fastener
- ❑ Seismic Foot
- ❑ Shelf Divider Panel
- ❑ Shelf Divider Bars (Straight or Angled)
- ❑ Shelf Rails (Single or Double)
- ❑ Tray Sliding Rack
- ❑ Single Shelf Security Cage
- ❑ Full Wrap Security Cage
- ❑ Shelf Traverses (Single or Double)
- ❑ Drying and Storage Cradles

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
Post Connectors: Reinforced polypropylene.
Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.
Corner Connectors: Reinforced nylon.
Adjustable Foot: Reinforced nylon.

Approvals

NSF COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
Telephone 714 848 1555 **Toll Free** 800 854 7631 **Customer Service** 800 833 3003 **Email:** customerservice@cambro.com
Printed in USA. REV. 08/16

D081602