



## Camshelving® Premium Series

### Stationary Starter & Add-On Units 4 or 5 Vented Shelves

| HEIGHT | DEPTHS | LENGTHS |     |
|--------|--------|---------|-----|
| 1      | 3      | 8       |     |
| 72"    | 18"    | 24"     | 48" |
|        | 21"    | 30"     | 54" |
|        | 24"    | 36"     | 60" |
|        |        | 42"     | 72" |

• **Starter Units include:**

2 factory assembled post kits, 8 or 10 shelf traverses and shelf plates.

• **Add-On Units include:**

1 factory assembled post kit, 8 or 10 shelf traverses and shelf plates.

All units ship complete in 1 box, except 72" long units which ship in kits (post kits are unassembled) due to overall unit weight.



#### Features & Benefits

- Designed for use in high-volume operations with constant loading of heavy products and frequent daily deliveries.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised and space is maximized. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units. Unique patented design ensures maximum space utilization.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10.2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_




Stationary Starter Unit



Stationary Add-On Unit

### 4 Shelf Unit Weight Bearing Chart

Single Unit    Single Unit with Dunnage Stand    Corner Unit with 2 Dunnage Stands

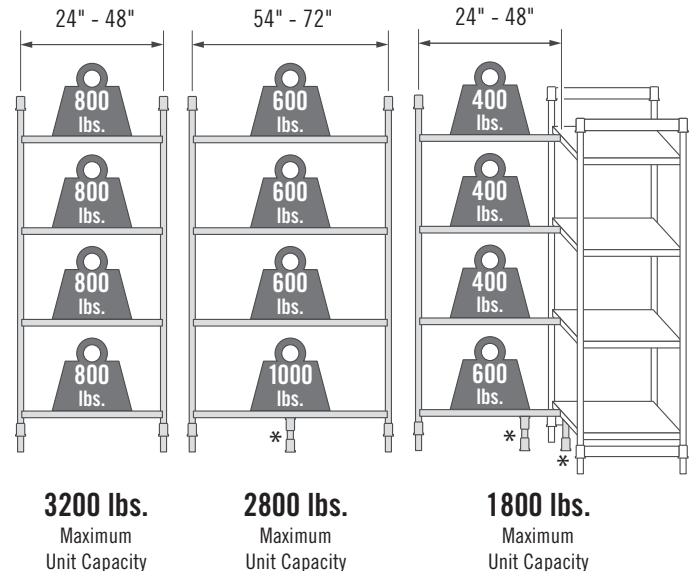

\* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

#### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Vented Shelves

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_



### V4

#### 4-Shelf Vented Units

Starter

Add-On

72"  
HEIGHT



18"  
DEPTH

| LENGTH | CODE           |
|--------|----------------|
| 24"    | CPU182472V4    |
| 30"    | CPU183072V4    |
| 36"    | CPU183672V4    |
| 42"    | CPU184272V4    |
| 48"    | CPU184872V4    |
| 54"    | CPU185472V4    |
| 60"    | CPU186072V4    |
| 72"    | CPU187272V4PKG |

| LENGTH | CODE           |
|--------|----------------|
| 22¼"   | CPA182472V4    |
| 28¼"   | CPA183072V4    |
| 34¼"   | CPA183672V4    |
| 40¼"   | CPA184272V4    |
| 46¼"   | CPA184872V4    |
| 52¼"   | CPA185472V4    |
| 58¼"   | CPA186072V4    |
| 70¼"   | CPA187272V4PKG |

21"  
DEPTH

|     |                |
|-----|----------------|
| 24" | CPU212472V4    |
| 30" | CPU213072V4    |
| 36" | CPU213672V4    |
| 42" | CPU214272V4    |
| 48" | CPU214872V4    |
| 54" | CPU215472V4    |
| 60" | CPU216072V4    |
| 72" | CPU217272V4PKG |

|      |                |
|------|----------------|
| 22¼" | CPA212472V4    |
| 28¼" | CPA213072V4    |
| 34¼" | CPA213672V4    |
| 40¼" | CPA214272V4    |
| 46¼" | CPA214872V4    |
| 52¼" | CPA215472V4    |
| 58¼" | CPA216072V4    |
| 70¼" | CPA217272V4PKG |

24"  
DEPTH

|     |                |
|-----|----------------|
| 24" | CPU242472V4    |
| 30" | CPU243072V4    |
| 36" | CPU243672V4    |
| 42" | CPU244272V4    |
| 48" | CPU244872V4    |
| 54" | CPU245472V4    |
| 60" | CPU246072V4    |
| 72" | CPU247272V4PKG |

|      |                |
|------|----------------|
| 22¼" | CPA242472V4    |
| 28¼" | CPA243072V4    |
| 34¼" | CPA243672V4    |
| 40¼" | CPA244272V4    |
| 46¼" | CPA244872V4    |
| 52¼" | CPA245472V4    |
| 58¼" | CPA246072V4    |
| 70¼" | CPA247272V4PKG |



Color: Speckled Gray (480).

### V5

#### 5-Shelf Vented Units

Starter

Add-On



| LENGTH | CODE           |
|--------|----------------|
| 24"    | CPU182472V5    |
| 30"    | CPU183072V5    |
| 36"    | CPU183672V5    |
| 42"    | CPU184272V5    |
| 48"    | CPU184872V5    |
| 54"    | CPU185472V5    |
| 60"    | CPU186072V5    |
| 72"    | CPU187272V5PKG |

| LENGTH | CODE           |
|--------|----------------|
| 22¼"   | CPA182472V5    |
| 28¼"   | CPA183072V5    |
| 34¼"   | CPA183672V5    |
| 40¼"   | CPA184272V5    |
| 46¼"   | CPA184872V5    |
| 52¼"   | CPA185472V5    |
| 58¼"   | CPA186072V5    |
| 70¼"   | CPA187272V5PKG |

|     |                |
|-----|----------------|
| 24" | CPU212472V5    |
| 30" | CPU213072V5    |
| 36" | CPU213672V5    |
| 42" | CPU214272V5    |
| 48" | CPU214872V5    |
| 54" | CPU215472V5    |
| 60" | CPU216072V5    |
| 72" | CPU217272V5PKG |

|      |                |
|------|----------------|
| 22¼" | CPA212472V5    |
| 28¼" | CPA213072V5    |
| 34¼" | CPA213672V5    |
| 40¼" | CPA214272V5    |
| 46¼" | CPA214872V5    |
| 52¼" | CPA215472V5    |
| 58¼" | CPA216072V5    |
| 70¼" | CPA217272V5PKG |

|     |                |
|-----|----------------|
| 24" | CPU242472V5    |
| 30" | CPU243072V5    |
| 36" | CPU243672V5    |
| 42" | CPU244272V5    |
| 48" | CPU244872V5    |
| 54" | CPU245472V5    |
| 60" | CPU246072V5    |
| 72" | CPU247272V5PKG |

|      |                |
|------|----------------|
| 22¼" | CPA242472V5    |
| 28¼" | CPA243072V5    |
| 34¼" | CPA243672V5    |
| 40¼" | CPA244272V5    |
| 46¼" | CPA244872V5    |
| 52¼" | CPA245472V5    |
| 58¼" | CPA246072V5    |
| 70¼" | CPA247272V5PKG |

### Optional Accessories

- ☐ Corner Connector Sets
- ☐ Bottom Shelf Dunnage Stands (Low or Tall)
- ☐ Shelf Identification Tags
- ☐ Wall Fastener
- ☐ Seismic Foot
- ☐ Shelf Divider Panel
- ☐ Shelf Divider Bars (Straight or Angled)
- ☐ Shelf Rails (Single or Double)
- ☐ Tray Sliding Rack
- ☐ Single Shelf Security Cage
- ☐ Full Wrap Security Cage
- ☐ Shelf Traverses (Single or Double)
- ☐ Drying and Storage Cradles

### Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.  
Post Connectors: Reinforced polypropylene.  
Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.  
Corner Connectors: Reinforced nylon.  
Adjustable Foot: Reinforced nylon.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

**CAMBRO**  
TRUSTED FOR GENERATIONS™  
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.  
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.  
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com  
Printed in USA. REV. 08/16

PS3

D081602