CAMBRO

Camshelving® Premium Series

Stationary Starter & Add-On Units
4 or 5 Vented Shelves

HEIGHT	DEPTHS	LENGTHS	
1	3	8	
64"	18"	24"	48"
	21"	30"	54"
	24"	36"	60"
		42"	72"

- **Starter Units include:**
  2 factory assembled post kits, 8 or 10 shelf traverses and shelf plates.
- **Add-On Units include:**
  1 factory assembled post kit, 8 or 10 shelf traverses and shelf plates.

All units ship complete in 1 box, except 72" long units which ship in kits (post kits are unassembled) due to overall unit weight.

StoreSafe
camguard
ANTIMICROBIAL SHELF PLATES

Features & Benefits

- Designed for use in high-volume operations with constant loading of heavy products and frequent daily deliveries.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36˚ to 190˚F (-38˚ to 88˚C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised and space is maximized. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units. Unique patented design ensures maximum space utilization.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

Stationary Starter Unit

Stationary Add-On Unit

4 Shelf Unit Weight Bearing Chart

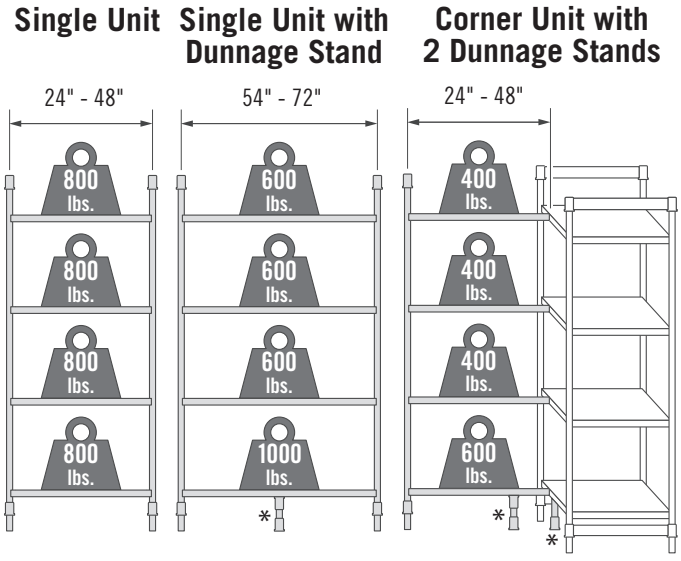

3200 lbs.	2800 lbs.	1800 lbs.
Maximum Unit Capacity	Maximum Unit Capacity	Maximum Unit Capacity

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

Approvals

NSF COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.

Telephone 714 848 1555 **Toll Free** 800 854 7631 **Customer Service** 800 833 3003 **Email:** customerservice@cambro.com

Printed in USA. REV. 08/16

Camshelving® Premium Series

Stationary Starter & Add-On Units
4 or 5 Vented Shelves

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

V4
4-Shelf Vented Units

64" HEIGHT



	Starter			Add-On	
	LENGTH	CODE		LENGTH	CODE
18" DEPTH	24"	CPU182464V4		22¼"	CPA182464V4
	30"	CPU183064V4		28¼"	CPA183064V4
	36"	CPU183664V4		34¼"	CPA183664V4
	42"	CPU184264V4		40¼"	CPA184264V4
	48"	CPU184864V4		46¼"	CPA184864V4
	54"	CPU185464V4		52¼"	CPA185464V4
	60"	CPU186064V4		58¼"	CPA186064V4
	72"	CPU187264V4PKG		70¼"	CPA187264V4PKG
21" DEPTH	24"	CPU212464V4		22¼"	CPA212464V4
	30"	CPU213064V4		28¼"	CPA213064V4
	36"	CPU213664V4		34¼"	CPA213664V4
	42"	CPU214264V4		40¼"	CPA214264V4
	48"	CPU214864V4		46¼"	CPA214864V4
	54"	CPU215464V4		52¼"	CPA215464V4
	60"	CPU216064V4		58¼"	CPA216064V4
	72"	CPU217264V4PKG		70¼"	CPA217264V4PKG
24" DEPTH	24"	CPU242464V4		22¼"	CPA242464V4
	30"	CPU243064V4		28¼"	CPA243064V4
	36"	CPU243664V4		34¼"	CPA243664V4
	42"	CPU244264V4		40¼"	CPA244264V4
	48"	CPU244864V4		46¼"	CPA244864V4
	54"	CPU245464V4		52¼"	CPA245464V4
	60"	CPU246064V4		58¼"	CPA246064V4
	72"	CPU247264V4PKG		70¼"	CPA247264V4PKG

Color: Speckled Gray (480).

V5
5-Shelf Vented Units



	Starter			Add-On	
	LENGTH	CODE		LENGTH	CODE
	24"	CPU182464V5		22¼"	CPA182464V5
	30"	CPU183064V5		28¼"	CPA183064V5
	36"	CPU183664V5		34¼"	CPA183664V5
	42"	CPU184264V5		40¼"	CPA184264V5
	48"	CPU184864V5		46¼"	CPA184864V5
	54"	CPU185464V5		52¼"	CPA185464V5
	60"	CPU186064V5		58¼"	CPA186064V5
	72"	CPU187264V5PKG		70¼"	CPA187264V5PKG
	24"	CPU212464V5		22¼"	CPA212464V5
	30"	CPU213064V5		28¼"	CPA213064V5
	36"	CPU213664V5		34¼"	CPA213664V5
	42"	CPU214264V5		40¼"	CPA214264V5
	48"	CPU214864V5		46¼"	CPA214864V5
	54"	CPU215464V5		52¼"	CPA215464V5
	60"	CPU216064V5		58¼"	CPA216064V5
	72"	CPU217264V5PKG		70¼"	CPA217264V5PKG
	24"	CPU242464V5		22¼"	CPA242464V5
	30"	CPU243064V5		28¼"	CPA243064V5
	36"	CPU243664V5		34¼"	CPA243664V5
	42"	CPU244264V5		40¼"	CPA244264V5
	48"	CPU244864V5		46¼"	CPA244864V5
	54"	CPU245464V5		52¼"	CPA245464V5
	60"	CPU246064V5		58¼"	CPA246064V5
	72"	CPU247264V5PKG		70¼"	CPA247264V5PKG

Optional Accessories

- ❑ Corner Connector Sets
- ❑ Bottom Shelf Dunnage Stands (Low or Tall)
- ❑ Shelf Identification Tags
- ❑ Wall Fastener
- ❑ Seismic Foot
- ❑ Shelf Divider Panel
- ❑ Shelf Divider Bars (Straight or Angled)
- ❑ Shelf Rails (Single or Double)
- ❑ Tray Sliding Rack
- ❑ Single Shelf Security Cage
- ❑ Full Wrap Security Cage
- ❑ Shelf Traverses (Single or Double)
- ❑ Drying and Storage Cradles

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
Post Connectors: Reinforced polypropylene.
Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.
Corner Connectors: Reinforced nylon.
Adjustable Foot: Reinforced nylon.

Approvals

NSF COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

Information and specifications are subject to change without notice. Please confirm at time of order.
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.

Telephone 714 848 1555 **Toll Free** 800 854 7631 **Customer Service** 800 833 3003 **Email:** customerservice@cambro.com

Printed in USA. REV. 08/16

D081602