



PROJECT: _____
 ITEM # _____ QTY: _____
 MODEL # _____
 AIA # _____ SIS # _____

CUBE ICE MAKER


CUBE ICE MAKER

CIM2046FR49



Features and Benefits

- Modular design for flexible application and easy installation on top of bins or dispensers.
- Easy to clean with front facing evaporator.
- Dishwasher safe plastic components (up to 180°F).
- Easy and quick cleaning reducing operating costs.
- Simple to service with many common parts across all CIM machines.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Electroless nickel plating on all evaporator plates ensures reliability and durability.
- Constructed from corrosion-resistant and fingerprint-proof aluminum.
- Pairs with RC406C49 remote condenser and precharged linesets: RL49-25, RL49-40, and RL49-75.



ICE FORMS	
FULL CUBE	7/8 x 7/8 x 7/8 in.
	22 x 22 x 22 mm

BIN CHART									
Model #	B40	B42	B55	B700-30	B110	B1000-48	B1300-48	B1325-60	B1660-60
capacity	344 lbs (156 kg)	351 lbs (160 kg)	510 lbs (232 kg)	680 lbs (308 kg)	854 lbs (388 kg)	1,000 lbs (454 kg)	1,320 lbs (599 kg)	1,325 lbs (601 kg)	1,660 lbs (753 kg)
width	30 in (762 mm)	22 in (559 mm)	30 in (762 mm)	30 in (762 mm)	48 in (1,219 mm)	48 in (1,219 mm)	48 in (1,219 mm)	60 in (1,524 mm)	60 in (1,524 mm)
Kit for combining wider bins with smaller models	Not Compatible	Not Compatible	Not Compatible	Not Compatible	Kit Not Required	Kit Not Required	Kit Not Required	Kit Not Required	Kit Not Required

See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.



CIM2046FR49 shown atop of bin B110 (sold separately)

Warranty

- Ice Maker: **3 Years Parts and Labor**
- Evaporator and Compressor: **5 Years Parts**
- Evaporator: **7 Years Parts and Labor** (if enrolled in the filter program for US & Canada)

Options & Accessories

- KSI-1 - Safe Ice Module
- KCUBEDISP for ice level control for a dispenser - verify adaptor with disp. manufacturer
- RC406C49 remote condenser

Water Filter

- Manifold System IFQ2-XL gets replacement filter IOMQXL (2)

11100 E. 45th Avenue • Denver, CO 80239

Phone: 1.866.PURE.ICE

www.iceomatic.com

Rev. 04/2026 Printed in U.S.A.

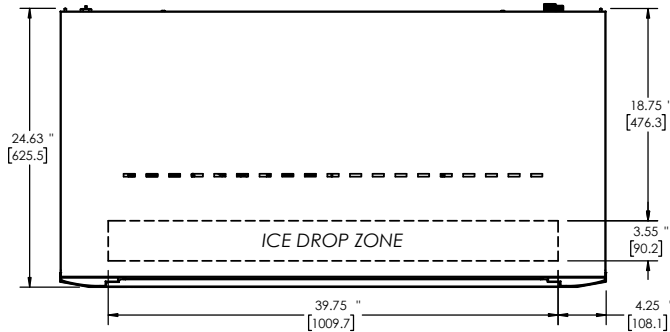
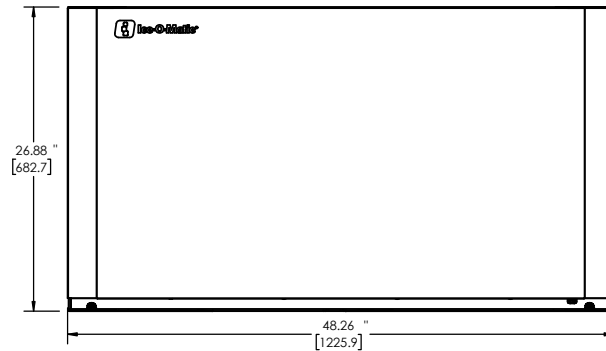
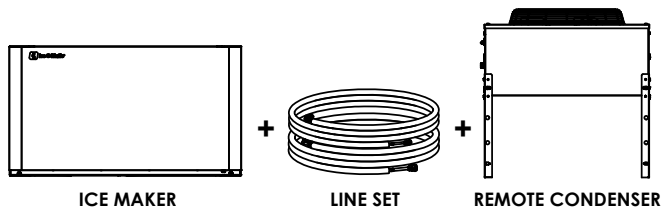
APPROVAL: _____ DATE: _____

**Ice-O-Matic**

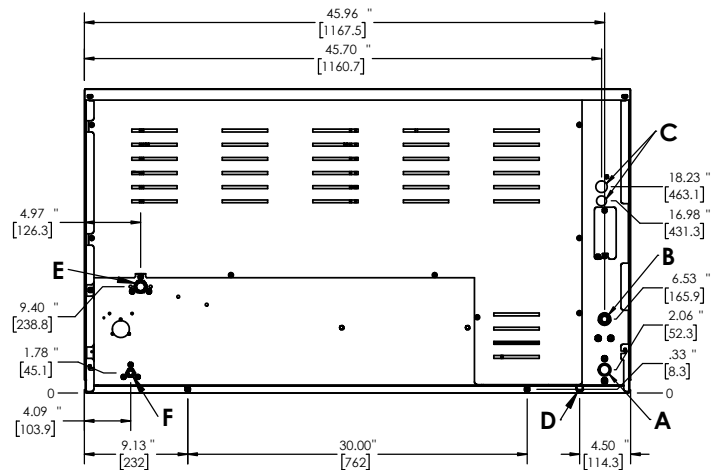
CUBE ICE MAKER

CIM2046FR49

Line drawing note: Numbers with quote symbol " are in inches. Numbers enclosed in [brackets] are in millimeters.

PLAN / TOP VIEW**ELEVATION / FRONT VIEW****UTILITIES / BACK VIEW****Remote Cooled**

- A. Ice Maker Drain, 3/4" FPT
- B. Ice Maker Potable Water Inlet, 3/8" FPT
- C. Electrical Connection, ϕ .875" [22.2] (2)
- D. Condensate Base Drain, ϕ .50" [12.7]
- E. Remote Condenser Discharge Line,
1/2" male quick connect for line set
- F. Remote Condenser Liquid Line,
3/8" male quick connect for line set

**SPECIFICATIONS**

Model	CIM2046FR49
Condensing Type	Remote
Voltage/Hertz/Phase	208-230/60/1
Min. Circuit Amp	22.5 A
Max Breaker Size	35 A
kWH per 100 lbs of ice at 70°F air / 50°F water	3.50
kWH per 100 lbs of ice at 90°F air / 70°F water	4.44
BTU (approx per hour)	29600
Number of Wires	3 (including ground)
Refrigerant	R449A
Refrigeration Charge	292 oz
Ice Production per 24 hrs	
70° air / 50° water lbs (kg)	90° air / 70° water lbs (kg)
1830 (830)	1502 (681)
Water Usage gallons per 100 lbs of ice 90°F air / 70°F water	
Potable	Condenser
15	N/A

OPERATING REQUIREMENTS

	MINIMUM	MAXIMUM
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)
Water Temp	40°F (4°C)	100°F (38°C)
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG (5.5 BAR)

DIMENSIONS

Unit Width	48.25 in.	1226 mm
Unit Depth	24.25 in.	616 mm
Unit Height	26.8 in.	681 mm
Shipping Weight	329 lbs / 149 kg	
Shipping Dimensions (in.)	51 (W) x 27 (D) x 33 (H)	
Shipping Dimensions (mm)	1295.4 (W) x 685.8 (D) x 838.2 (H)	