



# STEAMERS

## INTEK CONNECTIONLESS ELECTRIC MODEL XS

Table top connectionless steamer with a pan capacity of 6 (2.5" deep 12" x 20") or 4 (4" deep 12" x 20"). Unit must be capable of producing steam at 212°F with no water or drain connection required.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



### AVAILABLE MODELS:

- XS-208-8-1 (208V, 8kW, 1-Phase)
- XS-208-8-3 (208V, 8kW, 3-Phase)
- XS-208-10-3 (208V, 10kW, 3-Phase)
- XS-208-12-3 (208V, 12kW, 3-Phase)
- XS-240-8-1 (240V, 8kW, 1-Phase)
- XS-240-8-3 (240V, 8kW, 3-Phase)
- XS-240-12-3 (240V, 12kW, 3-Phase)
- XS-480-12-3 (480V, 12kW, 3-Phase)

### STANDARD FEATURES:

- Produces steam at 212°F with no water or drain connection
- Inverted flow forced convection technology
- Magnetic door switch turns off convection fan when door is open
- 60 minute electro-mechanical timer, 2 position ON/OFF selector switch, indicator lights for COOK, STANDBY, HEAT and LOW WATER
- Low water warning system with automatic shutdown control

### CONSTRUCTION:

- 14 gauge reinforced stainless steel cavity
- Two panel door with rugged 14 gauge stainless steel outer door
- Heavy refrigeration style door handle with magnetic latch
- Stainless steel wire racks positioned to support 1", 2.5", 4", or 6" deep pans
- Front mounted water reservoir manual drain line

### OPERATION:

- Inverted flow convection fan in cooking chamber
- NSF approved holding cabinet
- Open door while cooking
- Heating element external to compartment and not exposed to water
- 3 gallon capacity water reservoir

### WATER QUALITY REQUIREMENTS:

Containment	Water Supply
pH	7 to 9
Total Dissolved Solids (TDS)	30 to 60 ppm
Hardness	less than 60 ppm
Chlorine and Chloramine	less than .1 ppm
Chlorides	less than 30 ppm
Silica	less than 12 ppm
Undissolved Solids	less than 5 microns

In order to accurately choose the correct water treatment solution, a water quality test has to be performed. If a "Free Start-up" is requested, the ASA will perform a water quality test and Unified Brands (UB) will be able to suggest the best solution for your water quality. If it isn't, your local manufacturing representative can coordinate this for you.


After the "Free Start-up" is performed, UB will add an additional 1-year parts and labor warranty. If UB suggests a water treatment system, the system is purchased from UB, installed and maintained, water related service issues will be covered for the duration of the warranty period.

### OPTIONS/ACCESSORIES:

- Stainless Steel Support Stand
- Caster Kit for Support Stand
- Flanged Feet Kit for Support Stand
- Door Hinged Left
- Correction Package
- Trivet

### ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)

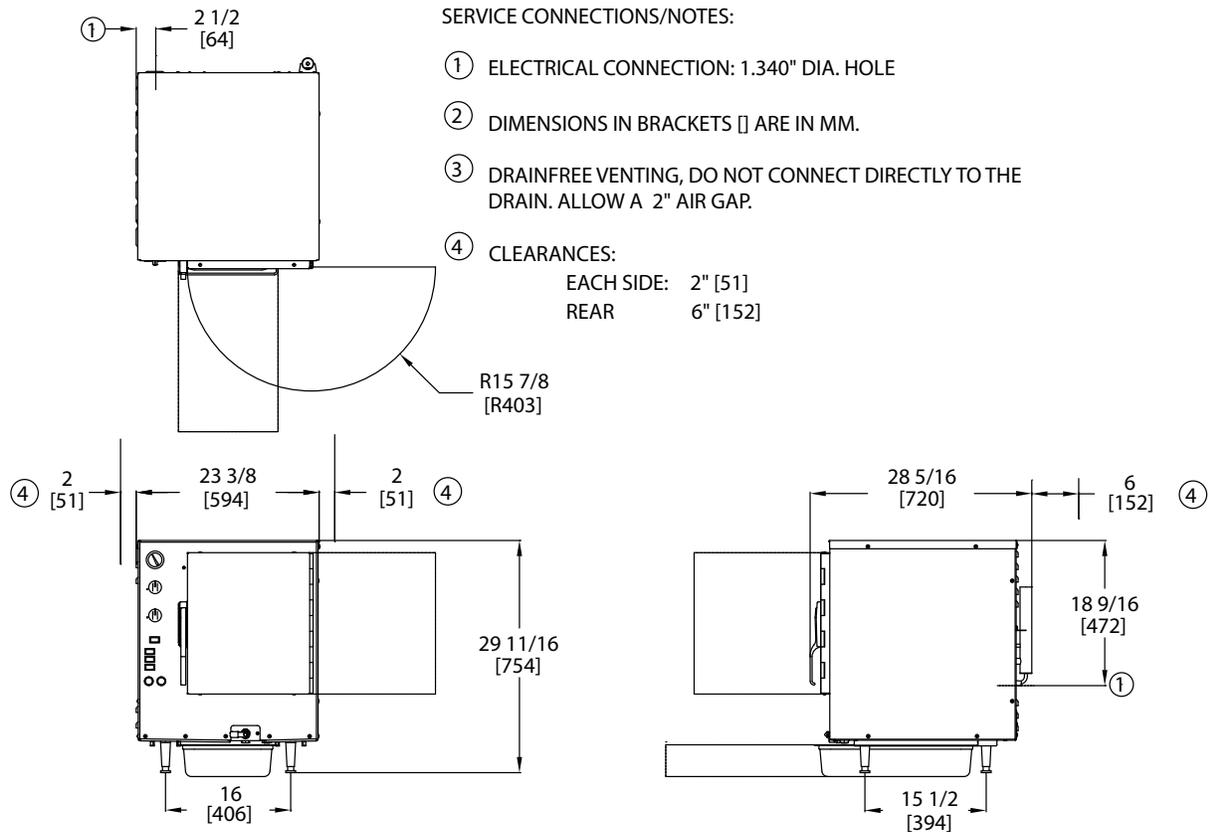


SERVICE CONNECTIONS/NOTES:


- ① ELECTRICAL CONNECTION: 1.340" DIA. HOLE
- ② DIMENSIONS IN BRACKETS [] ARE IN MM.
- ③ DRAINFREE VENTING, DO NOT CONNECT DIRECTLY TO THE DRAIN. ALLOW A 2" AIR GAP.
- ④ CLEARANCES:  
EACH SIDE: 2" [51]  
REAR 6" [152]

MODEL	NO. OF PANS	VOLTAGE	PHASE	KW MAX	AMP MAX	NEMA CONNECTOR NO.	CORD LENGTH FT [M]
XS-208-8-1	6	208	1	8	38.5	6-50P	7.5 (2.29)
XS-208-8-3	6	208	3	8	22	L15-30P (3PH)	8 (2.44)
XS-208-10-3	6	208	3	10	28	L15-30P (3PH)	8 (2.44)
XS-208-12-3	6	208	3	12	33.6	15-50P (3PH)	8 (2.44)
XS-240-8-1	6	240	1	8	33.4	6-50P	9 (2.74)
XS-240-8-3	6	240	3	8	19.4	L15-30P (3PH)	8 (2.44)
XS-240-12-3	6	240	3	12	29.1	L15-30P (3PH)	8 (2.44)
XS-480-12-3	6	480	3	12	14.6	L16-20P (3PH)	8 (2.44)


170944 STAND DIMENSIONS IN, [MM]			
CONFIGURATION	WIDTH	DEPTH	HEIGHT
WITH BULLET FEET	26 11/16 [678]	23 [584]	41 3/16 [1046]
WITH CASTORS	26 11/16 [678]	23 [584]	44 5/8 [1132]

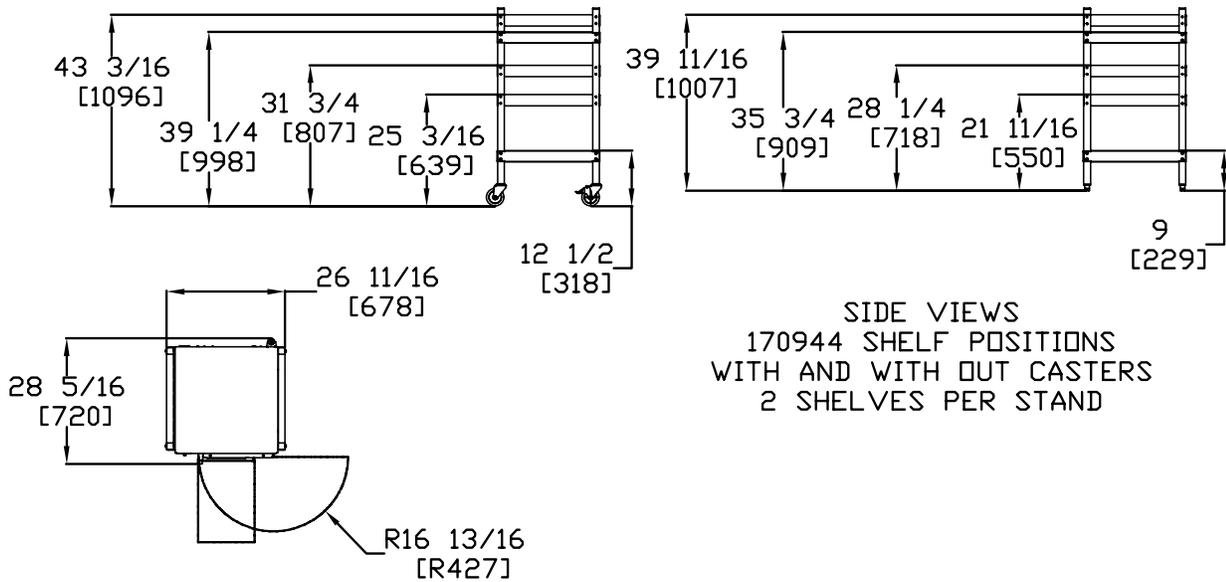


SIDE VIEWS  
170944 SHELF POSITIONS  
WITH AND WITHOUT CASTERS  
2 SHELVES PER STAND

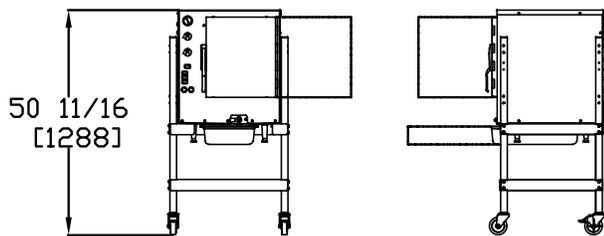


SINGLE XS ON 170944 STAND  
LOWEST SHELF WITH CASTORS

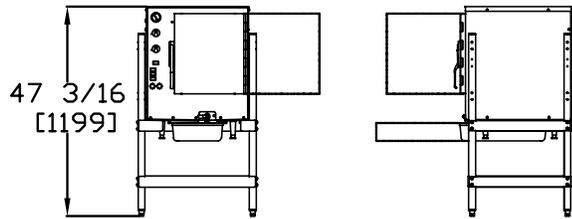

SINGLE XS ON 170944 STAND  
LOWEST SHELF WITHOUT CASTORS

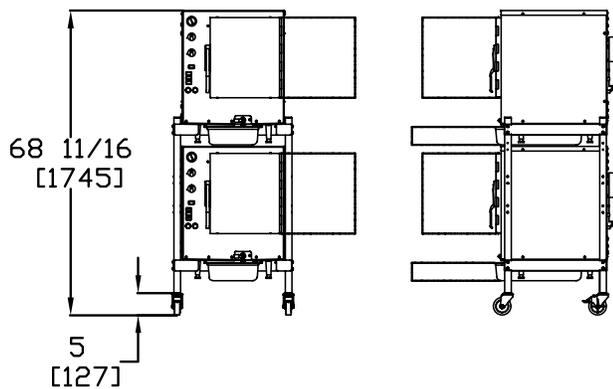

DOUBLE XS ON 170944 STAND  
WITH CASTORS

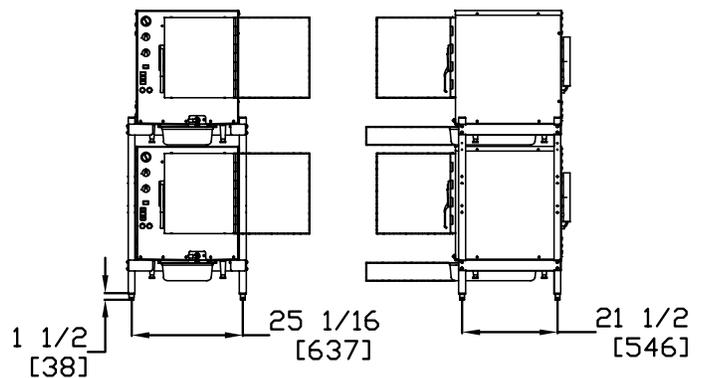

DOUBLE XS ON 170944 STAND  
WITHOUT CASTORS