



Project:

Item Number:

Quantity:

## Signature Server® Cold Food Stations with Stainless Steel Counters



All models are NSF 2 for sanitation. Refrigerated models have not been performance tested for potentially hazardous food.

### ITEMS

| Item No.   |        |              |             |
|------------|--------|--------------|-------------|
| Non-Refrig | Refrig | Width        | Height      |
| 37043      | 37045  |              | 34" (86 cm) |
| 36143      | 36145  | 46" (117 cm) | 30" (76 cm) |
| 36243      | 36245  |              | 27" (69 cm) |
| 37060      | 37065  |              | 34" (86 cm) |
| 36160      | 36165  | 60" (152 cm) | 30" (76 cm) |
| 36260      | 36265  |              | 27" (69 cm) |
| 37070      | 37075  |              | 34" (86 cm) |
| 36170      | 36175  | 74" (188 cm) | 30" (76 cm) |
| 36270      | 36275  |              | 27" (69 cm) |
| 98707      | 98708  | 88" (224 cm) | 34" (86 cm) |

### STANDARD FEATURES

- Vollrath's Signature Server® Cold Food Stations with Stainless Steel Counters are available in non-refrigerated and refrigerated models
- Reinforced stainless steel unibody construction provides extra durability in a lightweight, mobile base
- Base is 18-gauge 400 series stainless steel with applied black laminate
- Top is one-piece 18-gauge 300 series stainless steel
- Well constructed of 18-gauge 300 series stainless steel
- Foamed-in-place polyurethane insulation
- Uses R513A, a non-flammable low Global Warming Potential (GWP) refrigerant
- Drain hose and valve on operator side of base
- Heavy-duty 4" (10 cm) swivel casters with brakes
- 8 ft. (2.4 m) cord
- Refrigerated models have not been performance tested for potentially hazardous food.

**Note:** Signature Server® equipment orders cannot be canceled or returned.

### WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to [www.Vollrath.com](http://www.Vollrath.com).

### OPTIONS

#### BASE

- ☐ Black Laminate (Standard)
- ☐ Matte Laminate. Specify manufacturer/color: \_\_\_\_\_
- ☐ Wood Grain. Specify manufacturer/color: \_\_\_\_\_

- ☐ Stainless Steel
- ☐ Food Words Wrap ☐ Food Images Wrap
- ☐ Bubbles Wrap ☐ Checkerboard Wrap
- ☐ Toe Kick
- ☐ Electrical Outlet
- ☐ Line Locks

#### COUNTERTOP

- ☐ 18 Ga Stainless Steel (Standard)
- ☐ 14 Ga Stainless Steel
- ☐ Textured Stainless Steel

#### BREATH GUARD

See Breath Guard Spec Sheet.

#### For Stainless Steel Countertops Only

- ☐ Classic Cafeteria, Single Shelf ☐ NSF ☐ Stnd
- ☐ Classic Cafeteria, Dbl. Shelf ☐ NSF ☐ Stnd
- ☐ Classic Economy Buffet ☐ NSF ☐ Stnd
- ☐ Access® - Adjustable ☐ NSF ☐ Stnd
- ☐ Access® - Non-Adjustable ☐ NSF ☐ Stnd

#### Traditional Style

- ☐ Double-Sided Buffet ☐ NSF ☐ Stnd
- ☐ Single-Sided Buffet ☐ NSF ☐ Stnd
- ☐ Single-Sided Buffet w/ Shelf ☐ NSF ☐ Stnd
- ☐ Cafeteria with Top Shelf ☐ NSF ☐ Stnd
- ☐ Vertical Cafeteria ☐ NSF ☐ Stnd

#### Progressive Style

- ☐ Double-Sided Buffet ☐ NSF ☐ Stnd
- ☐ Single-Sided Buffet w/ Shelf ☐ NSF ☐ Stnd
- ☐ Single-Sided Buffet ☐ NSF ☐ Stnd
- ☐ Cafeteria with Top Shelf ☐ NSF ☐ Stnd

#### Contemporary Style

- ☐ Double-Sided Buffet ☐ NSF ☐ Stnd
- ☐ Single-Sided Buffet w/ Shelf ☐ NSF ☐ Stnd
- ☐ Single-Sided Buffet ☐ NSF ☐ Stnd
- ☐ Cafeteria with Top Shelf ☐ NSF ☐ Stnd

#### BREATH GUARD COLOR

##### Progressive and Traditional

- ☐ Gray Hammer (Progressive Only)
- ☐ Aluminum (Traditional Only)
- ☐ Chrome ☐ Brass Powder Coat
- ☐ Blk. 80% Gloss ☐ Blk. Hammer Semi-Gloss

##### Progressive and Traditional (Cont.)

- ☐ Copper Vein ☐ White Hammer
- ☐ Silver Vein ☐ Black/White

##### Contemporary

- ☐ Brushed ☐ Black 80% Gloss
- ☐ Stainless Steel ☐ Brass Powder Coat

#### LIGHTING

See Breath Guard Spec Sheet.

- ☐ Incandescent ☐ Fluorescent ☐ LED

#### ADDITIONAL CUSTOM OPTIONS

Contact Vollrath Representative.

#### EXTENDED WARRANTY

Contact Vollrath Representative for details.

### ACCESSORIES

See Signature Server Accessories Spec Sheet. Some options require a custom quote.

#### Plate Rest w/ Mounting Kit (Stainless Steel)

- ☐ Customer Side ☐ Plain ☐ Textured
- ☐ Operator Side ☐ Plain ☐ Textured

#### Tray Slide, V-rib (Stainless Steel)

- ☐ Customer Side ☐ 18 Ga ☐ 14 Ga
- ☐ Operator Side ☐ 18 Ga ☐ 14 Ga

#### Tray Slide, Tubular (Stainless Steel)

- ☐ Customer Side ☐ Operator Side

#### Cutting Board

- ☐ Maple Hardwood ☐ White Poly

#### End Shelf (Stainless Steel)

- ☐ Operator Left ☐ Operator Right
- ☐ Operator Left and Operator Right

#### False Bottom

- ☐ False Bottom

#### Storage Module

- ☐ With Doors ☐ Without Doors

#### Bag in Box

- ☐ Stainless Steel ☐ With Doors
- ☐ Galvanized ☐ Without Doors

#### Stationary Legs


- ☐ Adjustable 4-5" ☐ Adjustable 6-7"

| Approvals | Date |
|-----------|------|
|           |      |

Due to continued product improvement, please consult [www.vollrath.com](http://www.vollrath.com) for current product specifications.

# Signature Server® Cold Food Stations with Stainless Steel Counters

## DIMENSIONS (Shown in inches (cm))

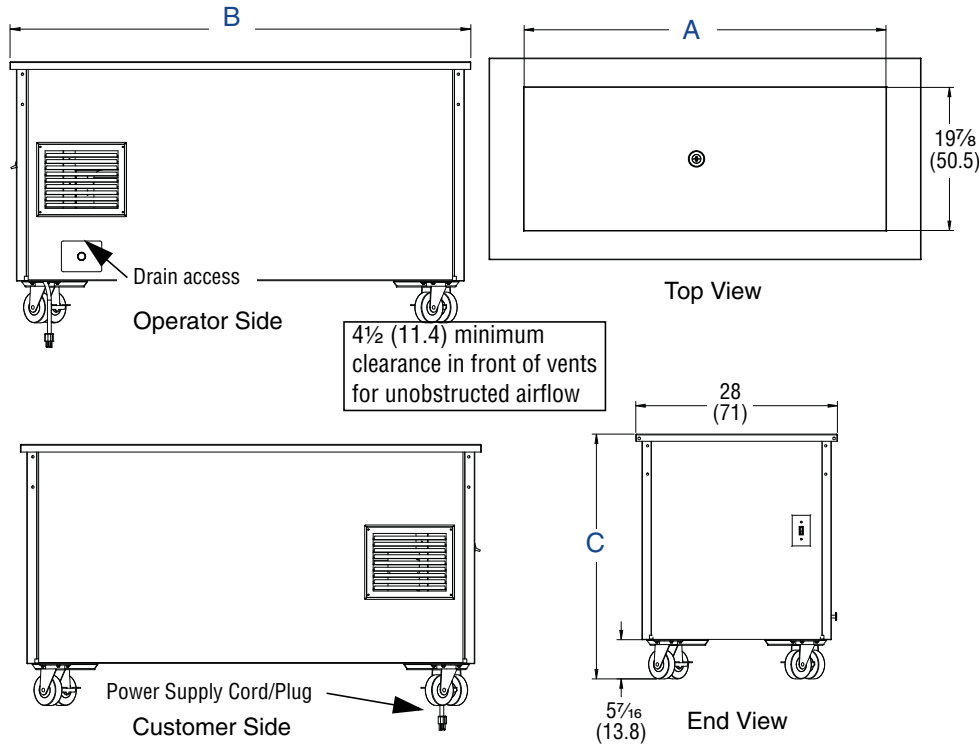


| Item No.      |        | (A)<br>Pan<br>Width | (B)<br>Overall<br>Width | (C)<br>Height |
|---------------|--------|---------------------|-------------------------|---------------|
| Non<br>Refrig | Refrig |                     |                         |               |
| 37043         | 37045  | 37 5/8<br>(95.5)    | 46<br>(117)             | 34 (86)       |
| 36143         | 36145  |                     |                         | 30 (76)       |
| 36243         | 36245  |                     |                         | 27 (69)       |
| 37060         | 37065  | 50 3/8<br>(127.9)   | 60<br>(152)             | 34 (86)       |
| 36160         | 36165  |                     |                         | 30 (76)       |
| 36260         | 36265  |                     |                         | 27 (69)       |
| 37070         | 37075  | 63 1/8<br>(160.3)   | 74<br>(188)             | 34 (86)       |
| 36170         | 36175  |                     |                         | 30 (76)       |
| 36270         | 36275  |                     |                         | 27 (69)       |
| 98707         | 98708  | 75 7/8<br>(192.7)   | 88<br>(224)             | 34 (86)       |
| -             | -      |                     |                         | 30 (76)       |
| -             | -      |                     |                         | 27 (69)       |

For breath guard and accessory dimensions, see the breath guard and accessory spec sheets on [vollrath.com](http://vollrath.com)

## NON-REFRIGERATED ELECTRICAL SPECIFICATIONS

| Overall<br>Width<br>IN (CM) | Base<br>Unit<br>Voltage | Lighting     | Length/ Total Amps |             |             |             | Plug          |
|-----------------------------|-------------------------|--------------|--------------------|-------------|-------------|-------------|---------------|
|                             |                         |              | 46<br>(117)        | 60<br>(152) | 74<br>(188) | 88<br>(224) |               |
| All<br>widths               | 120                     | Fluorescent  | 0.3                | 0.5         | 0.5         | 0.6         | NEMA<br>5-15P |
|                             |                         | Incandescent | 1.3                | 1.3         | 2.0         | 2.0         |               |
|                             |                         | None         | -                  | -           | -           | -           |               |


### Receptacle



## REFRIGERATED ELECTRICAL SPECIFICATIONS

| Overall<br>Width<br>IN (CM) | Base Unit<br>Voltage | Comp<br>(HP) | Peak Heat of<br>Rejection<br>(BTUH) | Refrig.<br>Charge (OZ) | Lighting     | Total<br>Amps | Plug          |
|-----------------------------|----------------------|--------------|-------------------------------------|------------------------|--------------|---------------|---------------|
| 46<br>(117)                 | 120                  | 1/5          | 2800                                | 7                      | Fluorescent  | 4.1           | NEMA<br>5-15P |
|                             |                      |              |                                     |                        | Incandescent | 5.1           |               |
|                             |                      |              |                                     |                        | None         | 3.8           |               |
| 60<br>(152)                 |                      | 1/5          | 2800                                | 7                      | Fluorescent  | 8.1           |               |
|                             |                      |              |                                     |                        | Incandescent | 9.1           |               |
|                             |                      |              |                                     |                        | None         | 7.8           |               |
| 74<br>(188)                 |                      | 1/3          | 4800                                | 7.5                    | Fluorescent  | 8.1           |               |
|                             |                      |              |                                     |                        | Incandescent | 9.8           |               |
|                             |                      |              |                                     |                        | None         | 7.8           |               |
| 88<br>(224)                 |                      |              |                                     | 8                      | Fluorescent  | 8.1           |               |
|                             |                      |              |                                     |                        | Incandescent | 9.8           |               |
|                             |                      |              |                                     |                        | None         | 7.8           |               |

### Receptacle



[www.vollrath.com](http://www.vollrath.com)

**The Vollrath Company, L.L.C.**  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Main Tel: 800.624.2051 or 920.457.4851  
Main Fax: 800.752.5620 or 920.459.6573  
Customer Service: 800.628.0830

Technical Services  
[techservicereps@vollrathco.com](mailto:techservicereps@vollrathco.com)  
Induction Products: 800.825.6036  
Countertop Warming Products:  
800.354.1970  
All Other Products: 800.628.0832