The Vollrath Company, L.L.C.

YOLLRATH

Project:

Item Number:

Quantity:

CONVECTION OVENS







CO4-208240FS

DESCRIPTION

Vollrath® Convection Ovens offer the perfect opportunity for food-service operators to break into the fresh-baked market or expand existing menus. Units are ideally suited for dough, pastries, and cakes. Use with pre-made frozen products to achieve fresh-baked sales with high speed and minimal fuss.

These units are perfect for small restaurants, bars, and coffee shops to bake, defrost, warm, and reheat a wide variety of fresh and frozen products. From cookies, muffins, cake, bread, biscuits, and pizza—to steak, hamburgers, and sandwiches, these are some of the most-versatile ovens on the market.

AGENCY LISTINGS





Classified by UL

WARRANTY

All models shown come with a Vollrath® standard warranty against defects in materials and workmanship. For full warranty details, please refer to vollrathfoodservice.com.

Due to continued product improvement, please consult vollrathfoodservice.com for current product specifications.

ITEMS


Item	Model	Description							
CO4-120HS	COV-120-HS	Half-Size Sheet Pans with Broil, 120V							
CO4-208240HS	COV-208240-HS	Half-Size Sheet Pans with Broil, 208–240V							
CO4-208240FS	COV-208240-FS	Full-Size Sheet Pans with Steam, 208–240V							

FEATURES & BENEFITS

- Stainless steel components are durable and easy to clean.
- 150-550 °F (66-288 °C) range allows product variety.
- · 120-minute timer turns heaters off after baking.
- Continuous-On function provides constant heat.
- Stainless steel shelves are included.
- · Improved hinge lasts longer.
- · Oven door is easily removed for cleaning.
- Half-size models offer a broil function for additional versatility.
- · Full-size units feature steam control for browning and crisping.
- CO4-120HS is the perfect size for portable catering.
- Dual, self-reversing fans in FS units promote uniform cooking.
- · Improved gaskets enhance heat retention.
- Low-profile lights provide more space for pans and food.
- Unit is approved for zero clearance on sides and back.
- Based on independent UL testing, this product complies with NFPA96 for ventless operation using the EPA202 test method.
 Ventless operation is dependent upon AHJ (Authority Having Jurisdiction) approval.
- Ventless operation allows location flexibility and space saving.
- 4' (1.2 m) cord with plug on HS models and 6' (1.8 m) cord with plug on FS models allow placement options.

CLEARANCE & ENVIRONMENT

- Install unit adjacent to non-combustibles in a flat location.
- Ensure unit is level to avoid damage during operation.
- Ambient temperatures must be at or below 104 °F (40 °C).
- To avoid damage, plug the unit into a properly grounded electrical supply that matches the nameplate rating.
- · NOTICE: Ovens cannot be stacked.

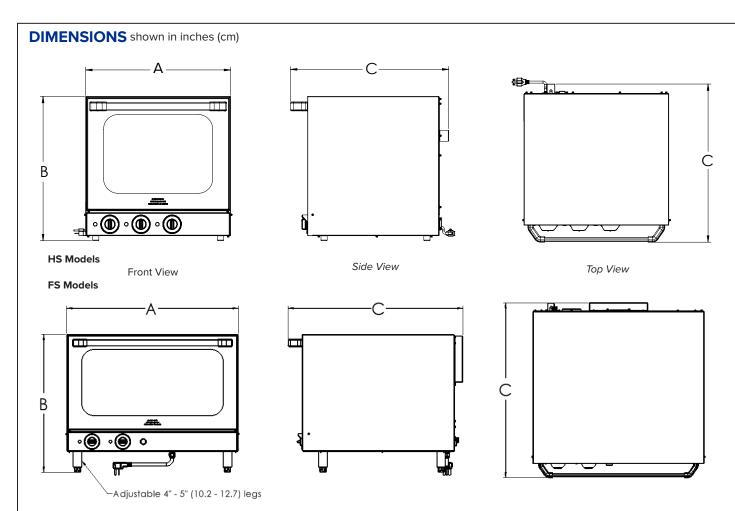

SPECIFICATIONS

Item	Description	Shelves	Overall Dimensions in. (cm)		Cooking Chamber in. (cm)		Volts	Watts	A	Shipping Weight & Dimensions (Including Pallet)			Plug (Included) &			
			Width A	Height B	Depth C	Width	Height	Depth	VOILS	watts	Amps	Weight lb (kg)	w	н	D	Receptacle
CO4-120HS	Half-Size 120V	3	2351/16	18 ⁷ / ₁₆ (46.7)		18 %	9 ⁷ / ₁₆ (23.9)	14½ (36.7)	120	1440	12.0	111 (50.3)	281/4	25%	- 30½	NEMA 5-15P & R
CO4- 208240HS	Half-Size 208-240V	4	(59.2)	23½ (58.9)		(47.1)	13 ¹³ / ₁₆ (35.0)	14 ⁹ / ₁₆ (36.9)	208-	2061– 2744	9.9– 11.4	127 (57.6)		301/8		NEMA 6-15P & R
CO4- 208240-FS	Full Size 208-240V	4	32 % (83.5)	26 ⁷ / ₁₆ (67.1)	33½ (85.1)	27 ¹ / ₁₆ (70.3)	13 ¹³ / ₁₆ (35.0)	191/8 (48.5)	240	4330– 5760	20.8– 24	192 (87:1)	39¾ (100)	32½ (84.5)	38 ³ / ₁₆ (97.0)	NEMA 6-30P & R



The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573 Customer Service: 800.628.0830

Canada Customer Service: 800.695.8560

Technical Services

techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832