



## COMMERCIAL DRINK DISPENSERS

**MODEL:** ☐ OSD10 ☐ OSD20 ☐ OSD30



OSD10




OSD20



OSD30

### ELECTRIC

120V / 50-60Hz / 1Ph  
(220V / 50-60Hz / 1Ph is an available option)  
NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Omega's OSD High Performance Drink Dispensers represent the ideal way to present drink products to your customer. Designed with space savings in mind, our drink dispensers provide the highest level of performance in the minimum amount of space. A continuous circulating rotary system keeps the product fresh and perfectly consistent each and every time it is served. Constructed of durable stainless steel and high-impact plastics, our dispensers are built to withstand daily fast-paced environments. Three models/sizes are offered to meet of your specific application needs.

### FEATURES AND CONSTRUCTION


- Continuous rotary agitator for enhanced product consistency and appearance
- Durable clear polycarbonate 3 gallon bowls with reinforced dispenser arm tabs
- Stainless steel cooling cylinder, frame, and front panel
- Removable drip trays for easy cleaning
- Upgraded counterweight fluid pin assembly for superior dispensing performance
- Rotating agitator paddles with magnetic overload protection prevent jamming that could impact dispenser performance

### CAPACITY

|             |                          |
|-------------|--------------------------|
| OSD10 ..... | One (1) 3-gallon bowl    |
| OSD20 ..... | Two (2) 3-gallon bowls   |
| OSD30 ..... | Three (3) 3-gallon bowls |



# COMMERCIAL DRINK DISPENSERS

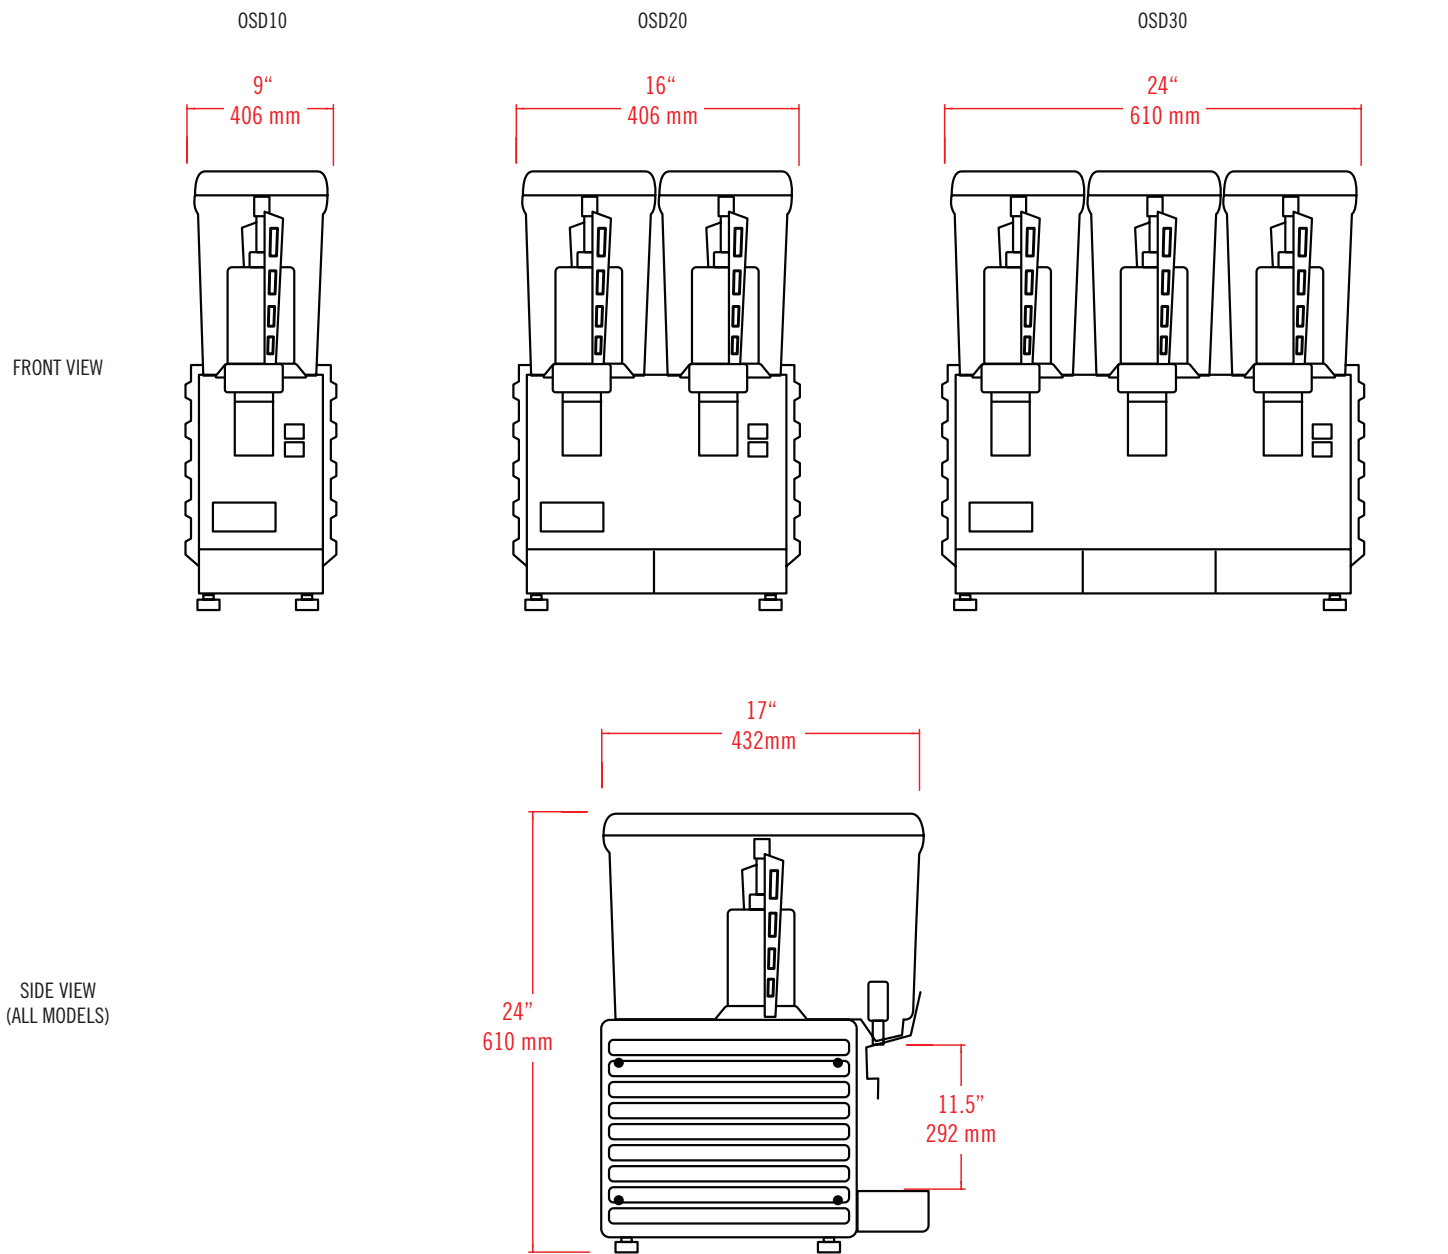

| MODEL | EXTERNAL DIMENSIONS                   | BOWLS / CAPACITY            | WATTAGE | HP     | REFRIGERANT AND CHARGE SIZE | ELECTRICAL           | SHIPPING WEIGHT |
|-------|---------------------------------------|-----------------------------|---------|--------|-----------------------------|----------------------|-----------------|
| OSD10 | 9" x 17" x 24"<br>406 x 432 x 610 mm  | One (1)<br>3-gallon bowl    | 385W    | 1/5 HP | R-134a<br>3.18 oz (90 g)    | 120V / 50-60Hz / 1Ph | 42 lbs (19 kg)  |
| OSD20 | 16" x 17" x 24"<br>406 x 432 x 610 mm | Two (2)<br>3-gallon bowls   | 672W    | 1/4 HP | R-134a<br>6.35 oz (180 g)   | 120V / 50-60Hz / 1Ph | 69 lbs (31 kg)  |
| OSD30 | 24" x 17" x 24"<br>610 x 432 x 610 mm | Three (3)<br>3-gallon bowls | 960W    | 1/3 HP | R-134a<br>7.40 oz (210 g)   | 120V / 50-60Hz / 1Ph | 86 lbs (39 kg)  |

## INSTALLATION

- Installation of included legs is strongly recommended to provide adequate space for cleaning underneath the machine to meet sanitation requirements.