



Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



COMMERCIAL  
REFRIGERATION

## G-SERIES - R290

### 3-Section Refrigerator Reach-In Self-Contained Hinged Glass Door(s)



(Shown with solid doors)



Many models are ENERGY STAR® listed. Please refer to [www.energystar.gov](http://www.energystar.gov) to view the most up-to-date product listing and performance data.



**Intertek**  
4004142  
Certified to UL STD. 471  
Cert. to CAN/CSA STD. C22.2 NO.120

This unit is listed to the applicable UL, CSA and NSF Standards by an approved NRTL. Consult the factory or unit's data plate for approval information.

## AVAILABLE CONFIGURATIONS

### Half-Height Door Models

G32000-032  
G32001-032  
G32002-032  
G32003-032

### Hinging

Left/Right/Right  
Left/Left/Right  
Right/Right/Right  
Left/Left/Left

### Full-Height Door Models

G32010-032  
G32011-032  
G32012-032  
G32013-032

### Hinging

Left/Right/Right  
Left/Left/Right  
Right/Right/Right  
Left/Left/Left

## STANDARD PRODUCT FEATURES

- High Performance, Energy Efficient Refrigeration System
- Reliable Microprocessor Control With LED Temperature Display
- Evaporator Coil Outside Food Zone Provides More Usable Space
- Load-Sure Guard Prevents Problems From Improper Loading
- Durable All-Metal Construction
- Stainless Steel Front & Louver Panel, Triple Pane Glass Doors, Anodized Aluminum Sides & Interior
- Full or Half Height Length Hinged Glass Doors With Locks
- Long Life EZ-Clean Door Gaskets
- Three (3) Epoxy Coated Shelves Per Section (factory installed)
- Easy to Maintain Front Facing Condenser Coil
- 6" High Locking Casters
- Guaranteed for Life Door Hinges
- 3-Year Parts & Labor Warranty
- 2-Years Additional Compressor Parts Warranty

## ACCESSORIES & OPTIONS (\*field installed)

- ▣ Tray Slides for 18" x 26" Sheet Pans\*
- ▣ Tray Slides for 12" x 20" Food Pans\*
- ▣ Tray Slides for 14" x 18" Sheet Pans\*
- ▣ Additional Shelves\*
- ▣ 6" High Legs\*

\*Please refer to form number TR35872 for precise kit details. See back page for tray slide versatility chart.

DEALERS CHOICE G-SERIES - R290




Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_



## MODELS

Half Height Door Models: G32000-032, G32001-032,  
G32002-032, G32003-032

CLICK  
**TRANSFER**  
For KCL CADalog Website

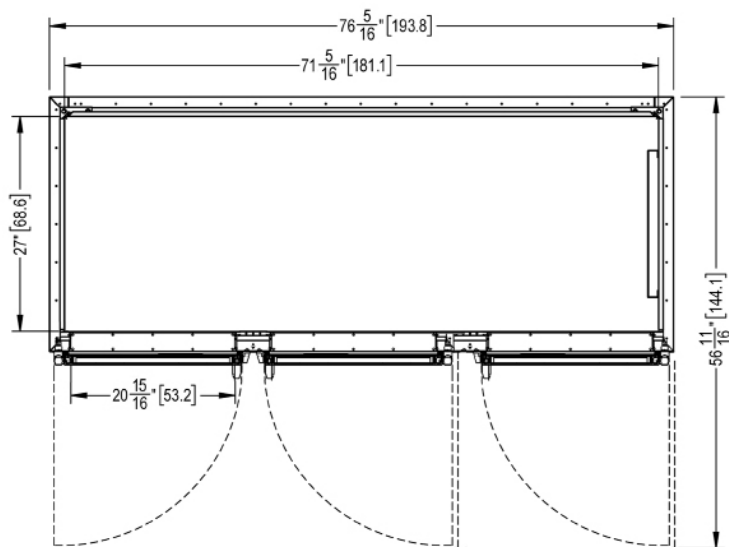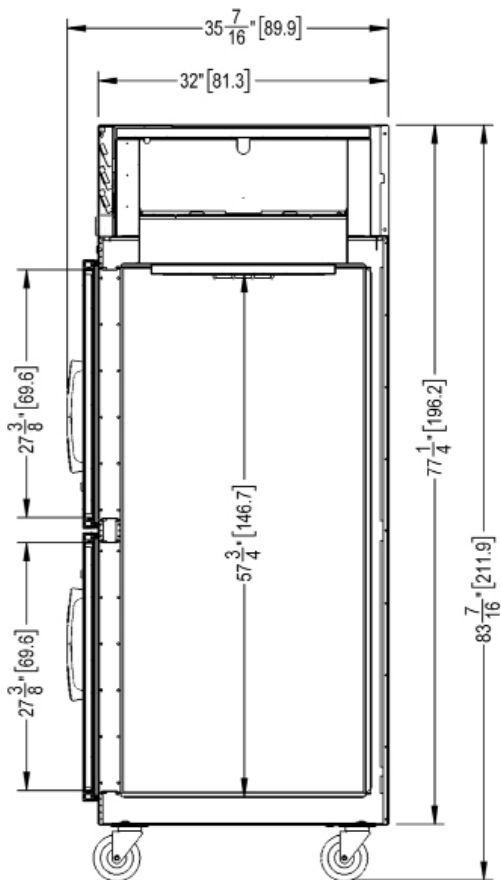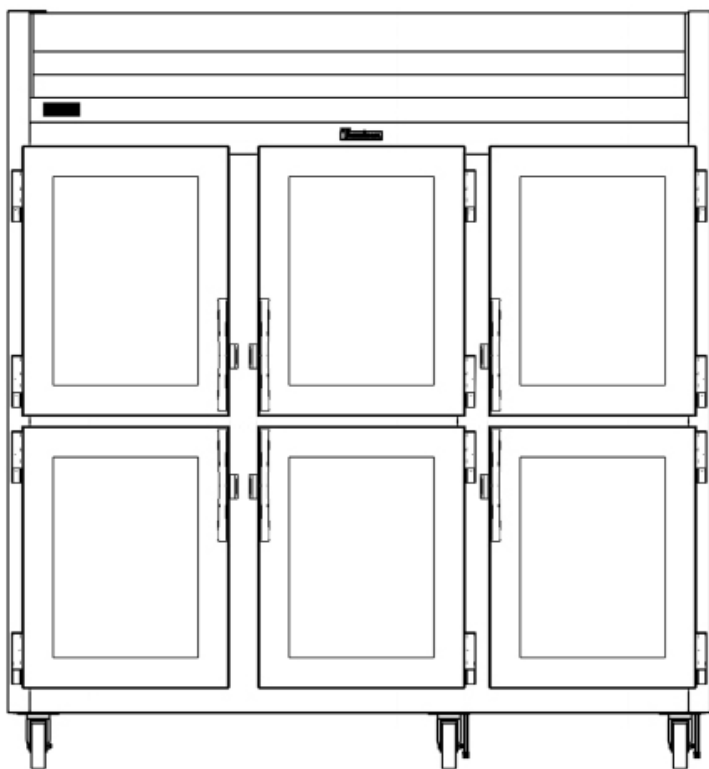




# G-SERIES - R290

## 3-Section Refrigerator Reach-In Self-Contained Hinged Glass Door(s)

### MODELS

Full Height Door Models: G32010-032, G32011-032,  
G32012-032, G32013-032

CLICK  
**TRANSFER**  
For KCL CADalog Website

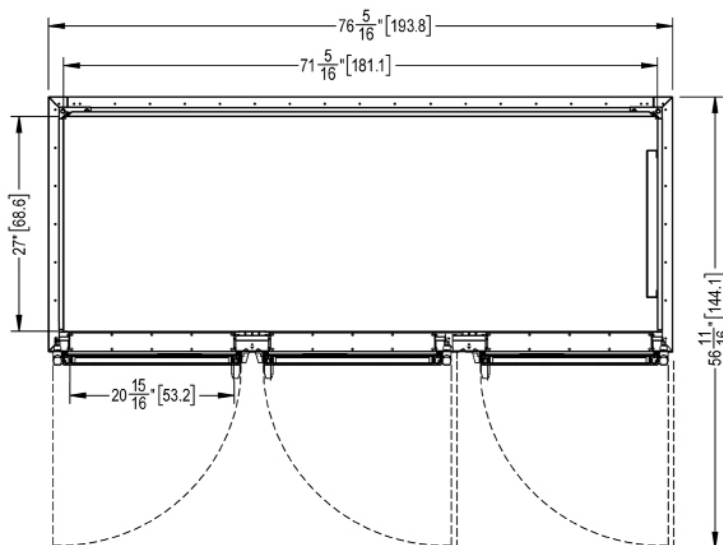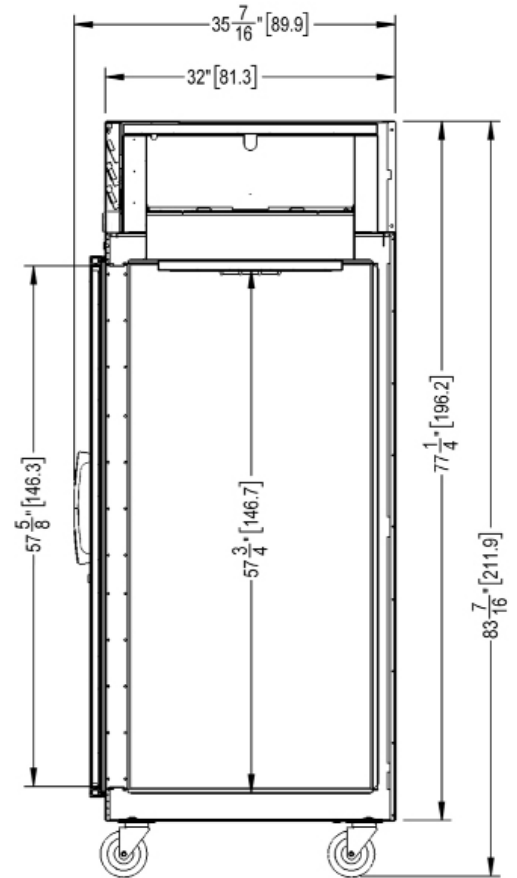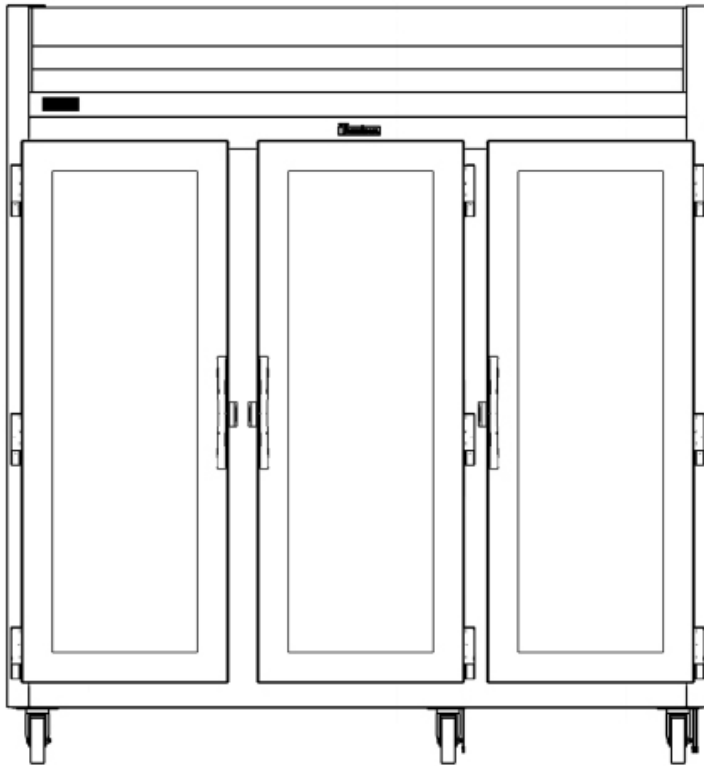



# G-SERIES - R290

## 3-Section Refrigerator Reach-In

### Self-Contained Hinged Glass Door(s)

## MODELS

Half Height Door Models: G32000-032, G32001-032, G32002-032, G32003-032

Full Height Door Models: G32010-032, G32011-032, G32012-032, G32013-032

| MODELS                                            | G320__-032                                                                                             |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>DIMENSIONAL DATA</b>                           |                                                                                                        |
| Net Capacity cu. ft. <sup>1</sup>                 | 70.07 (1984 l)   70.67 (2001 l)                                                                        |
| L x D x H <sup>1</sup> - Overall in. <sup>2</sup> | 76 <sup>5</sup> / <sub>16</sub> (193.8 cm) x 35 (88.8 cm) x 83 <sup>7</sup> / <sub>16</sub> (211.9 cm) |
| Depth - over body in.                             | 32 (81.3 cm)                                                                                           |
| Depth - door open 90° in.                         | 56 <sup>5</sup> / <sub>16</sub> (144.5 cm)                                                             |
| Clear half-door W x H in.                         | 21 <sup>1</sup> / <sub>8</sub> (53.6 cm) x 27 <sup>1</sup> / <sub>2</sub> (69.9 cm)                    |
| Clear full-door W x H in.                         | 21 <sup>1</sup> / <sub>8</sub> (53.6 cm) x 57 <sup>5</sup> / <sub>8</sub> (146.3 cm)                   |
| No. Standard Shelves                              | 9                                                                                                      |
| Shelf Area sq. ft. <sup>3</sup>                   | 51.9 (4.82 sq m)                                                                                       |
| <b>ELECTRICAL DATA</b>                            |                                                                                                        |
| Voltage   Plug                                    | 115/60/1   NEMA 5-15P (attached)                                                                       |
| Feed wires with ground                            | 3                                                                                                      |
| Full Load Amperes   MDEC <sup>4</sup>             | 10.7   7.47 kWh/Day                                                                                    |
| <b>REFRIGERATION DATA</b>                         |                                                                                                        |
| Refrigerant                                       | R-290                                                                                                  |
| Refrigerant Charge Amt. oz                        | 5.29 oz (150 g) per condensing unit <sup>6</sup>                                                       |
| BTU/HR   H.P. <sup>5</sup>                        | 4040   5/8 HP                                                                                          |
| Required Clearance                                | 12" Above                                                                                              |
| <b>SHIPPING DATA</b>                              |                                                                                                        |
| L x D x H Crated in.                              | 91(231 cm) x 42 (107 cm) x 85 (216 cm)                                                                 |
| Volume Crated cu. ft.                             | 188 (5324 l)                                                                                           |
| Uncrated   Crated Weight (lbs.)                   | 581 (264 kg)   666 (302 kg)                                                                            |

### NOTES:

1. Net Capacity cu. ft. = Half Height Door | Full Height Door models.
2. Height shown when mounted on standard 6" high casters.
3. Figure shown reflects the area of standard shelf complement.
4. MDEC = Maximum Daily Energy Consumption
5. Based on a 90°F ambient and 20°F evaporator.
6. Three(3) section models have two(2) condensing units.

| OPTIONAL ACCESSORY TRAY SLIDE VERSATILITY CHART |                                                                                                                                          |                                                        |                                                                                                                                                                    |                                                                    |                                                                            |                                                                        |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------------------------------------------|
| TRAY SLIDE DRAWINGS                             |                                                                                                                                          |                                                        |                                                                                                                                                                    |                                                                    |                                                                            |                                                                        |
| TRAY SLIDE OFFERING                             | #1<br>(1) 18" x26" or (2) 14"x18"                                                                                                        | #4 (Rod Type)<br>(1) 18" x26"                          | Universal<br>(1) 18" x26" or (2) 14"x18" or (2) 12"x20"                                                                                                            | #1 EZ-Change<br>(1) 18" x26" or (2) 14"x18"                        | Universal EZ-Change<br>(1) 18" x26" or (2) 14"x18" or (2) 12"x20"          | HD Universal EZ-Change<br>(1) 18" x26" or (2) 14"x18" or (2) 12"x20"   |
| SPACING CAPACITY DOOR SIZE                      | 2" 28 Pairs Full Door & 13 Half<br>3" 19 Pairs Full Door & 09 Half<br>4" 14 Pairs Full Door & 07 Half<br>5" 11 Pairs Full Door & 05 Half | 1 1/2" 38 Pairs Full Door<br>1 1/2" 18 Pairs Half Door | 4" 14 Pairs Full Door & 06 Half <sup>1</sup><br>4" 14 Pairs Full Door & 07 Half <sup>2</sup><br>5" 11 Pairs Full Door & 05 Half<br>6" 09 Pairs Full Door & 04 Half | 2" 26 Pairs Full Door & 12 Half<br>4" 13 Pairs Full Door & 06 Half | 2 1/4" 22 Pairs Full Door & 11 Half<br>4 1/2" 11 Pairs Full Door & 05 Half | 4 1/2" 11 Pairs Full Door & 05 Half<br>9" 05 Pairs Full Door & 02 Half |

- Upper Half Height Door<sup>1</sup>
- Lower Half Height Door<sup>2</sup>

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.

## EQUIPMENT SPECIFICATIONS

### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front and louver assembly are constructed of heavy gauge stainless steel. Cabinet sides (including returns) and interior are constructed of anodized aluminum. The exterior cabinet top, back and bottom are constructed of heavy gauge galvanized steel. A set of four (4) 6" high casters are included.

Doors are equipped with removable plug cylinder locks and guaranteed for life cam-lift, gravity action, self-closing metal, glide hinges with stay open feature at 120 degrees. An exterior mounted switch is provided to operate the interior LED lighting. Each door includes a vertically mounted stainless steel handle.

Gasket profile and durable long life material simplify cleaning and increase overall gasket life. Anti-condensate heaters are located behind each door opening.

The cabinet is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

### SELF-CONTAINED REFRIGERATION SYSTEM

A top mounted, self-contained, balanced refrigeration system using environmentally friendly, R-290 refrigerant is conveniently located behind the one piece louver assembly. It features an easy to clean front facing condenser, thermostatic expansion valve, air-cooled hermetic compressor, large, high humidity evaporator coil located outside the food zone and a top mounted non-electric condensate evaporator. A 9' cord and plug is provided. Standard operating temperature is 34 to 38°F.

### CONTROL

The easy to use water resistant microprocessor control system is supplied standard. It includes a 3-Digit LED Display, and a Fahrenheit or Celsius Temperature Scale Display Capability.

### INTERIOR ARRANGEMENTS

Standard interior arrangements include three (3) epoxy coated steel wire shelves, mounted on shelf pins, installed at the factory. Recommended load limit per shelf should not exceed 225 lbs.

### DOMESTIC WARRANTY

Both a three year parts and labor warranty and an additional two year compressor parts warranty (for a total of five on self-contained models) are provided standard.