



Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

## UPT SERIES

### Compact Sandwich Prep Tables with Raised Cover/Self-Contained



### STANDARD PRODUCT FEATURES

- High Quality Stainless Steel Exterior Top, Sides & Doors
- Durable, Corrosion Resistant Anodized Aluminum Interior
- Provides NSF Standard 7 Performance, Even With 6" Deep Pans
- Standard Work Height 34 $\frac{3}{8}$ " on 4" casters
- Environmentally Friendly R-290 Refrigerant
- Top Cut-Outs Accommodate Sixth Size Pans (divider bars and 4" deep plastic sixth size pans provided)
- Reinforced Pan Ledge (holds pans securely level)
- Removable Stainless Steel Insulated Pan Cover & Pivoting Lid
- Reversible, Full Length White Nylon Cutting Board
- Self-Closing Stainless Steel Doors with Stay-Open Feature at 105 Degrees
- Electronic Control
- Two (2) Powder Coated Steel Shelves Per Door, Mounted on Adjustable Pilasters
- Set of Four (4) 4" Casters
- Magnetic Snap-In EZ-Clean™ Door Gasket(s)



Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

### ACCESSORIES & OPTIONS (\*field installed)

- CK20 (four 6" (15.2 cm) high casters for 27" models)
- CK24 (four 3 $\frac{1}{2}$ " (8.9 cm) high casters for 27" models)
- CK26 (four 2 $\frac{3}{4}$ " (6.9 cm) high casters for 27" models)
- CK28 (four 2 $\frac{1}{2}$ " (6.4 cm) high casters for 27" models)
- LK4 (four 6" (15.24 cm) high legs for 27" models)
- Shelf CPW1 (additional shelf for 27" models)
- Optional accessory kits shipped separately for field installation

### AVAILABLE CONFIGURATIONS

#### 27" Wide Models

| Model    | Model Type           | Hinging |
|----------|----------------------|---------|
| UPT276-L | 27" Wide 6 Pan Model | Left    |
| UPT276-R | 27" Wide 6 Pan Model | Right   |
| UPT279-L | 27" Wide 9 Pan Model | Left    |
| UPT279-R | 27" Wide 9 Pan Model | Right   |


### FACTORY INSTALLED OPTIONS

- Stainless Steel Finished Back (model numbers will have '-SB' suffix)


**- GUARANTEED FOR LIFE WORKFLOW DOOR HANDLES**

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_


**MODEL:**  
UPT276-L

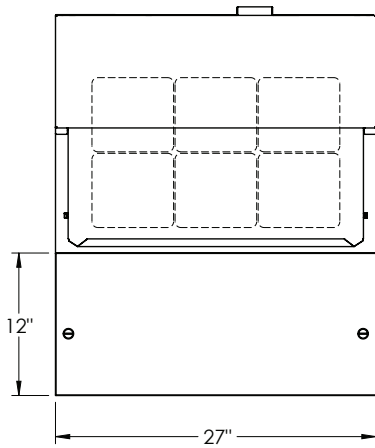

**TOP VIEW**

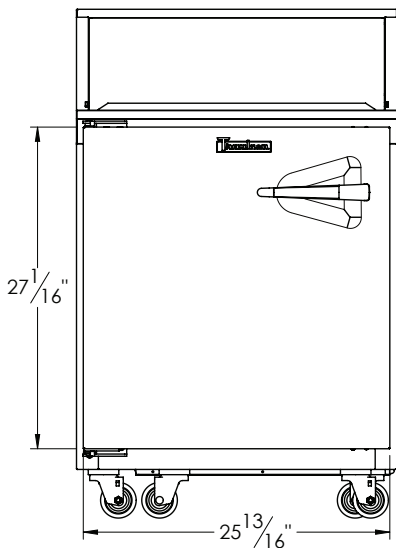

**ELEVATION**

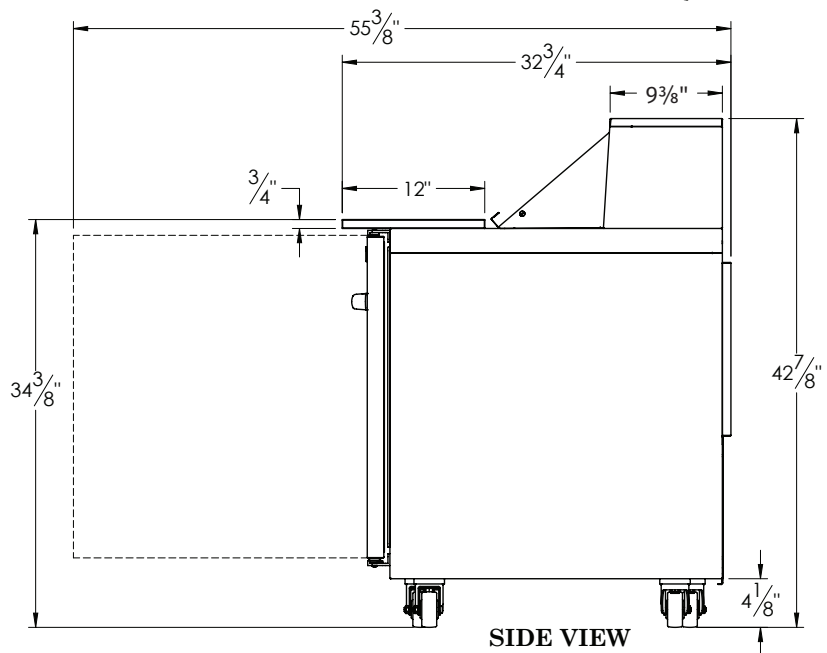


**SIDE VIEW**


# UPT SERIES

Compact Sandwich Prep Tables with  
Raised Cover/Self-Contained



**MODEL:**  
UPT279-L

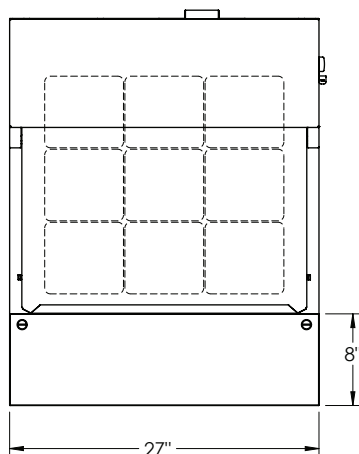

**TOP VIEW**

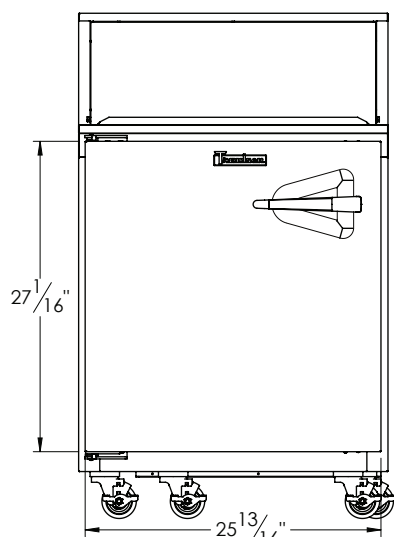

**ELEVATION**

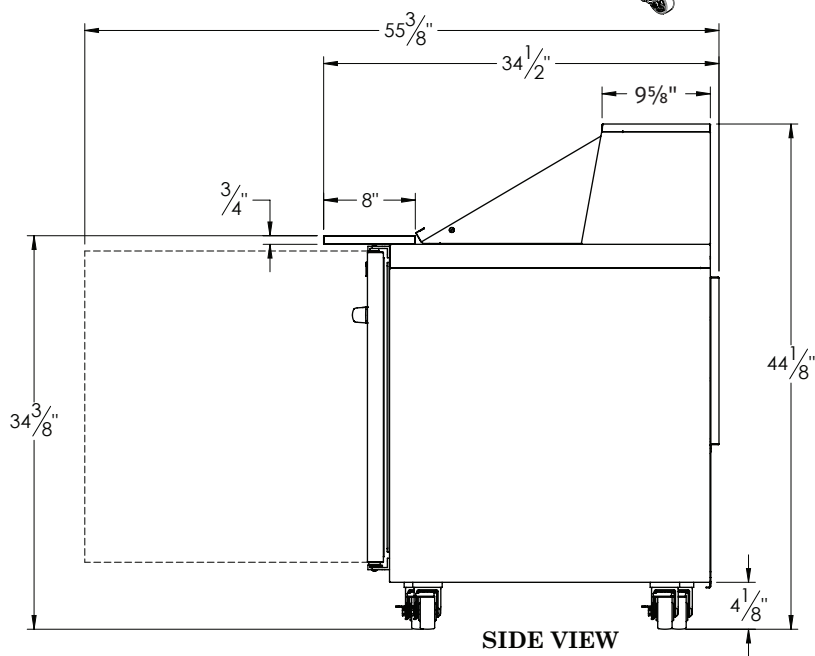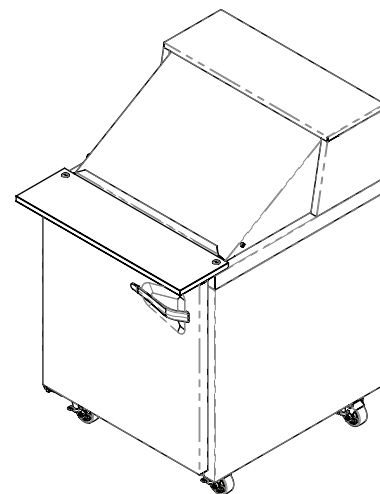

**SIDE VIEW**



## UPT SERIES

Compact Sandwich Prep Tables with  
Raised Cover/Self-Contained

### MODELS:

UPT276-L, UPT276-R, UPT279-L, UPT279-R

### EQUIPMENT SPECIFICATIONS

| MODELS                                | UPT276                                     |  | UPT279                                    |  |
|---------------------------------------|--------------------------------------------|--|-------------------------------------------|--|
| DIMENSIONAL DATA                      |                                            |  |                                           |  |
| Net Capacity cu. ft.                  | 7.7 (218 l)                                |  |                                           |  |
| # of 1/6 Size Pan Top                 | 6                                          |  | 9                                         |  |
| Length - overall in.                  | 27 (68.6 cm)                               |  |                                           |  |
| Depth - overall in. <sup>1</sup>      | 32¾ (83.2 cm)                              |  | 34½ (87.6 cm)                             |  |
| Depth - door open 90° in.             | 55⅞ (140.7 cm)                             |  |                                           |  |
| Clear door width in.                  | 25 <sup>13</sup> / <sub>16</sub> (65.6 cm) |  |                                           |  |
| Clear door height in.                 | 27 <sup>1</sup> / <sub>16</sub> (68.7 cm)  |  |                                           |  |
| Depth - cutting board in.             | 12 (30.5 cm)                               |  | 8 (20.3 cm)                               |  |
| Height - overall on 4" casters        | 42 <sup>7</sup> / <sub>8</sub> (108.9 cm)  |  | 44 <sup>1</sup> / <sub>8</sub> (112.1 cm) |  |
| Work Height on 4" casters             | 34¾ (87.3 cm)                              |  |                                           |  |
| # of Doors                            | 1                                          |  |                                           |  |
| # of Shelves                          | 2                                          |  |                                           |  |
| Total Shelf area sq. ft               | 4.88 (1.5 m)                               |  |                                           |  |
| ELECTRICAL DATA (NEMA 5-15P attached) |                                            |  |                                           |  |
| Voltage                               | 115/60/1                                   |  |                                           |  |
| Full Load Amps                        | 7.2                                        |  |                                           |  |
| REFRIGERATION DATA                    |                                            |  |                                           |  |
| Refrigerant                           | R-290                                      |  |                                           |  |
| Refrigerant Amount oz.                | 3 (85 g)                                   |  |                                           |  |
| BTU/HR <sup>2</sup>   H.P.            | 1680   1/5 HP                              |  |                                           |  |
| SHIPPING DATA                         |                                            |  |                                           |  |
| Length - crated in.                   | 45 (145 cm)                                |  |                                           |  |
| Width - crated in.                    | 42 (107 cm)                                |  |                                           |  |
| Height - crated in.                   | 56 (142 cm)                                |  |                                           |  |
| Volume - crated cu. ft.               | 53 (1502 l)                                |  |                                           |  |
| Weight - crated lbs.                  | 254 (115 kg)                               |  |                                           |  |

#### NOTES:

1. Overall depth includes standard cutting board.
2. Based on a 90° F ambient and 20°F evaporator

#### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, sides, pan cover lid and doors are constructed of stainless steel. Cabinet interior and door liners are constructed of anodized aluminum. The exterior cabinet back at the bottom are constructed of galvanized steel.

Doors self close at less than 90 degrees and also includes a stay open feature at 105 degrees. Gasket profile and material simplify cleaning and increase overall gasket life.

Both the cabinet and doors are insulated with an average of 2" thick high density non-CFC, foamed in place polyurethane. A ¾" thick, full-length, reversible white nylon cutting board is supplied standard.

#### PANS & COVER

Each model is supplied standard with its full compliment of 4" deep plastic 1/6 size pans and stainless steel pan dividers. The lid is constructed of stainless steel, and is easily removable for cleaning.

#### REFRIGERATION SYSTEM

A balanced, rear mounted, front breathing, self-contained refrigeration system using environmentally friendly R-290 refrigerant is provided. It features a capillary tube metering device, air cooled hermetic compressor, a forced air evaporator coil and a non-electric condensate evaporator. An 8' cord and plug is provided. Standard operating temperature of the refrigerated base is 34° to 38°F (1.1° to 3.3°C).

#### CONTROLLER

An electronic digital control is supplied standard. It includes a 3-Digit LED display, and a Fahrenheit or Celsius temperature scale display capability.

#### INTERIOR

Standard interior arrangements include two (2) powder coated wire shelves per door, mounted on pilasters. These are adjustable in ½" (1.27 cm) increments, allowing for a minimum of 1½" (3.81 cm) spacing between shelves.

#### WARRANTY

Both a six year parts and labor warranty and a seven year compressor parts warranty (self-contained models) are provided standard.

When ordering please specify: Voltage, Hinging, and Options.

Equipped with one NEMA 5-15P Plug 