



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



G-3-CBSS

OPTIONS:

- ☐ 14 gauge tops
- ☐ Thermostat
- ☐ Adaptor plates
- ☐ Spillage Pans
- ☐ Veneered plastic laminate panels on body
- ☐ Work Shelves
- ☐ Food shields
- ☐ Trayslides

AGENCY LISTINGS:



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

Specification subject to change



Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Steamtables

Hot Food Units - Gas - Standard

- ☐ G-2-CBPG/G-2-CBSS 2 top openings
- ☐ G-3-CBPG/G-3-CBSS 3 top openings
- ☐ G-4-CBPG/G-4-CBSS 4 top openings
- ☐ G-5-CBPG/G-5-CBSS 5 top openings
- ☐ G-6-CBPG/G-6-CBSS 6 top openings

TOP:

- 16 gauge, 300 Series stainless steel
- Top openings die - stamped. 11 7/8" X 19 7/8"

HEAT COMPARTMENTS:

- Individual burners
- Individual adjustable gas valves
- Individual galvanized steel radiation plates
- Safety pilots
- Gas pressure regulator for unit
- 2500 BTU/hour per burner
- 12" x 20" stainless steel liner, 8" deep

BODY AND INTERIOR SHELF:


- ☐ 300 Series stainless steel
- or
- ☐ paint grip steel
- End panels
- 6" polished stainless steel adjustable legs
- Stainless steel vented control panel
- Wire knob guards

THURMADUKE® STEAMTABLES - HOT FOOD - GAS - STANDARD


Catalog No. TST-STGASHOT

A.I.A. File No. 35-C-13


Thurmaduke®

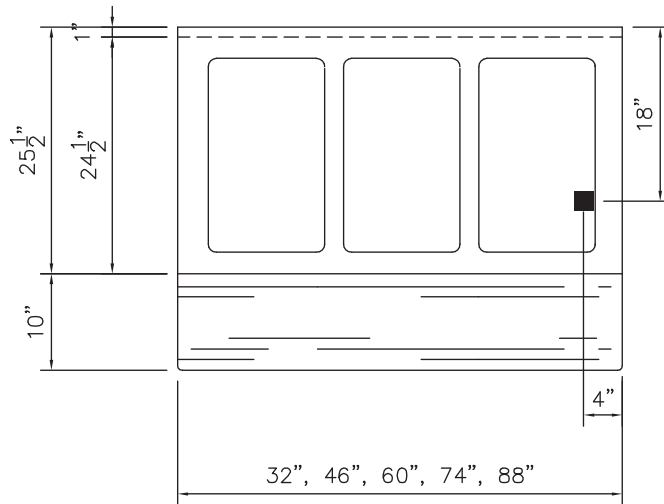

TOP VIEW

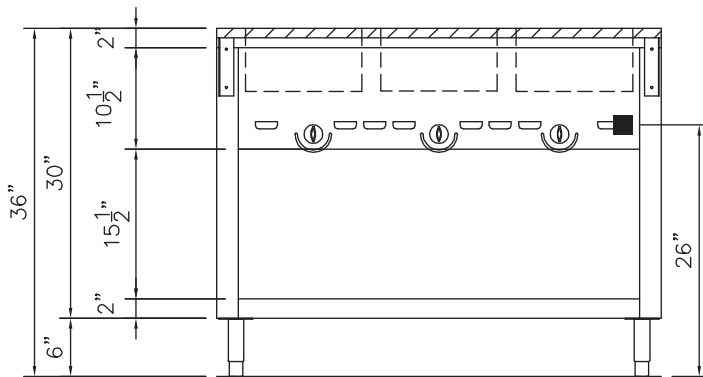

FRONT VIEW

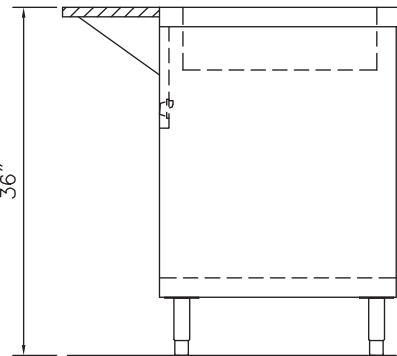

RIGHT SIDE VIEW

POWER SUPPLY		
Model	# of Burners	Total BTU
G-2-CBPG/SS	2	5,000
G-3-CBPG/SS	3	7,500
G-4-CBPG/SS	4	10,000
G-5-CBPG/SS	5	12,500
G-6-CBPG/SS	6	15,000
■ GAS CONNECTION - 1/2" I.P.S		

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
G-2-CBPG	G-2-CBSS	32	81.3	25-1/2	64.8	36	91.4	2	27.0	210	95.5
G-3-CBPG	G-3-CBSS	46	116.8	25-1/2	64.8	36	91.4	3	38.1	264	120.0
G-4-CBPG	G-4-CBSS	60	152.4	25-1/2	64.8	36	91.4	4	49.2	344	156.4
G-5-CBPG	G-5-CBSS	74	188.0	25-1/2	64.8	36	91.4	5	60.2	433	196.8
G-6-CBPG	G-6-CBSS	88	223.5	25-1/2	64.8	36	91.4	6	71.3	527	239.5

NOTE: Specify natural gas or propane gas when ordering.

For high altitude orifice, specify elevation.

Sliding doors NOT available, casters not available

NO combustible materials should be stored on the bottom shelf of gas unit

**Duke Manufacturing Co.**2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130

Toll Free: 1-800-735-3853

Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A

© 2019, Duke Manufacturing Co.