



HEATED HOLDING TRANSPORT CABINETS

For Various Size Trays, Pans, and Gastro-Norm

TOP MOUNT "TST" SERIES

Built-in Top Mount heat system provides a slim cabinet profile, yet meets demands for high capacity

- 1** Narrow spaces are no problem with the slim design of the TST series - these cabinets fit easily into tight spaces without sacrificing needed capacity
- 2** Made for transport applications - FWE cabinets are fully constructed of stainless steel with a tubular welded base frame designed to absorb vibration and shock during transport
- 3** Adjustable, no-tip tray slides - trays and pans will not tip even when pulled out halfway - allows for easier "hands-free" access to contents of the cabinet
- 4** TST series features FWE's Top Mount heat system, which eliminates hot and cold spots by gently circulating hot air throughout the interior of the cabinet
- 5** Top mounted elements are protected from spillage and leaves the bottom of the cabinet open for easy cleaning, reducing maintenance and cleaning costs
- 6** Simple to Use Electronic Control, User Friendly, Easy to Read & Easy to Set. Temperature Set Range of 90°F to 190°F (32°C to 88°C). Provided with a Low Temperature Alarm

****Two year limited warranty***



TST-19



TST-16



TST-10



Built For Transport



Adjustable No-Tip Tray Slides



Open Bottom Base



Control Panel




CE IP X4

Topmount

SPECIFICATIONS

HEATED HOLDING TRANSPORT CABINETS

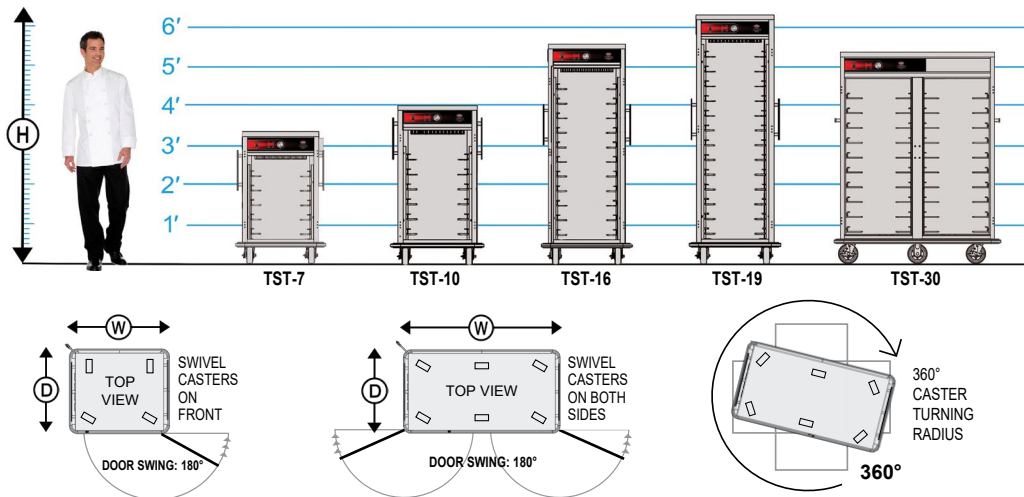

CAPACITIES OF TRAYS/PANS: 4.5"(114 mm) Spacings are Standard [A]													CLASS 100					
MODEL NUMBER	STANDARD CAPACITY: NUMBER OF TRAYS/PANS @ 4.5" SPACINGS (114mm)					OPTIONAL CAPACITY: NUMBER OF TRAYS/PANS @ 3" SPACINGS (76mm)					OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)		
	TRAY/PAN SLIDES PROVIDED	18 x 26	12 x 20	14 x 18	18 x 13	GN 1/1	TRAY/PAN SLIDES REQUIRED	18 x 26	12 x 20	14 x 18	18 x 13	GN 1/1	HIGH "H"				DEEP "D"	WIDE "W"
TST-7 Slim-Line	5 pr	5	5	10	10	5	7 pr (2 pr)	7	7	14	14	7	41" (1041)	34.75" (883)	28.25" (718)	1	5"	305 (138)
TST-10 Slim-Line	6 pr	6	6	12	12	6	10 pr (4 pr)	10	10	20	20	10	48" (1219)	34.75" (883)	28.25" (718)	1	5"	325 (147)
TST-16 Slim-Line	11 pr	11	11	22	22	11	16 pr (5 pr)	16	16	32	32	16	68" (1727)	34.75" (883)	28.25" (718)	1	5"	395 (179)
TST-19 Slim-Line	13 pr	13	13	26	26	13	19 pr (6 pr)	19	19	38	38	19	76" (1930)	34.75" (883)	28.25" (718)	1	5"	410 (186)
TST-30 Slim-Line	20 pr	20	20	40	40	20	30 pr (10 pr)	30	30	60	60	30	64.5" (1632)	32.25" (820)	50.75" (1290)	2	6"	575 (261)

[A] Uprights punched on 1.5" (38mm) centers. Tray slides are adjustable. Number of tray slides are listed above. Standard spacings are 4.5" (114 mm).

Single Door TST models are available with:
Pass-thru Door [add "P"]
See-thru Lexan Door [add "L"]
Dutch Doors [add "D"]
Note: Dutch Doors are 2 half size doors only on full-size models.

Note: The heat discharges from the rear on the "Slim-Line" cabinet design. The heat discharges side-to-side in the "Pass-Thru" cabinet design.

ELECTRICAL DATA			
MODEL NUMBER	TST-7, TST-10, TST-16, TST-19		
VOLTS	120	208	220-240
WATTS	1700	1535	1985
AMPS	14.2	7.4	8.3
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
PLUG USA	5-15P*	6-15P	6-15P
PLUG CANADA	5-20P	6-15P	6-15P
MODEL NUMBER	TST-30		
VOLTS	120	208	220-240
WATTS	2200	1980	2580
AMPS	18.3	9.6	10.8
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
PLUG USA	5-20P*	6-15P	6-15P
PLUG CANADA	5-30P	6-15P	6-15P

*Dedicated circuit.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing plates at corners.

INSULATION. Insulated throughout; top, back, bottom, sides, doors using high density ceramic and fiberglass insulation.

HANDLES. Heavy-duty, solid formed 1" x .375" thick; mounted at each end of unit. Mountings reinforced with stainless steel channel.

BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

DOORS AND LATCHES. Flush mounted, field reversible, stainless steel insulated door. High temperature gasket sealed; gasket shall be cabinet mounted. Doors shall have heavy-duty edgmount die cast hinges. Full-size doors on TST-16 and TST-19 models shall have three hinges. Magnetic door latch shall be edgmounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.

CASTERS. Polyurethane tire casters with Zerk grease (lubrication) fittings in a configuration of two (2) rigid, and two (2) swivel with brake on single-door models. The TST-30 has a caster configuration of two (2) rigid, and two (4) swivel with brake. Casters shall have a reinforced yoke welded to 10 gauge caster mounting plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

TRAY SLIDES. Welded rod-style tray slides are nickel plated for greater durability and sanitation. Fully adjustable / removable and designed to give secure bottom tray support. No-tip tray guide keeps 18" x 26" trays upright even when partially pulled out for increased accessibility. Removable stainless steel uprights shall be punched on 1.5" (38mm) spacing for easy tray/pan adjustment, and shall easily lift off of heavy-duty, stainless steel brackets without the use of tools. Each pair of tray slides shall accommodate: (1) 18" x 26", (2) 14" x 18" trays, (1) 12" x 20" or (1) GN 1/1.

HEATING SYSTEM / CONTROLS. Top mounted, forced air blower system shall include Hi-Temp, self-lubricated, impedance protected, fan-cooled blower motor to distribute heat equally throughout cabinet interior with distribution tunnels shall be vented for balanced air circulation. Electronic controls shall include an easy to read digital display of cabinet temperature (with recall capacity

of temperature set point and actual cabinet temperature), equipped with a programmable low temperature alarm, master ON/OFF switch with power indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C).

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical chart for models that require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

- ELECTRIC**
 - ☐ Mechanical controls
 - ☐ 220 volt, 50/60 Hz, single phase
 - ☐ Upgraded element
- DOORS**
 - ☐ Key locking door latch
 - ☐ See-thru Lexan door
 - ☐ Dutch doors
 - ☐ Pass-thru door
 - ☐ Paddle latch
 - ☐ Padlocking transport latch
 - ☐ Left hand door hinging - Single door models
- SPACINGS**
 - ☐ Extra tray slides
 - ☐ Fixed rack
 - ☐ Welded-in-place extruded aluminum angle ledge for 18"x26" trays at 1.5" spacings
- CASTERS**
 - ☐ All swivel or larger casters
 - ☐ Floorlock (requires 6" casters)
- EXTRAS**
 - ☐ Security packages
 - ☐ Cord winder bracket
 - ☐ X-factor frame
 - ☐ Thermal barrier wall for heated/ambient configurations
 - ☐ Passive water pan
 - ☐ Tubular s/s handles
 - ☐ Shelf for bulk cabinets

FOOD WARMING EQUIPMENT COMPANY, INC.

5599 HWY. 31 W. Portland, TN 37148

800-222-4393 | WWW.FWE.COM | SALES@FWE.COM

COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS



FWE products may be covered under one or more of the following U.S. patents: 288,299; 238,300; 3,952,609; 4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.
© 20 Food Warming Equipment Company, Inc. | R.20.01