



PROJECT:

MODEL:

QUANTITY:

ITEM NO:

# HEAVY-DUTY UTILITY CARTS

## For Multi-Purpose Back-Up

### “UC SERIES” and “UCU SERIES”

## STAINLESS STEEL



UCU-409



UCU-512

**These heavy-gauge stainless steel, super tough carts carry 200 pounds per shelf!**

Transport, serve, store or bus with FWE's super heavy-duty Queen Mary "UC Series" and "UCU Series" mobile utility carts. These rugged mobile back-up units are built incredibly tough – tough enough to safely take loads of up to 1600 lbs. Each reinforced stainless steel shelf has over 9.5 square feet of working space - enough to carry three large serving trays. Models are available with 3, 4, 5 or 6 (24" x 57") shelves, and can be ordered with edges flanged up or down.

FWE's utility carts are designed to last longer than any other - *period!* Welded construction and our exclusive tubular stainless steel base frame ensure that our cabinets will endure the most rigorous operations and environments. Durable stainless steel takes the abuse of transport applications and allows for sanitary maintenance. Super-duty 8" casters are mounted to reinforcement plates for added durability and take the impact over threshold. So when you need a utility cart that performs year after year, day-in and day-out, make your choice FWE. . . the "Choice of the Professionals".



- ◇ 16-gauge stainless steel reinforced shelves
- ◇ 10-gauge corner reinforcements
- ◇ All stainless steel
- ◇ All welded construction - no rivets (extra welds at critical points)
- ◇ Tubular stainless steel welded base frame
- ◇ Full extension bumper
- ◇ Super-duty 8" polyurethane casters
- ◇ Choice of shelf flange - up or down
- ◇ Two year limited warranty



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

# SPECIFICATIONS:


## HEAVY-DUTY UTILITY CARTS For multi-purpose back-up

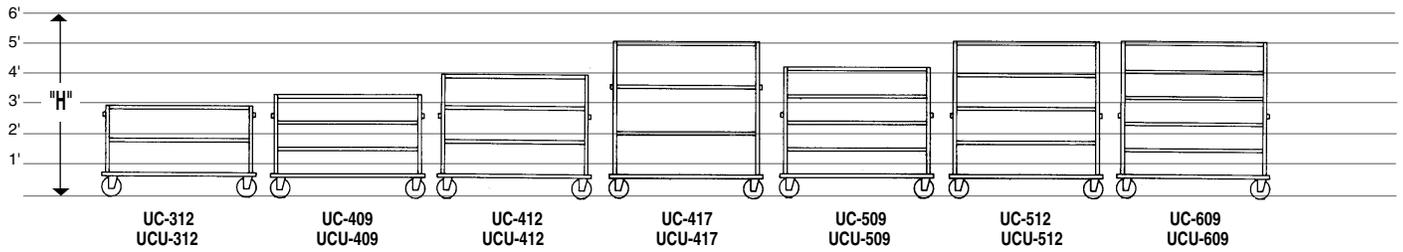

"Top View"



Shelf Edges Down



Shelf Edges Up

3 Sides Up - Front Edge Down

MODEL NUMBER	NUMBER OF SHELVES	SHELF CLEARANCE (mm)	SHELF SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN. (mm)			CASTER SIZE	Consult Factory for SHIPPING CLASS	
				HIGH "H"	DEEP "D"	WIDE "W"		SHIP WT. LBS. (KG)	CUBIC FEET (m <sup>3</sup> )
<b>UC-312</b> Shelf edges down	3	12" (305)	24" x 57" (635 x 1448)	38.5" (925)	28" (711)	62" (1575)	8"	200 (90)	38.67 (1.09)
<b>UC-409</b> Shelf edges down	4	9.5" (241)	24" x 57" (635 x 1448)	44.5" (1130)	28" (711)	62" (1575)	8"	225 (102)	44.7 (1.27)
<b>UC-412</b> Shelf edges down	4	12" (305)	24" x 57" (635 x 1448)	52" (1600)	28" (711)	62" (1575)	8"	235 (106)	52.24 (1.48)
<b>UC-417</b> Shelf edges down	3	17" (241)	24" x 57" (635 x 1448)	67" (1702)	28" (711)	62" (1575)	8"	270 (122)	67.31 (1.9)
<b>UC-509</b> Shelf edges down	5	9.5" (241)	24" x 57" (635 x 1448)	55.5" (1397)	28" (711)	62" (1575)	8"	265 (120)	55.75 (1.58)
<b>UC-512</b> Shelf edges down	5	12" (305)	24" x 57" (635 x 1448)	65.5" (1651)	28" (711)	62" (1575)	8"	295 (133)	65.80 (1.86)
<b>UC-609</b> Shelf edges down	6	9.5" (241)	24" x 57" (635 x 1448)	66.5" (1689)	28" (711)	62" (1575)	8"	310 (140)	66.80 (1.89)
<b>UCU-312</b> Shelf edges up	3	12" (305)	24" x 57" (635 x 1448)	38.5" (925)	28" (711)	62" (1575)	8"	200 (90)	38.67 (1.09)
<b>UCU-409</b> Shelf edges up	4	9.5" (241)	24" x 57" (635 x 1448)	44.5" (1130)	28" (711)	62" (1575)	8"	225 (102)	44.7 (1.27)
<b>UCU-412</b> Shelf edges up	4	12" (305)	24" x 57" (635 x 1448)	52" (1600)	28" (711)	62" (1575)	8"	235 (106)	52.24 (1.48)
<b>UCU-417</b> Shelf edges up	3	17" (241)	24" x 57" (635 x 1448)	67" (1702)	28" (711)	62" (1575)	8"	270 (122)	67.31 (1.9)
<b>UCU-509</b> Shelf edges up	5	9.5" (241)	24" x 57" (635 x 1448)	55.5" (1397)	28" (711)	62" (1575)	8"	265 (120)	55.75 (1.58)
<b>UCU-512</b> Shelf edges up	5	12" (305)	24" x 57" (635 x 1448)	65.5" (1651)	28" (711)	62" (1575)	8"	295 (133)	65.80 (1.86)
<b>UCU-609</b> Shelf edges up	6	9.5" (241)	24" x 57" (635 x 1448)	66.5" (1689)	28" (711)	62" (1575)	8"	310 (140)	66.80 (1.89)

\*Shelf edges up\* models have 3 sides up with the front edge down.

**CONSTRUCTION.** Heliarc welded construction of stainless steel. Welded tubular base frame shall be 1.5" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing stress plates at corners. Uprights shall be 10-gauge stainless steel. **BUMPER.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond handles for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

**CASTERS.** 8" Super-duty (extra-wide) polyurethane tire casters with Zerk grease (lubrication) fittings in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge castor mounting plate. The castor mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**PUSH BARS.** Two (2) heavy-duty, 1" diameter tubular stainless steel push handles welded in place.

**SHELVES.** Shelves shall be heavy-duty 16-gauge, type stainless steel, die-formed. Underside of each shelf shall be reinforced with extra heavy-gauge stainless steel, welded to 10-gauge stainless steel corner angles. Each shelf shall be capable of carrying up to 200 lbs. of distributed load. All models shall have the top shelf with edges flanged down.

### Optional Accessories:

- All swivel or larger/smaller casters
- Enclosed on 3 sides
- Oversized models
- Custom shelf spacing
- HDM - 10 year warranty

**FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.**



### Food Warming Equipment Company, Inc.

P.O. Box 1001  
Crystal Lake, IL 60039 USA  
800-222-4393; 815-459-7500  
Fax: 815-459-7989

Manufacturing Facilities:  
7900 S. Route 31  
Crystal Lake, IL 60014 USA  
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.  
All specifications subject to change without notice.  
© 07C Food Warming Equipment Company, Inc.