

HUMIDIFIED HEATED HOLDING TRANSPORT CABINETS

Universal – For Various Size Trays, Pans, and Gastro-Norm

TEMP SET RANGE: 90° – 190°F (32° – 88°C) 

HUMI-TEMP “UHS” SERIES

The most versatile and best performing heated bulk food cabinet on the market today




- 1 Unique design holds 12" x 20" pans, 18" x 26" sheet trays or GN containers on fully adjustable tray slides. Slides are removable for thorough interior cleaning
- 2 Humidity can be added to condition circulated heat, keeping food fresh and hot for hours
- 3 FWE's patented Humi-Temp heat and humidity system eliminates hot and cold spots by gently circulating hot, moist air throughout the interior of the cabinet
- 4 Controls are up-front, easy to read and set, and include a full-range °F/°C thermostat for easy operation. Thermometer continuously reads cabinet temperature – even without power source!
- 5 Made for transport applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport
- 6 Energy Star Approved - save money and protect the environment with the energy star approved UHS-12
- 7 Available for immediate shipment - FWE's popular UHS-12 is available to ship within 48 hours (Quick Ship terms and conditions apply)

***Two year limited warranty**



Adjustable Tray Slides



Humidity Pan



Control Panel





Built For Transport

HUMI TEMP

SPECIFICATIONS

HUMIDIFIED HEATED HOLDING TRANSPORT CABINETS

→ CORD EXITS AT BOTTOM LEFT REAR CORNER

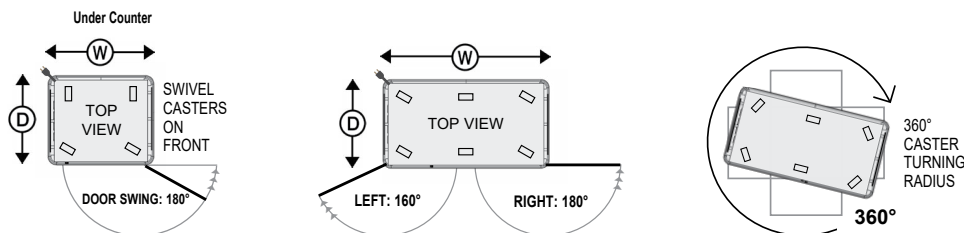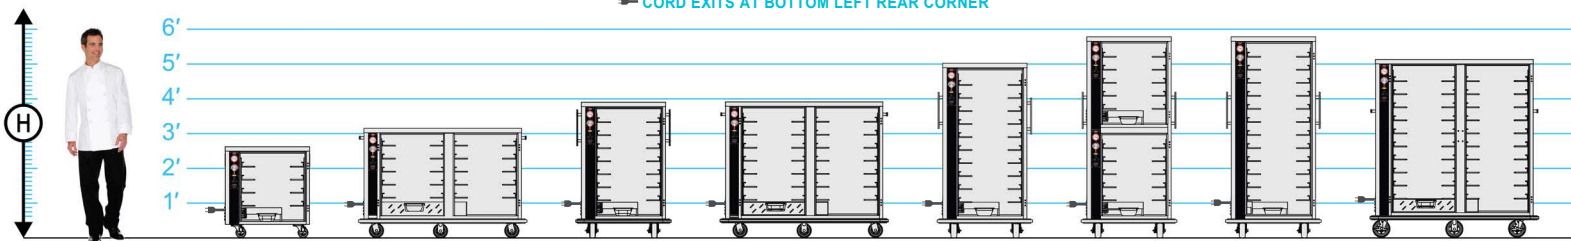

CAPACITIES OF TRAYS / PANS: 4.5" (114 mm) Spacings are Standard [A]																				OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CONSULT FACTORY FOR SHIPPING CLASS		
MODEL NUMBER	TRAY/PAN SLIDES PROVIDED	STANDARD CAPACITY @ 4.5" Spacings (114 mm)							OPTIONAL CAPACITY @ 3" Spacings (76 mm)							HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)				
		18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 2/1	GN 1/1	MAX/PAN	TRAY/PAN SLIDES REQUIRED (ADDITIONAL)	18 x 26	12 x 20	14 x 18	18 x 13							20 x 22	10 x 20	GN 2/1	GN 1/1
	4 pr	4	8	8	8	4	8	4	4	6 pr (2 pr)	6	12	12	12	6	12	6	12	6	31.5" (801)	31.75" (807)	29.75" (756)	1	3.5"	225 (102)
	10 pr	10	20	20	20	10	20	10	20	14 pr (4 pr)	14	28	28	28	14	28	14	28	14	38" (966)	33.5" (851)	58.5" (1486)	2	5"	365 (166)
	7 pr	7	14	14	14	7	14	7	14	10 pr (3 pr)	10	20	20	20	10	20	10	20	10	47" (1194)	33.5" (851)	33.25" (845)	1	5"	265 (120)
	14 pr	14	28	28	28	14	28	14	28	20 pr (6 pr)	20	40	40	40	20	40	20	40	20	47" (1194)	33.5" (851)	58.5" (1486)	2	5"	390 (177)
	10 pr	10	20	20	20	10	20	10	20	15 pr (5 pr)	15	30	30	30	15	30	15	30	15	60.5" (1537)	33.5" (851)	33.25" (845)	1	5"	330 (150)
	10 pr 5 ea cavity	10	20	20	20	10	20	10	20	14 pr (4 pr)	14	28	28	28	14	28	14	28	14	69.5" (1765)	33.5" (851)	33.25" (845)	2	5"	370 (168)
	12 pr	12	24	24	24	12	24	12	24	17 pr (5 pr)	17	34	34	34	17	34	17	34	17	69.5" (1766)	33.5" (851)	33.25" (845)	1	5"	350 (159)
	12 pr	12	24	24	24	12	24	12	24	17 pr (5 pr)	17	34	34	34	17	34	17	34	17	69.5" (1766)	34.5" (877)	33.25" (845)	2	5"	420 (191)
	20 pr	20	40	40	40	20	40	20	40	30 pr (10 pr)	30	60	60	60	30	60	30	60	30	61.75" (1567)	33.5" (851)	58.5" (1486)	2	6"	500 (227)

[A] Universal tray slides accommodate:
(1) 18" x 26", (2) 12" x 20", (2) 14" x 18",
(2) 18" x 13", (1) 20" x 22", (2) 10" x 20" trays/pans.
Uprights punched on 1.5" (38 mm) centers. Universal
tray slides are adjustable. Number of tray slides are
listed above. **Standard spacings are 4.5" (114 mm).**

UHS-5-5 Split Cavity Capacity:
provides 2 compartments, each
with separate controls; 5 pair of
tray slides are provided in each
compartment.

UHS models are available with:
Pass-thru Door [add "P"]
See-thru Lexan Door [add "L"]
Dutch Doors [add "D"]
Note: Dutch Doors are 2 half size
doors only on full-size models.

*UHS-4 is an under-counter model. It is
provided without a bumper and with
all swivel casters and with form grip flush
in wall hand grips recess mounted on each
side of the unit. Bumper can be added as
an optional accessory.

*Dedicated Circuit.
▼ Lowest voltage shown is standard.

ELECTRICAL DATA			
MODEL NUMBER	UHS-4 UHS-7 UHS-12	UHS-5-5 Split Cavity	UHS-5-10 UHS-7-14 UHS-20
VOLTS	120	120	120
WATTS	1300	2130	1650
AMPS	10.8	17.8	13.8
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA	5-15P	5-20P*	5-15P*
PLUG CANADA	5-15P	5-30P	5-20P
VOLTS	220-240	220-240	220-240
WATTS	1538	2130	1935
AMPS	6.4	9.7	8
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA	6-15P	6-15P	6-15P
PLUG CANADA	6-15P	6-15P	6-15P

CONSTRUCTION. Heliarc welded, single
unit construction of stainless steel; 20 gauge
polished exterior, 22 gauge stainless steel
interior with easy-to-clean covered corners.
Welded tubular base frame shall be 1" square,
heavy gauge stainless steel tubing, with 10
gauge stainless steel reinforcing plates at
corners.

INSULATION. "Ultra-Guard" UG-26 high
density fiberglass insulation throughout; top,
back, bottom, sides, and door(s).

HANDLES. Heavy-duty push bar handles, solid
formed 1"x .375" thick; mounted at each end
of unit. Mountings reinforced with stainless
steel channel. UHS-4 is provided with form grip
flush-in-wall hand grips recess mounted on
each side of unit.

BUMPER. Solid 1.5" wide continuous
wraparound aluminum channel, bolted to
frame, with snap-in, non-marking vinyl cushion.
Full perimeter bumper extends beyond doors,
handles, etc., for added protection. Shall be
continuous, with corner cut-outs to facilitate
cleaning. UHS-4 is standard without a bumper.

DOORS AND LATCHES. Flush mounted,
stainless steel insulated doors. High
temperature gasket sealed; gasket shall be
cabinet mounted. Each door shall have two
(2) heavy-duty edgemoount die cast hinges.
Door latch shall be edgemoounted, full grip,
and positive closing. The hinge and latch mountings
are reinforced with stainless steel backing
plates. UHS-5-5P, UHS-12P, UHS-20, UHS-20P
are provided with magnetic edgemoount door
latches.

CASTERS. Maintenance free polyurethane tire
casters in a configuration of two (2) rigid and
two (2) swivel with brake. Two door models
shall have a caster configuration of two (2)
rigid and four (4) swivel with brake. UHS-4 shall
have a caster configuration of four (4) swivel
with brake. Casters shall have a reinforced
yoke mounted to 10 gauge caster plate. The
caster mounting plate shall be secured to a 10
gauge stainless steel reinforcing stress plate
via welded in place stainless steel studs. The
reinforcing stress plates shall be welded to the
heavy gauge tubular frame of the unit.

TRAY SLIDES. Welded rod-style tray slides
are nickel plated for greater durability and
sanitation. Fully adjustable / removable and
designed to give secure bottom tray support.
Removable stainless steel uprights shall be
punched on 1.5" spacings, on center, for easy
tray adjustment, and shall easily lift off heavy-
duty stainless steel brackets without the use of
tools for cleaning.

HEATING SYSTEM / CONTROLS. Patented
built-in "Humi-Temp" system shall include an
Incoloy nickel-chromium alloy heating element
and Hi-Temp, self-lubricated, impedance
protected fan-cooled blower motor. Cabinet
shall have humidifying chamber and drawer
Style baffled humidifier pan. Both shall be
stainless steel and removable. Controls shall be
up-front, recessed and shall include a full range
thermostat adjustable to actual temperature.
Thermostat shall include temperature scale
marked in ten degree increments (F/C) from 90°
to 190°F (32° to 88°C). An operational range
thermometer, power supply light, thermostat
cycling light, and 20 amp ON/OFF switch are
also included.

ELECTRICAL CHARACTERISTICS. 3 wire
grounded tri-directional power cord and plug,
rear mounted for safety. See electrical data
chart above for amperage and receptacle
configuration. See electrical chart for models
that require a dedicated circuit.

INSTALLATION. Unit should not be installed
in an area where adverse environmental
conditions are present.

ELECTRICAL

Electronic controls
Upgraded element: 220 volt

DOORS

Dutch doors
See-thru Lexan door
Key locking door latch
Paddle latch
Magnetic latch
Padlocking transport latch
Left hand door hinging

SPACINGS

Fixed rack assembly
Extra tray slides
Shelves

CASTERS

Larger casters
All swivel (4 caster base only)
Floorlock (requires 6" casters)

EXTRAS

Security packages
X-factor frame (consult factory)
Tubular stainless steel push handles
Cord winder bracket
Top bumper
Heat retention battery