



# SERVING STATIONS

## DROP-IN HOT WELL MODELS 9560

Electric operated, stainless steel drop-in hot food well unit w/ individual die-stamped 12" x 20" top openings, individual thermostatically controlled sealed food wells designed for wet operation. Controls mounted on separate pre-wired s/s control panel. Unit is totally pre-wired to junction box for single-point field connection.

**SHORT FORM SPEC:** Drop-in hot food well unit with individual die-stamped 12" x 20" top openings, electrically heated sealed food wells. Separate pre-wired s/s control panel houses individual thermostatic controls. Unit is totally pre-wired to junction box for single-point field connection. UL Listed, NSF.

### AVAILABLE MODELS:

Note: xxx = voltage; 120, 208, 240

D = Drains, M=Manifolds

9560-1-xxxDM  
9560-2-xxxDM  
9560-3-xxxDM  
9560-4-xxxDM  
9560-5-xxxDM  
9560-6-xxxDM  
9560-2N-xxxDM (Slim)  
9560-3N-xxxDM (Slim)

### STANDARD FEATURES:

- Designed for wet operation
- Individually controlled wells for maximum operator control
- True thermostatic control for precise food temperatures
- Die stamped, raised sanitary rim pan openings in stainless steel top
- Available for 120V, 208V, or 240 volt operation
- Drain(s) with common valve provided/installed

**UNIT TOP:** Top to be one piece 18 gauge stainless steel. Top openings to be die-stamped with raised perimeter rims.

**FOOD WELLS:** Units fitted with compliment of 12" x 20" x 6 1/2" deep, electrically heated, sealed food wells with individual thermostatic controls, designed for wet operation. Unit prewired to controls, mounted on separate stainless steel panel.

**UNIT BODY:** Fully insulated exterior body of corrosion resistant steel.

**CONTROLS:** Thermostatic controls (prewired to junction box) mounted on separate stainless steel panel for field installation in counter front. Each control has a lighted on/off power indicator. Connections to heating elements to be located outside of heated zone to avoid wiring deterioration.

Certifications:  

|               |       |
|---------------|-------|
| PROJECT NAME: |       |
| LOCATION:     |       |
| ITEM NO:      |       |
| QTY:          |       |
| MODEL NO:     |       |
| AIA NO:       |       |
| SIS NO:       |       |
| CSI SECTION:  | 11400 |



9560-4 Shown

### OPTIONS/ACCESSORIES:

Adaptor Bars  
Extended Thermostatic Lead  
Auto Water Fill (see 9560AWF spec sheet)

### ADDITIONAL RESOURCES:

[Request A Quote](#)



[Sales Tools](#)

[Find A Rep](#)



[KCL AutoCAD/Revit](#)

**Serving Stations**  
**SP SHT1917 RevD**  
05/25



9560-1-D





9560-2-DM





9560-3-DM






9560-4-DM

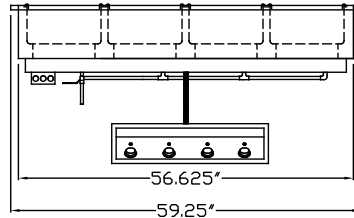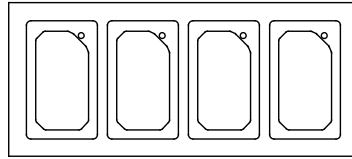



9560-5-DM

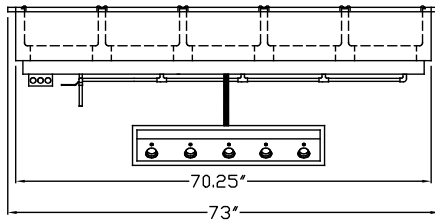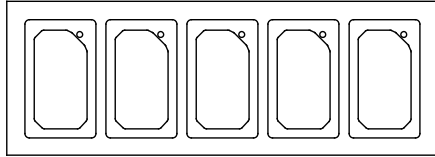




9560-6-DM

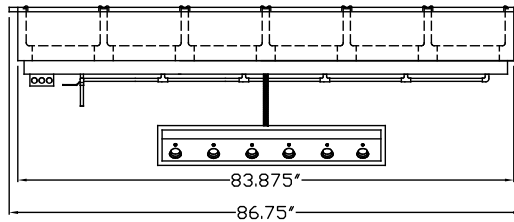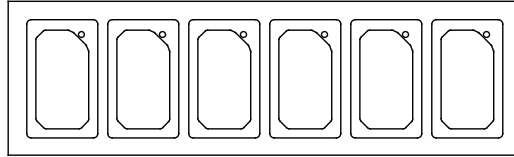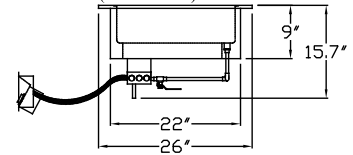
9560-x-D/DM  
(END VIEW)


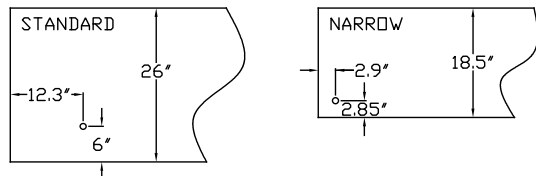
9560-2N-DM



9560-3N-DM

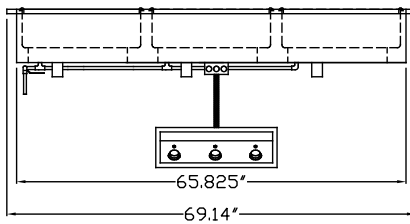
9560-xN-DM  
(END VIEW)


#### DRAIN VALVE LOCATION:



| Model*                 | Length | Width | Pan Capacity<br>12" x 20" | Unit Cutout Size  | Control Panel<br>Cutout Size | Amps<br>120V | Amps<br>208V | Amps<br>240V | Approx.<br>Weight |
|------------------------|--------|-------|---------------------------|-------------------|------------------------------|--------------|--------------|--------------|-------------------|
| WITH DRAINS & MANIFOLD |        |       |                           |                   |                              |              |              |              |                   |
| 9560-1-xxxD            | 18.5"  | 26"   | 1                         | 16.125" x 22.5"   | 14.25" x 5.75" x 6"          | 9.2          | 5.3          | 4.6          | 60                |
| 9560-2-xxxD            | 31.75" | 26"   | 2                         | 29.875" x 22.5"   | 14.25" x 5.75" x 6"          | 18.4         | 10.6         | 9.2          | 100               |
| 9560-3-xxxD            | 45.5"  | 26"   | 3                         | 43.5" x 22.5"     | 20" x 5.75" x 6"             | 27.6         | 15.9         | 13.8         | 140               |
| 9560-4-xxxD            | 59.25" | 26"   | 4                         | 57.125" x 22.5"   | 26" x 5.75" x 6"             | 36.8         | 21.2         | 18.4         | 180               |
| 9560-5-xxxD            | 73"    | 26"   | 5                         | 70.75" x 22.5"    | 32" x 5.75" x 6"             | 46           | 27.5         | 23           | 220               |
| 9560-6-xxxD            | 86.75" | 26"   | 6                         | 84.375" x 22.5"   | 38" x 5.75" x 6"             | 55.2         | 31.7         | 27.6         | 260               |
| 9560-2N-xxxD           | 47.6"  | 18.5" | 2                         | 45.264" x 16.125" | 14.25" x 5.75" x 6"          | 18.4         | 10.6         | 9.2          | 100               |
| 9560-3N-xxxD           | 69.2"  | 18.5" | 3                         | 66.327" x 16.125" | 20" x 5.75" x 6"             | 27.6         | 15.9         | 13.8         | 140               |

Power supply requires hard wiring to "J" box. \*Note: xxx represents voltage; 120, 208, 240