

**S23-1061****Individual Pivoting Barrier-Free Wall Shower**

- Ideal for Barrier-Free Shower Room
- Industry Unique Hinge Design for Quick and Easy Installation and Maintenance
- Completely Preassembled and Ready to Mount to a Wall
- Flexible Supply Connections

Specifications**Materials**

Shower panel is type 300 Series stainless steel. All other exposed parts are stainless steel or chrome-plated brass. Supply inlets are flexible stainless steel hoses.

Standard Equipment**Shower Panel**

Shower panel is constructed of 18 gauge stainless steel. Top and bottom covers are riveted onto shower panel.

Hinges

Stainless steel barrel hinges to mount shower to wall.

Valve Type as Selected

For more information on each valve type, please visit the Shower Valves product section at www.bradleycorp.com.

Soap Dish

Standard soap dish option (SD) is a cake soap tray formed from heavy-gauge stainless steel with satin finish. Mounted to wall.

Showerhead

Showerhead is chrome plated brass with 1.5 GPM (5.7 LPM) flow control, ball joint and adjustable spray pattern control (B).

Hand Shower

Consisting of hand shower with on-off control, a 60" stainless steel flexible hose and post style mounting bracket to hold to shower panel. Elevated in-line backflow preventer with quick disconnect for flexible hose.

Diverter Valve

Lever handle operation for easy transfer of water flow between fixed showerhead and hand-held shower spray.

Supply Inlets

Supply inlets are 24" flexible, stainless steel hoses with 1/2" NPT connections. Inlets are accessible through back of shower or through knockouts in the top and bottom covers.

ADA Requirements

This shower complies with most, but not all, ADA dimensional requirements. Check local codes prior to installation.

Standard Selections (Must select one from each category)**Showerhead Height (select one)**

- ☒ **6'-0"** Standard Height

Valve Type (select one)*Hot/Tempered and Cold Supplies*

- ☒ **EF** Equa-Flo Pressure Balancing Valve
☐ **HD** Equa-Flo HD Pressure Balancing Valve
☐ **TMV** Thermostatic Mixing Valve

Single Tempered/Cold Supply

- ☐ **AST** Air Pushbutton
☐ **SVL** Single Compression Valve
☐ **TTPA** TouchTime Pushbutton**
☐ **TTPB** TouchTime Piezo Switch**

Showerhead Type

- ☐ **B** Axis Showerhead w/ Ball Joint (Flow Rate = 1.5 GPM/5.7 LPM)
☐ **S15** Standard Showerhead (Flow Rate = 1.5 GPM/5.7 LPM)
☒ **S20** Standard Showerhead (Flow Rate = 2.0 GPM/7.6 LPM)

**WS-1X-HN****Optional Selections****Ball Joint Type†**

- ☐ **LBJ** Lockable Ball Joint
☐ **NONE** No Ball Joint

Supply Stop Type (select one)

- ☐ **ST** Stops in Supplies for Valves
☐ **NONE** No Supply Stops

Soap Type (select one)

- ☐ **SD** Standard Soap Dish***
☐ **NSD** No Soap Dish (Standard)

Slide Bar Type (select one)

- ☐ **SB** 24" Slide Bar (currently available on WS-1X-HN model only)
☐ **NONE** No Slide Bar

Slope Top Type (select one)

- ☐ **SL** Sloped Top
☐ **NONE** No Sloped Top

Shroud Type

- ☐ **SHV** Vertical Shrouds (floor to ceiling height _____ ft. _____ in.)*
☐ **SHH** Horizontal Shroud (per 3' section)*‡
☐ **NONE** No Shroud

Hardware Type (select one)

- ☐ **SC** Standard Screws
☐ **VS** Vandal Resistant Screws

*Non-cancelable, non-returnable

**TTPA and TTPB valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.

***Wall-mounted

† Only available on S15 and S20 Showerheads.

‡ Submittal drawings required.

Verify all rough-in dimensions prior to installation.

Consult local and national codes: conformity and compliance to local and national codes is the responsibility of the installer.

2.0 GPM and 2.5 GPM showerhead flow rate does not meet California Energy Commission 20 CCR T.20, Div. 2, 1601-1609.

© 2019 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309

800 BRADLEY (800 272 3539) +1 262 251 6000



bradleycorp.com



S23-1061 Individual Pivoting Barrier-Free Wall Shower

Rough-In Dimensions

(mm)

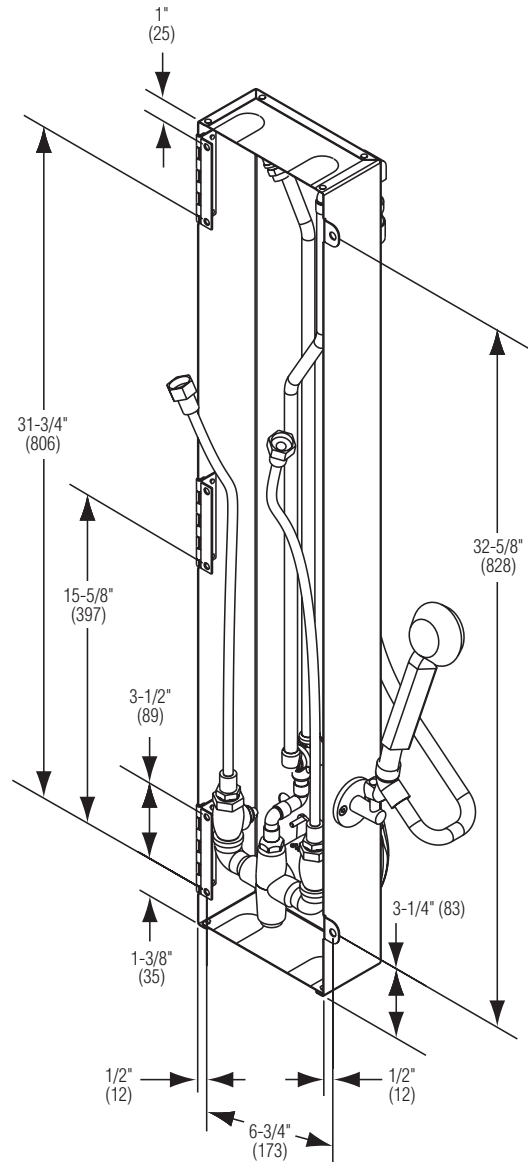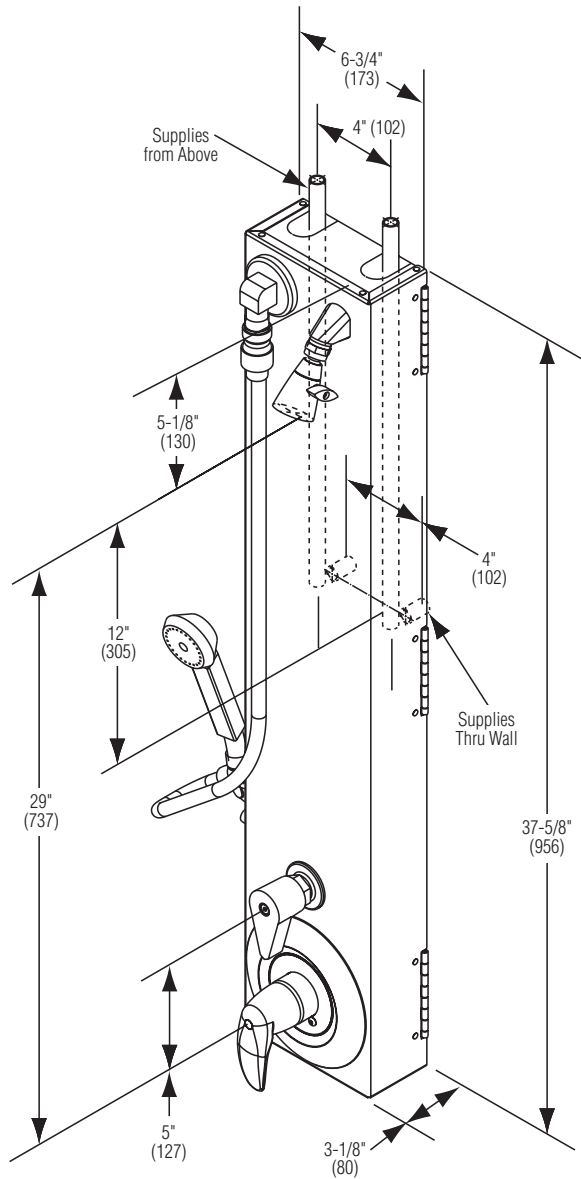

*Equa-Flo Valve shown. Valve location
and rough-ins same for other valves.*