



738243 (KCHRI81R3DR)

3-Door Full Height Refrigerator 81" Long

Description

3 full door refrigerator with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing door feature with lock and key. External temperature display.

Cabinet capable of accepting a full-size sheet pan (18X26).

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Internal LED lighting enhances visibility for quick and easy product identification, and minimal energy use.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting a full-size sheet pan (18X26)

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Front and rear ventilation panel design improves airflow for effective heat release from the refrigeration system.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- 60 mm insulation for energy saving.

Optional Accessories

PNC Code	Description
Containers, Trays and Grids	
880591	Shelf for 54" and 81" (left/right) Reach-In (Solid Door)
880592	Middle Shelf for 81" Reach-Ins (Solid Door)
880611	Shelf clips (4-pack)
880622	22-Sheet Pan Rack Kit. Fits KCHRI Models (Full Door)
880701	6-Sheet Pan Rack Kit. Fits KCHRI Models & KCHPT Models
880702	15-Sheet Pan Rack Kit. Fits KCHRI Models (Full Door)
Feet, Wheels and Ramps	
206445	1 Adjustable Foot
880745	2.5" Caster
880746	2.5" Locking Caster

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power max:	0.78 kW
Plug type:	USA NEMA 5-15P
Current consumption:	7.5 Amps
Compressor power:	3/4 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	72.1128 cu.feet
-----------------	-----------------

Key Information:

Number and type of grids (included):	9 (618x661/618x600)
Door hinges:	1 Left+2 Right
External dimensions, Width:	81 " (2057 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, height:	83 " (2108 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	27 1/2" (698.5 mm)
Internal Dimensions (height):	50 3/16" (1275.08 mm)
Internal Dimensions (width):	76 3/8" (1940.56 mm)
Net weight:	492 lbs (223 kg)
Shipping width:	83 11/16" (2125 mm)
Shipping depth:	34 1/16" (865 mm)
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	571 lbs (259 kg)
Shipping volume:	139.55 ft ³ (3.95 m ³)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5 °C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Back bottom


Sustainability

Refrigerant type:	R290
Refrigerant weight:	150 g


Front

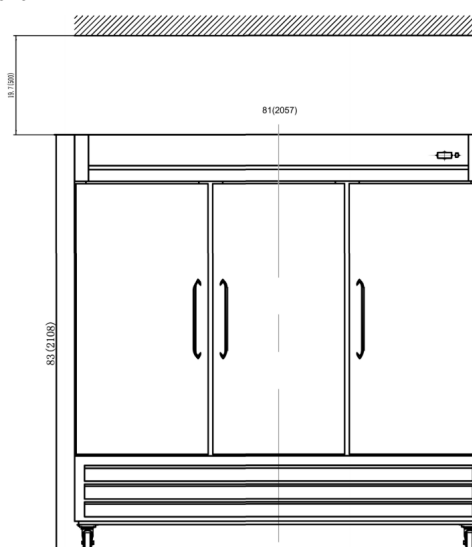

Side

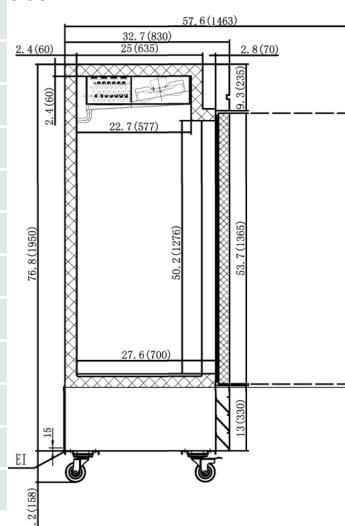

Top

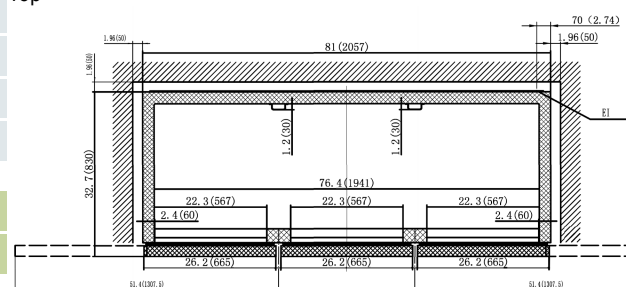

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet



Part of



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.
<https://www.kelvinatorcommercial.com>

2026/06/17

3/3