

Deck Mount Pitcher & Glass Fillers

ROYAL SERIES



Standard Features

- Adjustable flow rate
- Latch for continuous on position
- Push-back water activation
- Pedestal with adjustable flange

Specifications

Water Inlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Rough In	7/8" Round Hole
Flow Rate	0.25-1.5 GPM
Material	Chrome Plated Brass
Weight	2 lbs.

Model	Deck to Spout Tip (A)	Deck to Push Lever (B)	Deck to Top (C)	Overall Height (D)
16-135L	8"	4-15/16"	9-5/8"	11-5/8"
16-137L	10"	6-15/16"	11-5/8"	13-5/8"
16-138L	12"	8-15/16"	13-5/8"	15-5/8"
16-139L	14"	10-15/16"	15-5/8"	17-5/8"

Product Compliance


- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2012/CSA B125.1-12
- Massachusetts Approved



Repair Kit for Pitcher & Glass Fillers (model 16-136L)



- Used on Glass Filler (16-135L) or Pitcher Fillers (16-137L, 16-138L, 16-139L)
- Repairs latch mechanism to avoid replacing entire faucet

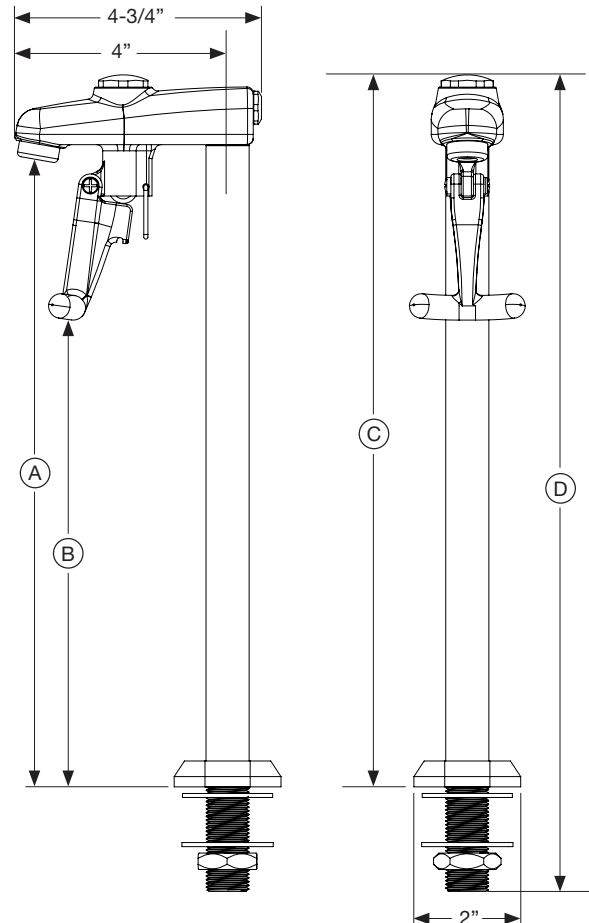

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.cdph.ca.gov/Programs/CID/DCDC/Pages/ToxicSubstances/HazardousSubstances.aspx