

Single Hole Wall Mount Remote Faucets

ROYAL SERIES



16-140L

16-142L

Standard Features

- Controlled by knee or foot valve (16-406L & 16-407L)
- Durable full range swing spout with double o-ring construction
- 2.2 GPM aerator included
- 90-degree elbow included


Specifications

Water Inlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Rough In	7/8"
Material	Chrome Plated Brass

Model	Spout Length (A)	Spout Height (B)	Spout Type	Weight	Flow Rate
16-140L	3-1/2"	5-5/6"	Wide Goose-neck	1.5 lbs.	0.5 GPM
16-141L	6"	2"	Swing	1.5 lbs.	1.5 GPM
16-142L	8"	2-3/8"	Swing	1.5 lbs.	0.5 GPM
16-143L	10"	2-3/4"	Swing	1.75 lbs.	0.5 GPM

Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2012/CSA B125.1-12
- Massachusetts Approved
- CEC Approved

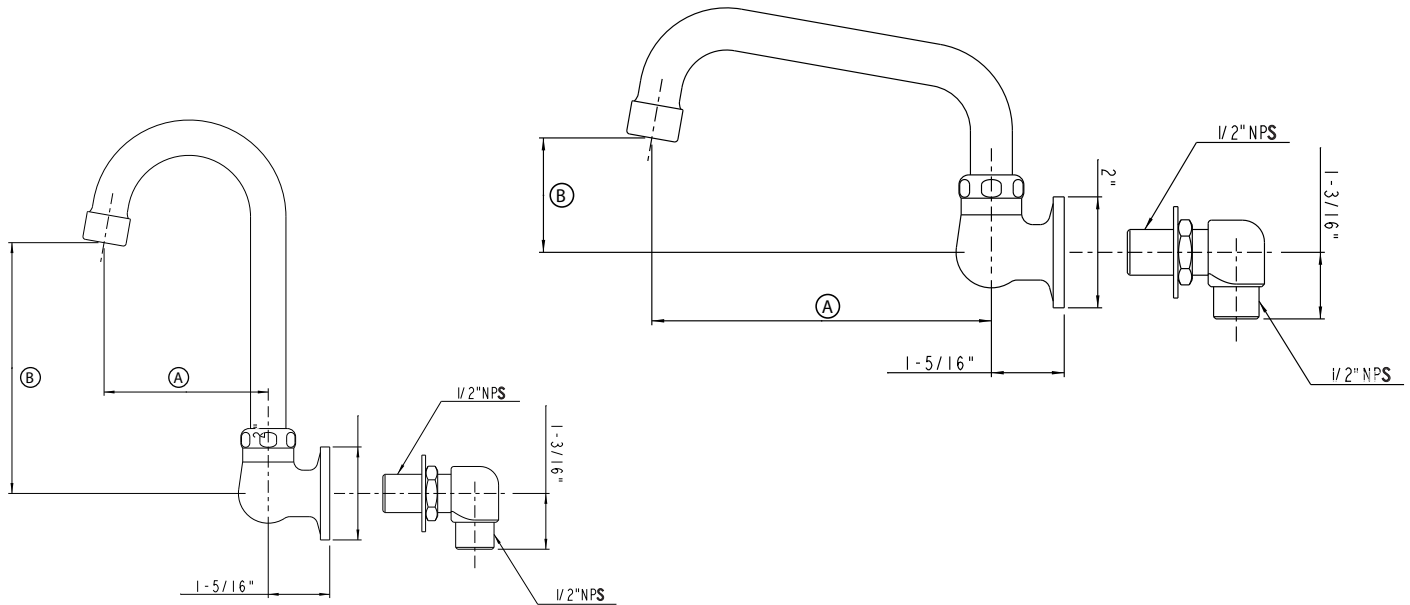

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.