



Model: **16-190** Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

Electronic Sensor Faucet Single Hole Wall Mount with 4-1/2" Wide Gooseneck Spout

Royal Series



DESCRIPTION

- Battery Powered Electronic Sensor Faucet with Control Module, Mechanical Mixing Valve, Supply Hoses & Mounting Hardware. Polished Chrome Finish, 4-1/2" Wide Gooseneck Spout, 2.2 GPM Female Threaded Aerator Installed

STANDARD FEATURES

- Single Hole Wall Mount
- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Built-In Filter to Prevent Debris from Entering Solenoid Valve
- Low Battery Indicator Light
- Battery Life 1-3 Years Based on Usage
- Warranty: 3 Years

PRODUCT COMPLIANCE

- ASME A112.18.1-2011/CSA B125.1-11
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)
- CEC Listed
- Massachusetts Approved



SPECIFICATIONS

| | |
|------------------------|-----------------|
| Water Inlet | 3/8" Male NPS |
| Temp. Range | 40°F - 180°F |
| Water Pressure | 20 -120 PSI |
| Sensor Type | Infrared |
| Flow Rate | 2.2 GPM |
| Default Time Out | 30 seconds |
| Default GPC | 1.10 |
| Default Shut-Off Delay | 1 Second |
| Default Auto Flush | Off |
| Sensor Range | 3/4" - 8-1/4" |
| Battery Life | 500,000 cycles |
| Material | Solid Brass |
| Finish | Polished Chrome |
| Weight | 7 lbs. |


WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.
 California Proposition 65 Warning



Model: **16-190** Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

Electronic Sensor Faucet Single Hole Wall Mount with 4-1/2" Wide Gooseneck Spout

Royal Series

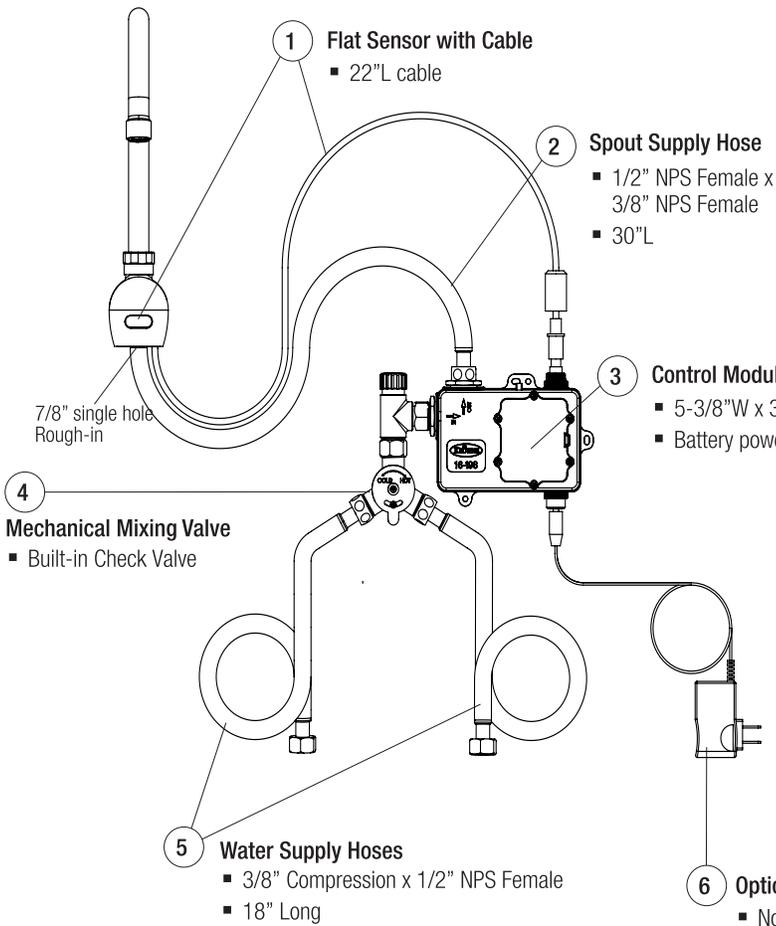

| No. | Replacement Parts | Model |
|-----|-------------------------|---------|
| 1 | Flat Sensor with Cable | 16-505 |
| 2 | Spout Supply Hose | 16-512 |
| 3 | Control Module | 16-198 |
| 4 | Mechanical Mixing Valve | 16-402L |
| 5 | Water Supply Hoses | 16-510 |
| 6 | Optional AC Adapter | 16-199 |

| Flow Control | Setting | | | | | | | |
|----------------|---------|-----|-----|-----|-----|----|----|-----|
| Shut-Off Delay | 1s | 10s | | | 15s | | | |
| Auto Flush | ON | | | | OFF | | | |
| Auto Time Out | 15s | 20s | 25s | 30s | 45s | 1m | 2m | 10m |

Default Flow Control Setting Highlighted in Gray

6 Optional AC Adapter
 ■ Not included

