



Model: **16-670** Item #: _____ Date: _____
Project: _____ Qty: _____ Approved By: _____

Electronic Sensor Faucet 4" Center Wall Mount with 4-1/2" Double Bend Spout

Royal Series



DESCRIPTION

- Battery Powered Electronic Sensor Faucet with Control Module, Mechanical Mixing Valve, Supply Hoses & Mounting Hardware. Brushed Nickel Finish, 4-1/2" Double Bend Spout, 2.2 GPM Female Threaded Aerator Installed

STANDARD FEATURES

- 4" Center Wall Mount
- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Built-In Filter to Prevent Debris from Entering Solenoid Valve
- Low Battery Indicator Light
- Battery Life 1-3 Years Based on Usage
- Warranty: 3 Years

PRODUCT COMPLIANCE

- ASME A112.18.1-2011/CSA B125.1-11
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)
- CEC Listed
- Massachusetts Approved



SPECIFICATIONS

Water Inlet	3/8" Male NPS
Temp. Range	40°F - 180°F
Water Pressure	20 -120 PSI
Sensor Type	Infrared
Flow Rate	2.2 GPM
Default Time Out	30 seconds
Default GPC	1.10
Default Shut-Off Delay	1 Second
Default Auto Flush	Off
Sensor Range	3/4" - 8-1/4"
Battery Life	500,000 cycles
Material	Solid Brass
Finish	Brushed Nickel
Weight	7 lbs.

WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.
California Proposition 65 Warning

Krowne Metal Corporation • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • customerservice@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.


Rev. 10/2020 • No. 16-670



Model: **16-670** Item #: _____ Date: _____
Project: _____ Qty: _____ Approved By: _____

Electronic Sensor Faucet 4" Center Wall Mount with 4-1/2" Double Bend Spout

Royal Series

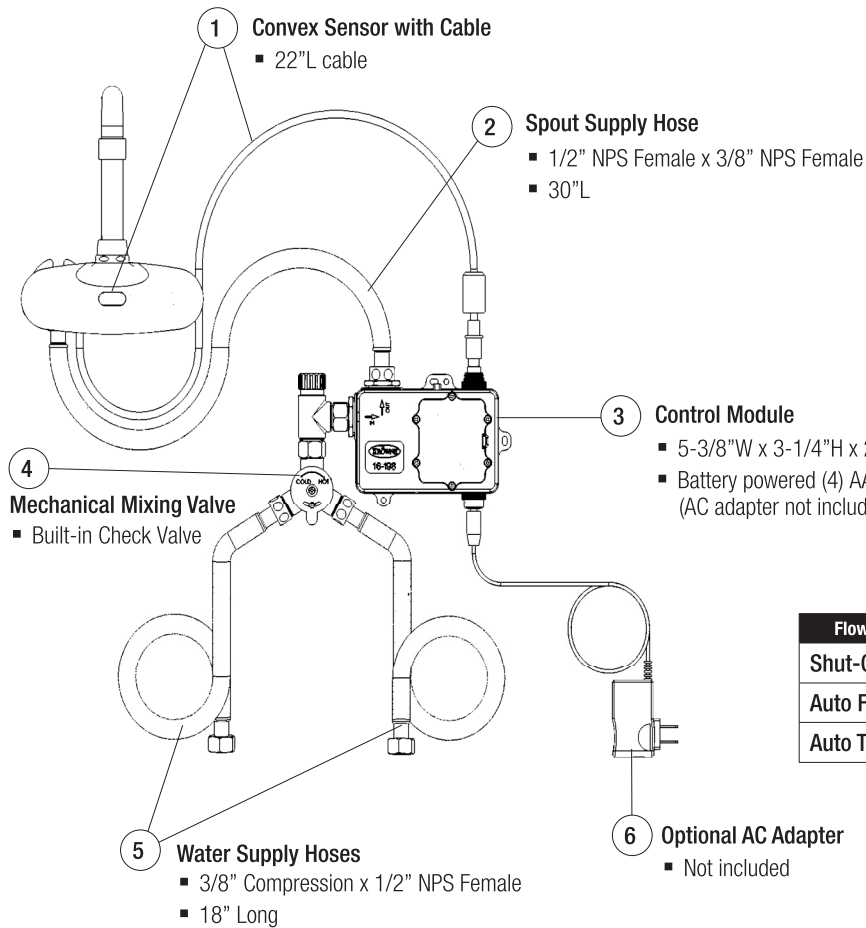

No.	Replacement Parts	Model
1	Flat Sensor with Cable	16-505
2	Spout Supply Hose	16-512
3	Control Module	16-198
4	Mechanical Mixing Valve	16-402L
5	Water Supply Hoses	16-510
6	Optional AC Adapter	16-199

Flow Control				Setting				
Shut-Off Delay	1s		10s			15s		
Auto Flush	ON				OFF			
Auto Time Out	15s	20s	25s	30s	45s	1m	2m	10m

Default Flow Control Setting Highlighted in Gray

